

DRFM Dike D - Geotechnical Investigation Report

FINAL - REVISION NO. 0



Issue Date: September 17, 2021

Project No.: 21.2311.002 Doc No.: D-RPT-GEO-20210917-01



SWEETTECH Engineering Consultants 145 3rd Ave W Drumheller, AB TOJ 0Y0

CONFIDENTIAL

TABLE OF CONTENTS

1.				
2. 3.			OCATION AND DESCRIPTION	
3.			ECHNICAL INVESTIGATION	
			_D INVESTIGATION	
			L CONDITIONS	
	3.3.1	1	EXISTING DIKE AND UNDERLYING FILL SOILS	. 5
	3.3.2	2	SILT & SAND	. 6
	3.3.3	3	SILT	. 7
	3.3.4	4	SAND	. 7
	3.3.5	5	CLAY	. 7
	3.4	LAE	BORATORY TESTING	. 7
	3.4.:	1	MOISTURE CONTENT (ASTM D2216)	. 8
	3.4.2	2	PARTICLE GRADATION RESULTS (ASTM D422)	. 8
	3.4.3	3	ATTERBERG LIMITS TESTS (ASTM D4318)	. 9
	3.4.4	4	UNCONFINED COMPRESSION TEST (ASTM D2166)	. 9
	3.5	GRO	DUNDWATER CONDITIONS	. 9
			L PERMEABILITY CONDITIONS	
			ECHNICAL ASSESSMENT	
			VIOUS FLOOD CONDITIONS AND DURATIONS	
			L DESIGN PARAMETERS	
			PAGE AND PIPING	
			PE STABILITY	
			5MIC STABILITY	
			JNDATION BEARING CAPACITY AND SETTLEMENT	
	4.7	STR	UCTURES IN AND THROUGH DIKE	17
	4.8	PRC	DPOSED DIKE FILL SOIL REQUIREMENTS	18
	4.9	RET	AINING WALL RECOMMENDATIONS	18
5.			JSSION	
6.				
7.	K	ᄃᄃ타	RENCES	Z T

LIST OF APPENDICES

Appendix 1: Borehole Location Plan Appendix 2: Borehole Logs Appendix 3: Lab Test Reports Appendix 4: Stability and Seepage Analysis

1. INTRODUCTION AND BACKGROUND

This report documents the findings and recommendations of a geotechnical site investigation performed by SweetTech Engineering Consultants (SweetTech) on the existing and proposed Dike D footprint in Drumheller. This investigation was undertaken to inform the detailed dike design and forms a key component of the Drumheller Dike D Preliminary Design Process.

Dike D is an approximately 1,200 m long earth fill dike located in Central Drumheller along the right bank of the Red Deer River. Dike D protects the Civic Heart of the Valley, Downtown Drumheller. Critical infrastructure located within Downtown Drumheller including the Fire Department, City Hall, Police Station, the Badlands Community Facility, the Arena, Aquaplex, and vital historical, cultural, and tourism facilities.

The current Dike D was conceived from a provincial Flood Abatement Work Group (FAWG) and was constructed in three phases between 1987 and 1991. In addition, extensive riverbank reconstruction work was completed along Riverside Drive in the late 1960s and 1970s.

This present scope of work involves designing improvements and upgrades to Dike D to reduce flooding risks and protect Drumheller into the 22nd century (for the design flow). Dike D is planned to be upgraded to a design flow of 1,850 m3/s along the Red Deer River with consideration for adaptive emergency response management allowing for an emergency dike raise to manage flows of 2,100 m3/s and greater.

Utilizing the 1,850 m3/s design flow rate, it was determined that the existing dike would need to be raised about 0.8 to 1.25 m along most of the alignment (which includes a 0.75 m freeboard). A portion of the existing dike situated along Riverside Drive, currently has a 0.75 m high concrete jersey barrier that is considered part of the existing flood protection system situated on the crest of the dike and in this area the jersey barrier will be removed and replaced with an earth fill dike and possibly a retention system. Upwards of 2.1 m of earth fill will be required to construct the dike upgrades in this area along Riverside Drive. This area can be seen on Figure 1 in Appendix 1.

This geotechnical assessment was performed to determine requirements and recommendations for raising the dike up to 2.1 m with select earth fill and widening the dike as needed to provide a minimum 6 m top width and 3 horizontal to 1 vertical (3H:1V) side slopes.

The following reports were reviewed in preparation of this geotechnical report:

- SweetTech Draft Concept Design and Feasibility Study (Feb 2021)
- Drumheller River Hazard Study Open Water Hydrology Assessment Report Northwest Hydraulic Consultants (2020);
- Drumheller Community Facility Geotechnical Investigation Thurber (2006);
- Drumheller Dike D Construction Field Reports EBA (1987);
- Landale Development Corporation Soils Report Palm Engineering (1999); and
- Geotechnical Investigation Proposed Hotel and Restaurant Development Lot 2, Block 34, Plan 991 1179, Drumheller Alberta ParklandGeo (2014).

2. SITE LOCATION AND DESCRIPTION

The existing alignment and proposed Dike D alignment and extents are shown on Figure 1. The existing Dike D is a 1200 m long, earth filled dike topped with a paved asphalt trail for approximately 2/3 of its length, from the Gordon Taylor Bridge to Riverside Drive. The southern portion of the dike along Riverside Drive consists of a concrete pathway and jersey barrier situated on the existing dike crest. The height of the existing dike varies from approximately 0.5 m to 2 m above the adjacent ground for most of the entire length of Dike D.

The existing vegetation around the proposed dike footprint consists primarily of grass, shrubs (willows) and local trees, primarily poplars. The shrubs (and same trees) are on the river side of the dike, between the existing dike and the Red Deer River. The existing dike side slopes have been vegetated with grass and in the park areas the grass was observed to have been trimmed along the dike. Between Riverview Terrace and the Badlands Community Facility the toe of the dike on the land side has been constructed around 4 trees, where timber crib retaining walls have been constructed into the dike to protect the trees.

Some tree and brush clearing was previously performed in fall 2019 along Dike D, primarily at the south end and along Riverside Drive. The river side of the concrete jersey barrier flood wall had not been maintained and there was extensive growth of shrubs and trees. When the geotechnical drilling program was performed, this vegetation had mostly been cleared and was in the process of being removed.

The general topography around Dike D, is a steep riverbank which levels off around Dike D and continues to rise at a shallow slope into the downtown core. Dike D has been constructed on the crest of this bank, a short distance away from the active river channel. In the north, around Centennial Park, the floodplain is broad and has a shallow slope before dropping to the River, and downstream of Centennial Park, the riverbank is steep and is near vertical in some areas due to active riverbank erosion. At the south end of the proposed dike alignment (adjacent to the lift stations), the land slopes down to a lower flat shelf beside the river. This area will require approximately 5 m of fill to construct the dike. There are several large trees and shrubs in this fill zone that will need to be removed.

During recent flood events in 2005 and 2013, Dike D is understood to have been temporarily topped up with extra fill material in a rapid fashion. With exception to the poor performance of the asphalt pathway surface (longitudinal and lateral cracking), no known performance issues have been observed in the past with Dike D.

As seen in Figure 1, the proposed typical dike detail, minimum 6 m top width and 3H:1V side slopes, are suitable for most of the areas along the dike, however there are several areas where the design may need to deviate from this typical detail. These areas are at the northwest corner of the Aquaplex building, a portion of the northeast property line of the Riverview Terrace Condominiums and along Riverside Drive, as identified in Figure 1 in Appendix 1. These areas may need to vary from the typical detail due to space constraints with existing and proposed infrastructure and proximity to

the river. The flood barrier along Riverside Drive is currently constructed of concrete jersey barriers with a narrow (<2 m wide) walking path beside it. The portion of the dike alignment with jersey barriers is located between dike station D 0+806 to station D 1+100. If the typical dike detail (trapezoidal 3H:1V side slopes) is utilized in this area and instream river work is to be avoided, the entire width of Riverside Drive falls within the proposed dike footprint. As such, preliminary options for the Aquaplex and Riverview Terrace Condominiums involves the construction of a retention system on the landside of the dike to reduce the proposed footprint. Along Riverside Drive preliminary options include the construction of retaining walls, a combination of retaining walls and reconfiguring Riverside Drive and complete removal of a portion of Riverside Drive to allow for the typical dike section to be constructed. The specific layout, design details and materials for these areas have yet to be selected and further design and decision making from IBI Group and the DRFM is required prior to proceeding with the detailed design for these specific areas.



Image 1 - Riverside Drive Conflict Area

3. GEOTECHNICAL INVESTIGATION

SweetTech performed a geotechnical field drilling investigation and associated lab testing to inform the ongoing pre and detailed designs, allow for transmissivity of the existing dike soils to be addressed, assess the quality and quantity of existing fill soils, define the specific areas groundwater conditions and to verify competency of the underlying soils. The details of the subsurface investigation program are discussed and defined below.

3.1 SURFICIAL GEOLOGY

Based on a review of available surficial geology for the Drumheller area (A. Stalker, Geological Survey of Canada Memoir 370, 1973), the Dike D areas will generally consist of quaternary fluvial deposits (gravels, sands, silts and clays) which overlie cretaceous bedrock from the Edmonton Formation. The bedrock consists of grey, green and brown clay shale, argillaceous siltstone, and sandstone with coal beds and visible ironstone partings.

3.2 FIELD INVESTIGATION

A site reconnaissance was performed on February 19, 2021 by Andres Ocejo, P.Eng., and Thomas Schaepsmeyer, M.Eng., E.I.T. The site reconnaissance was used to plan the drilling investigation, identify potential conflicts with the typical 3H:1V dike section and inform our ongoing design efforts.

On March 17, 2021, 10 boreholes were drilled along the proposed Dike D footprint. The boreholes were spread out along the length of the alignment. The location of these boreholes is shown on the Location Plan, Figure 1. The following sampling and testing procedures were followed during the field program:

- SweetTech completed an Alberta One Call planning application along the entire Dike D footprint to reduce the potential for underground utility conflicts prior to selecting borehole locations.
- The borehole locations were staked out in the field and provided for client review prior to drilling.
- Prior to mobilizing the drilling rig, SweetTech completed an Alberta One Call and cleared the proposed borehole locations of underground utility conflicts.
- A private locate was performed by Line Hunter Locates and cleared the proposed borehole locations of underground utilities.
- Borehole BH-02's location was adjusted based on site conditions and concurrent treeclearing operations prior to drilling to minimize disturbance to existing flood infrastructure (jersey barrier system).
- The boreholes were drilled by All Service Drilling using a track mounted auger drilling rig (Geoprobe DR7822) using solid stem augers.
- Drilling operations were monitored by SweetTech's geotechnical staff. The soil encountered was visually examined during drilling and logged according to the Modified Unified Soil Classification System.
- Standard Penetration Tests were performed at selected depth intervals in all boreholes.
- At the completion of drilling, 50 mm hand-slotted PVC standpipes were installed in select boreholes. The remaining boreholes were backfilled with auger cuttings and bentonite chips.
- Nested PVC standpipes were installed at two boreholes (BH-04 & BH-05) to allow for insitu testing of hydraulic conductivity of the existing dike fill.
- Samples were taken in boreholes at 1.0 m intervals or with changes in stratigraphy to determine the soil/moisture profile.
- Soil samples were obtained off the solid stem auger flight (grab samples), from the split spoon sampler, and in 3 Shelby Tubes.
- Selected soil samples were bagged, numbered and delivered to Solum Consultants Ltd. for laboratory testing. All other soil samples were retained and stored at SweetTech's Calgary office for possible further testing.
- Groundwater levels were recorded on the day of drilling (March 17, 2021), one week later (March 25, 2021), and two weeks later (March 31, 2021).

• The location of the completed borehole locations was surveyed by Hunter Wallace Surveys Ltd. using a Trimble GPS receiver and a pole mounted Trimble GPS antenna. UTM coordinates and ground elevations are provided on the borehole logs in Appendix 2.

The area located between Dike D Station D1+080 and D1+195, was not accessible during the March 17th geotechnical investigation due to excessive vegetation. Once this area had been cleared of vegetation, two historical resource test pits were performed in this area on July 16, 2021. TP-01 was excavated at Dike D Station D1+101 and TP-02 was excavated at Station D1+166. During the historic resources assessment, SweetTech performed a bearing capacity assessment to a depth of 2 m utilizing a static cone penetrometer. The location of these test pits is shown on the Location Plan, Figure 1.

3.3 SOIL CONDITIONS

The soil profile along Dike D consisted of varying compositions of sand, silt and clay fill soils, with underlying deposits of fluvial silt and sand with random silty clay partings. Bedrock was not observed in this location and auger refusal was not encountered. Detailed soil conditions encountered for each borehole are described on the borehole logs attached in Appendix 2. The following is a description of the soil types encountered along the proposed and existing dike alignment.

3.3.1 EXISTING DIKE AND UNDERLYING FILL SOILS

The existing surficial soils around the Dike D site are believed to have been filled, recontoured, and changed over the past 100 years, and as such, the existing Dike D has not been constructed on native ground. Thurber reports anecdotal evidence of a landfill and filling of an old side channel of the Red Deer River (Thurber, 2006), while Palm Engineering reported that the elevation of the ground where Centennial Park is located had previously been filled in with 0.9-1.5 m of soil in the 1940's (Palm, 1999). In addition, Palm Engineering investigated the Riverview Terrace property and found that the fill in this area ranged from 1 m to 3.6 m in thickness and generally consisted of a sandy silt fill material.

Boreholes 2, 2A, 3, 3B, 4, 4C, 5, and 6 were all drilled through the existing dike, and were drilled approximately 0.3 m offset from the pathway located along the crest. The dike fill material was found to generally consist of varying mixtures of silt and sand with a low to high plastic clay fraction. Hydrometer testing of samples taken during drilling found clay contents in the material that varied from 21.8% to as high as 28.9%, the silt content varied from 34.3% to 46.3%, and the sand content was predominantly fine grained, varying from 21.3 to 41.3%. Gravel was found in all samples tested and ranged from 2.6 to 4.8% of the grainsize distribution. Liquid limits of the samples also ranged from 27% to 77% in the existing dike fill, with clay shale nodules being found in many of the samples. These results suggest that the fill was randomly mixed with high plastic, highly weathered clay shales and a moderate degree of variability in the fill materials hydraulic conductivity and plasticity is to be anticipated. A thin clay seam was observed in Borehole 2 within the dike fill material, further confirming the variability of the previously utilized fill materials for dike construction. SPT "N" values ranged from 14 to 68 blows per 300 mm penetration, indicating existing dike fill material is stiff to hard. In addition, one Unconfined Compression Test was completed on a sample recovered from

BH-04 at a depth of 0.76 m and resulted in an unconfined compressive strength of 145 kPa. Based on these results, the consistency of the existing dike fill material strongly indicates that the existing dike fill has been placed with an engineered compactive effort and based on a review of the construction information available from 1987, the dike fill material was compacted to \geq 98% Standard Proctor Maximum Dry Density (SPMDD). The moisture content of the dike fill material ranged from 4.3 to 23%, with most of the values ranging from 18 to 21%. The moisture contents are indicative of the material being placed at \pm 3% of the materials optimum moisture content (OMC). The presence of shale in the samples suggests that the dike fill was partially constructed from a reworked shale, which was used for the dike fill construction. This is consistent with field reporting from a 1987 EBA Engineering materials report from the field during construction of Dike D.

The underlying fill material below the existing dike fill was encountered at surface in Borehole 1 &7 and below surface in Boreholes 2, 3, 4, 5, and 6. The thickness of the underlying fill material varied throughout the Dike D alignment. The underlying fill thickness in the north area of the Dike (Approximately Dike D Station D 0+000 to Station D 0+664) ranged from 1.2 m to 2.0 m. In the south area of the Dike (Dike Station D 0+664 to Station D 1+211) underlying fill thicknesses ranged from 1.8 m to 5.2 m with fill thicknesses increasing as one progresses south on the dike alignment. The underlying fill generally consisted of sand and silt with trace to some quantities of clay. Hydrometer testing of samples taken during drilling found clay contents in the material that varied from 8.3% to as high as 23.5%, the silt content varied from 31.8% to 48.2%, and the sand content was predominantly fine grained, varying from 34.3 to 54.1%. Gravel was found in some samples tested and ranged from 0 to 3.2% of the grain size distribution. The underlying fill soils were found to predominantly have a low plasticity with random medium to high plastic partings noted. Two Atterberg Limit test were performed on this material and resulted in liquid limits of 27% and 47% with corresponding plastic limits of 21% and 24%, respectively. SPT "N" values ranged from 4 to 49 blows per 300 mm penetration, indicating underlying fill material ranges from soft to hard. The majority of the SPT "N" vales were found to range from 4 to 14 and provides a strong indication that these materials were not placed with compaction testing performed and that the degree of compaction attained on these soils is highly variable. The moisture content of the underlying fill soils was found to range from 8.5% to 35.2%, providing further verification of the variability of the fill materials composition and condition at the time of placements.

3.3.2 SILT & SAND

Deposits of silt and sand were encountered below the underlying fill in Boreholes 3, 6 and 7. This soil was composed of silt and fine grained sand, with trace to some clay. The material was found to generally have a slight plasticity and was found to have a highly variable consistency/density in its in-situ condition. The SPT "N" values for the material ranged from 3 to 19 indicating a very loose/soft to compact/very stiff material condition. The material was generally found to be in a loose condition along the north half of the dike alignment and improved to be in a compact condition for the southern half of the dike. The moisture content of the silt and sand ranged from 14.4% to 30.3%.

3.3.3 SILT

Deposits of silt were encountered in Borehole 1, 4 and 7 below the underlying and dike fill materials at a depth of 5.2, 4.3 and 2.6 m respectively. The silt was found to be sandy with trace to some clay and generally had a low plasticity in its in-situ condition. Three SPT "N" values were attained within the silt material and resulted in blow counts of 7, 9, and 32 indicating the material was generally firm to stiff, with the deposit having a hard consistency at the south extent of the dike alignment. The moisture content of the silt was found to range from 8.2% to 26%.

3.3.4 SAND

Deposits of sand were encountered in Borehole 2 and 7 underlying the existing native material, with a depth of 5.3 m to 4.4 m below existing ground surface, respectively. The sand was moderately graded between fine and coarse grained sand and was generally silty and gravely. One SPT "N" value was attained for the sand and resulted in a blow count of 25, indicative of a compact soil. The moisture content of the sand was found to be from 4.2% to 7.9%. This gravely sand layer generally coincides with the river elevation and is assumed to be an extension of the rivers fluvial channel sands and gravels.

3.3.5 CLAY

A deposit of clay was encountered below the underlying fill in Borehole 5 with a depth of 3.4 m below the ground surface elevation. The clay encountered was silty, with some sand, trace gravel and was observed to have a low to moderate plasticity. One SPT "N" value was attained in the material and resulted in 5 blows per 300 mm penetration, indicating a firm relative consistency. The moisture content of the clay was found to range from 17.5 to 23.6%.

3.4 LABORATORY TESTING

Obtained soil samples were organized and select soil samples which covered the different stratigraphic layers observed onsite were submitted to Solum Consultants Ltd. Geotechnical and Material Testing Laboratory in Calgary, Alberta, for index soil testing. Soils laboratory index testing included:

- 33 moisture content tests (ASTM D2216);
- 7 particle size analysis (ASTM D422);
- 7 Atterberg limits tests (D4318); and,
- 1 unconfined compression test (D9728).

Natural moisture contents were provided with particle size analysis and Atterberg limit tests.

The laboratory test results are discussed in this report and are attached in Appendix 3.

3.4.1 MOISTURE CONTENT (ASTM D2216)

Moisture contents were performed on 33 samples. The test results are summarized in Table 1.

	Table 1 – Moisture Content							
Sample	Depth (mbgs)	Moisture Content (%)	Sample	Depth (mbgs)	Moisture Content (%)	Sample	Depth (mbgs)	Moisture Content (%)
01-02	0.3-0.9	8.9	03-01	0.3-0.8	4.3	06-02	0.8-1.2	19.9
01-04	1.7-2.0	21.1	03-05	2.4-2.7	17.6	06-03	1.2-1.5	20.3
01-05	2.4-2.7	17.5	03-06	3.0-3.5	30.8	06-04	1.5-2.0	12.7
01-06	3.0-3.5	35.2	03-08	4.0-4.3	30.3	06-06	2.4-2.7	14.4
01-08	4.3-4.6	21.0	03-09	4.6-5.0	14.7	06-07	3.0-3.5	14.4
01-09	4.9-5.2	28.5	04-06	3.0-3.5	14.4	07-04	1.5-2.0	7
01-11	6.1-6.6	17.3	04-08	4.0-4.3	30.2	07-07	3.0-3.5	8.2
02-1A	0.8-1.2	23.3	04-10	4.6-5.0	26.0	07-09	4.3-4.6	4.2
02-03	1.5-2.0	27.4	05-01	0.3-0.6	19.7	07-10	4.6-5.0	7.9
02-05	2.4-2.7	20.1	05-02	1.1-1.4	17.9			
02-06	3.0-3.5	21.5	05-06	3.0-3.5	15.4			
			05-08	4.1-4.4	17.5			
			05-09	4.6-5.0	23.6			

3.4.2 PARTICLE GRADATION RESULTS (ASTM D422)

Particle size analysis was performed on seven soil samples to determine the materials gradational characteristics. Moisture content was also completed on the samples. The test results are summarized in Table 2.

	Table 2 – Particle Size Analysis						
Sample	Depth (mbgs)	Cobble (%)	Gravel (%)	Sand (%)	Silt (%)	Clay (%)	Moisture Content (%)
02-2A	0.8-1.2	0	3.7	21.1	46.3	28.9	24.6
02-08	4.3-4.6	0	3.2	22.8	47.2	15.8	28.3
03-04	1.5-2.0	0	0	43.5	48.2	8.3	18.2
04-03	1.5-2.0	0	2.6	41.3	34.8	21.8	15.2
05-03	1.5-2.0	0	4.8	34.3	37.4	23.5	17.4
07-02	0.8-1.2	0	0	54.1	31.8	14.1	4.8
07-06	2.6-2.9	0	0	21.8	59.2	19	8.5

3.4.3 ATTERBERG LIMITS TESTS (ASTM D4318)

Atterberg Limit tests were completed on seven soil samples to determine plastic and liquid limits. The test results are summarized in Table 3.

	Table 3 – Atterberg Limit Test Data						
Sample	Depth (mbgs)	Moisture Content (%)	Liquid Limit (%)	Plastic Limit (%)	Plasticity Index (%)		
02-09	4.9-5.2	31.5	38	21	17		
03-2B	0.6-1.2	8.0	27	21	6		
04-01	0.306	21.7	68	39	38		
04-02	0.9-1.4	14.1	66	29	37		
04-05	2.4-2.7	17.3	77	30	47		
05-04	1.7-2.0	13.3	47	24	23		

3.4.4 UNCONFINED COMPRESSION TEST (ASTM D2166)

An unconfined compression test was performed on the Shelby Tube Sample, from BH-04. The test results are presented in Table 4.

Table 4 – Unconfined Compression Test – Sample BH-04					
Sample		Test Results			
Diameter (cm)	6.00	Moisture Content (%)	23.4		
Height (cm)	14.53	UCS q _u (kPa)	145.03		
H/D Ratio	2.42	Shear Strength (kPa)	72.52		
Mass (g)	798.4	Axial Fal. Strain (%)	9.45		

3.5 GROUNDWATER CONDITIONS

Groundwater seepage and sloughing conditions were only observed in Borehole 2 during drilling. Groundwater levels were measured in the four boreholes with water levels measured at three different times. The recorded groundwater measurements are provided in Table 5 below.

	Table 5 – Groundwater Conditions					
Borehole/	Surface	D	epth to Groundwate	er (m)		
Piezometer	Elevation (m)	March 17, 2021	March 25, 2021	March 31, 2021		
BH-02	681.9	5.5	5.0	4.8		
BH-04	682.1	Dry	Dry	Dry		
BH-05	683.1	Dry	Dry	Dry		
BH-07	682.9	Dry	Dry	Dry		

As the boreholes drilled were close to the river, within 6 to 25 m of the top of bank, it is expected that the measured groundwater table is hydraulically connected to the Red Deer River. Groundwater

elevations are expected to fluctuate on a seasonal basis and will be highest after extended rainfall periods or snow melt. Based off the observations during drilling and from our review of previously performed geotechnical investigations in the area, the estimated static groundwater table elevation on the landside of the dike typically ranges from 677 m to 678 m. The groundwater elevation should generally be expected to fluctuate seasonally and with the level of the Red Deer River.

The piezometers installed in Boreholes 4 & 5 are to be utilized to perform field tests of the hydraulic conductivity of the existing dike fill material, with a slug test. These piezometers were installed by drilling to 5 m below the existing ground surface and then backfilling with bentonite to the bottom of the existing dike fill. A 1.5 m length of slotted PVC pipe was then installed with sand backfill extending above the slotted section of pipe for 0.15 m. A solid PVC pipe was then installed to surface, with a 1 m bentonite cap above the sand backfill. Hydraulic conductivity of the existing dike fill can then be tested in the field at these two locations. Given the placement of the two bentonite caps, these piezometers should not be influenced by the existing groundwater table and it was anticipated that they would remain dry.

A further discussion of hydraulic conductivity of the existing soils is presented in section 3.6 below.

3.6 SOIL PERMEABILITY CONDITIONS

The DRFM was to provide hydraulic conductivity of the existing and proposed dike fill materials, however as of the date of this report, this information has not been provided. As such, permeability of soils was examined empirically to estimate a range of hydraulic conductivity values for the existing dike fill and underlying fill materials. Given the variability observed in the existing dike fill materials, several different hydraulic conductivity equations were used to generate an estimate for hydraulic conductivity values. These equations use the grain sizes to estimate the saturated hydraulic conductivity of the fill material. The existing dike fill material was generalized as sandy silt with some clay. The results of this analysis are presented in the table below.

Table 6 – Hydraulic Conductivity of Existing Materials				
Material	Hydraulic Conductivity (m/s)			
Existing Dike Fill	6.0x10 ⁻⁸ to 1.4x10 ⁻⁵			
Underlying Fill Material	1.2x10 ⁻⁸ to 1x10 ⁻⁵			

Generally, results for the existing dike fill had saturated conductivity values around 2x10⁻⁶ m/s and only one model was an outlier with a far lower hydraulic conductivity. To confirm that the estimated hydraulic conductivity values calculated are within a reasonable range, these values were compared against typical hydraulic conductivity values (Heath, 1983) and were found to be within a reasonable range, as shown in Table 7 below.

Table 7 – Typical Hydraulic Conductivity (Heath, 1983)				
Material	Hydraulic Conductivity (m/s)			
Fine Sand	2x10 ⁻⁷ to 2x10 ⁻⁴			
Silt, loess	1x10 ⁻⁹ to 2x10 ⁻⁵			
Till	1x10 ⁻¹² to 2x10 ⁻⁶			
Clay	1x10 ⁻¹¹ to 4.7x10 ⁻⁹			

The piezometers installed within BH-O4 and BH-O5 were constructed to allow for in-situ hydraulic conductivity testing to be completed on the existing dike fill soils. At the time that this report was prepared, this in-situ testing was not conducted and may be completed once the final design alignment layout is available for the section of dike situated along Riverside Drive. The section of dike along Riverside Drive may require the side slopes of the dike to be steeper than 3H:1V and may be the critical design case to be assessed. Once the layout for this portion of the dike alignment has been finalized, in-situ hydraulic conductivity testing on the dike fill soils may be completed.

4. GEOTECHNICAL ASSESSMENT


This geotechnical assessment considers the existing dike fill soils and foundation soils in terms of strength, permeability, and density. Seepage/transmissivity and waterside slope stability of the dike were also assessed.

4.1 PREVIOUS FLOOD CONDITIONS AND DURATIONS

Drumheller has experienced at least 11 major flooding events on the Red Deer River since 1900. Recent flood events in 2005 and 2013 provide the only flood events with recorded flow rates and water levels throughout the event. In 2005 the flood waters peaked at a flow of approximately 1,450 m³/s while in 2013, flows peaked around 1,322 m³/s. Northwest Hydraulic Consultants (nhc) has modelled flooding on the Red Deer River and estimated that in a flood event of 1,100 m³/s, failure of the Dike D along Riverside Drive at Second Street would cause inundation of properties (nhc, 2020). During our modeling of the proposed dike and riverbank for transmissivity and slope stability, it was assumed that elevated water levels would be considered and flood conditions present, when flows are greater than 850 m³/s, which corresponds to an elevation of approximately 681 m at Borehole 6, which is approximately the base of our existing dike. In the 2005 and 2013 event, elevated water levels remained for approximately 2.5 days during both events.

nhc constructed a synthetic hydrograph with different flood events along the Red Deer River at the Town of Drumheller, including flows of 1,870 m³/s, 2,090 m³/s, and 3,050 m³/s. As seen in the annotated figure below, flood flow levels are estimated to remain elevated for approximately 3.4 days for a flow of 1,870 m³/s, approximately 3.5 days for a flow of 2,090 m³/s, and approximately 5 days for a flow of 3,050 m³/s. During modeling, SweetTech has assumed that flood flow levels remain elevated for 7 days to provide a conservative estimate for the risk of failure due to rapid drawdown and to allow for the transmissivity of the dike structure to be assessed. A summary of flood flows and elevated water level durations is provided in Table 8 and can be seen on nhc's hydrograph Figure 44.

Table 8 – Flood Flows and Elevated Water Level Duration				
Flood Event	Peak Flow (m ³ /s)	Days of Elevated Flood Duration (> 850 m³/s)		
2005	1,450	2-5		
2013	1,322	2-5		
Simulated Design Flood	1,870	3-4		
Simulated Design Flood	2,090	3-5		
Simulated Design Flood	3,050	5		

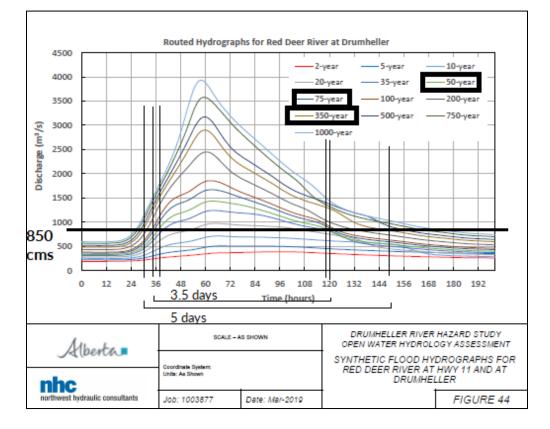

4.2 SOIL DESIGN PARAMETERS

The following material parameters were utilized throughout the seepage and slope stability assessment. During the assessment, cohesion of the soils was neglected.

Table 9 – Material Parameter Summary					
Material	Friction Angle (φ)	Bulk Unit Weight (γ)	Saturated Hydraulic Conductivity (Kx)		
New Dike Fill Soil	25°	18.5 kN/m ³	2x10 ⁻⁶ m/s		
Existing Dike Fill Soil	25°	18.5 kN/m ³	2x10 ⁻⁶ m/s		
Underlying Fill Soils	27°	18 kN/m ³	9x10 ⁻⁶ m/s		
Sand/Silt	27°	17.5 kN/m ³	9x10 ⁻⁶ m/s		
Sand and Gravel	36°	19.5 kN/m ³	5x10 ⁻⁵ m/s		

Through discussions with the DRFM and Parkland Geotechnical Consulting Ltd., SweetTech was informed to model, assess and design Dike D using a fill soil with a 25° friction angle. Upon drilling the existing dike, it has been estimated that the existing Dike D fill soil friction angle is predominantly ≥25°. Based off laboratory testing and observations made during drilling and test pitting, high plastic soils were only encountered within BH-04, indicating that most of Dike D was constructed using low to medium plastic materials. Once the proposed fill soil has been selected, direct shear testing, hydraulic conductivity, plasticity and dispersity (Crumb) testing is to be performed to confirm the material parameters. For Dike D construction, SweetTech recommends using a fill material with a friction angle $\geq 25^{\circ}$ and with a low to medium plasticity. If the materials friction angle is found to be below 25°, the slope stability assessment will need to be revisited to confirm that the safety factors are within the "Minimum Design Factors of Safety for DRFM Dikes" found within the Geotechnical Design Basis Memo for the DRFM System, issued April 21, 2021, by the DRFM. If a reassessment of the dikes slope stability is required due to the proposed fill materials parameters, it is recommended to complete this reassessment once the final dike alignment has been selected along Riverside Drive. The area along Riverside Drive currently has several design layout options including retaining walls and dike side slopes steeper than 2.5H:1V, and depending on the option selected, additional geotechnical engineering assessment and design details may be required for this dike section.

4.3 SEEPAGE AND PIPING

Seepage through the existing dike was considered using the estimated hydraulic conductivity values for soils with a predicted flood event duration described in Section 4.1. The seepage analysis was performed at one critical section using finite element methods and was performed utilizing SEEP/W software (Geo-Slope, 2021). In a flow event of $1,870 \text{ m}^3$ /s, the flood duration is estimated to be approximately 3.5 days. To allow for some conservativism in the modeling of the seepage conditions, a flood duration of 7 days was utilized, with design flows being maintained for 1.5 days. The flood condition was defined as being a flow rate of 850 m^3 /s to 1850 m^3 /s. Using a hydraulic conductivity of $2x10^{-6}$ m/s for the existing and new dike fill soils, with the specified 7-day flood duration, it was determined that seepage of the flood waters through the typical dike section will not be a significant risk along the understood Dike D alignment. It should be noted that the existing dike material was found to be constructed of moderately variable fill soils and that a range hydraulic conductivity was assessed for the existing and proposed dike fill soils.

Utilizing the estimated hydraulic conductivities of the underlying fill and native soils beneath the subject dike and extending the flood event for a 7-day duration, piping and seepage from under the dike structure was also determined to not occur at the assessed critical section. The groundwater table was found to extend to within 0.5 m from surface on the landside of the dike but did not extend to the ground surface. As the underlying soils are anticipated to have a highly variable fine grained sand content, there is the possibility that piping under the dike will occur where the underlying soils contain a greater than a 50% sand and gravel fraction and higher hydraulic conductivities are present. Additionally, during a flood event, stormwater collecting and runoff from the land side could impact the assumed conditions on the landside of the dike.

Based on the results from the field investigation, laboratory testing, and SweetTech's analysis, transmissivity of the flood waters through the dike should not be a concern unless the defined flood condition (850 m³/s to 1850 m³/s) is extended for longer than a 7 day period. Based on the hydrographs from nhc and available historical flood information, these prolonged conditions are not anticipated to occur.

To reduce the risks of under dike seepage, cut-off trenches and sheet-piling have been evaluated by the DRFM and it is understood that these approaches are not currently being considered and that an assessment of these methodologies was not to be performed.

It is to be understood that the provided fill soils for the construction of Dike D must have a maximum hydraulic conductivity of $4x10^{-6}$ m/s as transmissivity of the flood water through and beneath the dike will become a concern when the dike fill soils have a hydraulic conductivity greater than $8x10^{-6}$ m/s. As such, soils containing a high sand and gravel fraction and relatively high hydraulic conductivity will not be a suitable dike fill material.

Additional seepage analysis will be required during detailed design if a retention system is utilized along Riverside Drive.

4.4 SLOPE STABILITY

SweetTech performed a slope stability analysis at the critical section specified on Figure 1 (Station D 0+687). Slope/W geotechnical software (GEOSLOPE, 2021) was utilized to perform the slope stability assessment. The Morgenstern-Price, limit equilibrium method was utilized, and produced circular failure surfaces along the assessed critical section. The circular failure surface was prevented from developing at a depth shallower than 0.8 m below grade as these small failures are difficult to assess due to the variable riverbank topography and can be easily repaired if they happen to occur under rapid drawdown conditions.

The existing dikes constructed with local borrow materials around Drumheller have been constructed to slopes varying from 3H:1V to 2H:1V with varying performance. Steeper slopes in the 2H:1V range have been observed to have surficial cracking (Dike B), while the existing Dike D has only been observed to have longitudinal cracking on the asphalt surface. This cracking of the asphalt surface is attributed to either the condition of the asphalt at the time of placement, volumetric changes from the medium to high plastic soils situated beneath the pathway and possible vehicle traffic loads on the pathway that were beyond the design load and the underlying soils bearing capacity. Some consolidation and fill settlement may have also contributed to the noted damage on the asphalt path but upon reviewing the construction sequence timing of the existing dike, most of this settlement is anticipated to have occurred before the pathway was constructed.

The stability assessment was performed utilizing a dike with 3H:1V side slopes and a 6 m wide dike crest. Cohesion was neglected in the assessment, surcharge loads were not modeled and the flood condition time period was maintained at a total of 7 days. As the worst-case condition for stability of the riverbank and dike is under rapid drawdown conditions, the initial and peak flood condition

were maintained for 6 days and then the flood waters were rapidly drawn down over a period of 1 day. This allows for some conservatism in the assessment as the nhc hydrographs show a longer drawdown period during flood events.

Table 10 – Summary of 3H:1V Dike Sideslope Stability				
Model Scenario	Factor of Safety of Entire Escarpment			
After 1.5 Days at Flood Peak	2.30			
Rapid Drawdown (Midway)	1.34			
Rapid Drawdown (End)	1.92			
Approximate Steady State	2.56			

Based on the performed stability assessment, it was determined that the 3H:1V dike surface was at or slightly above a factor of safety of 1.3 under rapid drawdown conditions. Along much of the alignment of Dike D, the lower portion of the riverbank has become over steepened to a near vertical condition from river flow erosion (in high flow events). This over steepened toe area along the edge of the river was found to typically range from 0.8 m to 2 m in grade change. These over steepened toe conditions were found to impact the resulting safety factors and generally resulted in safety factors under 1.1 when rapid drawdown occurs at the toe of the riverbank. These toe stability safety factors are summarized below on Table 11.

Table 11 – Toe of River Valley Slope Stability				
Model Scenario	Factor of Safety			
After 1.5 Days at Flood Peak	1.28			
Rapid Drawdown (Midway)	1.19			
Rapid Drawdown (End)	1.02			
Approximate Steady State	1.45			

To avoid these lower safety factors, undercutting of the proposed dike and to avoid further over steepening along the toe of the river valley wall, it is generally recommended to grade and protect the toe of the riverbank utilizing a competent rip-rap material. Where the dike is built within 3 m of the crest of the riverbank, the over steepened bank is to be graded to a 2H:1V and is to be protected with a 1 to 2 m thick layer of keyed-in rip-rap along the toe of the riverbank. This was found to increase the drawdown safety factor to approximately 1.2. This rip-rap placement will allow for the safety factor to increase to above 1.1 under rapid drawdown, as per the "Minimum Design Factors of Safety for DRFM Dikes" found within the Geotechnical Design Basis Memo for the DRFM System. Where the typical dike section is constructed above the riverbank and within 3 m of the crest, The Town of Drumheller could accept the risks of a drawdown induced instability along the toe of the dike and perform critical repairs after a flood event. As the typical dike is not likely with this wider dike section as long as failures are addressed rapidly. Where the typical section is not achieved and is built within 3 m of the crest, keyed-in rip-rap will be required to attain the "Minimum Design Factors of Safety for DRFM Dikes".

Table 12 – Graded and Armored	d Toe of River Valley Slope Stability
Model Scenario	Factor of Safety
After 1.5 Days at Flood Peak	1.54
Rapid Drawdown (Midway)	1.34
Rapid Drawdown (End)	1.20
Approximate Steady State	1.46

It is to be understood that the stability assessment performed for Dike D utilized estimated new dike fill material parameters of 18.5 kN/m³ for the bulk unit weight, $2x10^{-6}$ m/s for saturated hydraulic conductivity and a 25° friction angle. The assessment performed assumed that the dike embankment construction materials consist of a low to medium plasticity, nondispersive clay. If the provided materials friction angle is found to be below 25°, the slope stability assessment will need to be revisited to confirm that the safety factors are within the "Minimum Design Factors of Safety for DRFM Dikes".

4.5 SEISMIC STABILITY

The seismic hazard of the Drumheller area is anticipated as low by the Geological Survey of Canada. Due to the low-risk susceptibility of seismic instability of the dike, the risk of soil liquefaction is low and no further assessment or consideration for seismic stability was considered in this analysis.

4.6 FOUNDATION BEARING CAPACITY AND SETTLEMENT

The two types of settlement that are typically assessed include immediate and consolidation settlement. It is assumed that immediate settlement would occur during construction as the loads from the construction equipment and fill occur. Consolidation settlements would occur over a longer period as the underlying soils respond to the fill soil placement loads.

The geotechnical investigation confirmed that along the entire Dike D alignment, previously placed fill soils will be situated below the dike structure. Some of these fill soils were found to be placed in an uncontrolled manner with no compaction testing performed. This can be seen from the range of N values attained from Standard Penetration Testing. In addition, the silt and sand layer as well as the localized clay partings encountered beneath the underlying fill soils were found to have a highly variable in-situ consistency and undrained shear strength. The material was generally found to be in a loose condition along the north half of the dike alignment and improved to be in a compact condition for the southern half of the dike. These variable in-situ strength parameters will result in varying degrees of consolidation settlement upon placement and construction of the new dike structure. Settlement of the dike is expected to be primarily caused by compression of the foundation soils, with some settlement of the newly placed fill soils. It should be expected that settlement of new or replaced fill will occur due to "self-weight", particularly where thick fills are placed. For clay fill compacted to 98 percent of the Standard Proctor maximum dry density, the fill settlement is expected to be in the range of 0.5 to 1 percent of the fill height, with most of the settlement occurring during the first freeze thaw cycle.

Along the north half of the proposed dike, consolidation settlement is anticipated to be on the order of approximately 90 mm in the first year with additional settlement of less than 20 mm predicted over the next 10 years. As the underlying fill soils in this area were found to have a highly variable in-situ consistency, differential settlements along the dike alignment from the Aquaplex building to the Badlands Community Facility may be observed within the first year after construction. Along the south portion of the alignment (approx. D0+600 to D1+080), conditions were found to improve slightly and settlements are anticipated to be approximately 75 mm in the first year with additional settlement of less than 20 mm predicted over the next 10 years. Where proposed fills are greater than 2.5 m and where bearing soils encountered are less than those found during the field investigation, settlement magnitudes may exceed the estimates provided above.

From approximately dike station D 1+080 to D 1+195, the topography drops down to a lower elevation along the dike alignment and approximately 4 m of fill is anticipated to be required in this area to complete the dike construction. At the time of the field investigation, this lower area was not accessible to the drilling equipment due to the varying of the topography and the density of the treed area. Upon completion the tree and vegetation clearing in this area, two test pits were excavated and tested for consistency to a depth of 2 m below the current grade elevation. It was determined that this area has a minimum ultimate bearing capacity of 240 kPa. Based off the performed test pit bearing capacity assessment and the results from BH-01, settlement of this area is not anticipated to be a concern for general dike stability. From the two test pits performed in this area, it should be anticipated that approximately 0.75 to 1.0 m of surficial soils will need to be stripped prior to fill placement. This stripping has been accounted for within the 4 m fill thickness estimate. At a minimum, this area is to have the organics and unsuitable surface stripped, and the subgrade is to be scarified to a depth of 200 mm and re-compacted to at least 98% SPMDD. As fill soils in this area are anticipated to be approximately 4 m in thickness, settlements are anticipated to be approximately 80 mm in the first year with additional settlement of less than 20 mm predicted over the next 10 years.

If placement of an asphalt pathway on top of the dike is desired, it is recommended that asphalt placement occur after the dike goes through two freeze and thaw cycles (2 winters) to reduce the risk that settling of the dike causes damage and failure to the asphalt pathway. Alternatively, the pathway surface could be graveled for this initial time period, or a base course of asphalt could be placed with a final asphalt layer placed after two freeze thaw cycles has occurred. High plastic clay fill soils should be avoided beneath the pathway to minimize the risks associated with shrinkage and swelling related movements. Additional measures to ensure that precipitation easily sheds off of the dike materials (and does not get trapped under the pathway) is important to minimize risks of swelling and/or shrinking of the dike fills.

4.7 STRUCTURES IN AND THROUGH DIKE

There are currently electrical utilities, and stormwater outfalls that pass under the existing dike. It is understood that electrical utilities in all areas except by the Gordon Taylor Bridge are planned to remain in place. There are 5 known stormwater cross-drains that extend under the existing/proposed dike alignment. Three of the stormwater cross-drains were found to extend and

daylight at or near the rivers typical surface elevation and are out of the anticipated dike footprint. Based off the observations from the time of the field investigation, the remaining two stormwater cross-drains may need to be extended to allow for dike construction. One of the stormwater crossdrains is situated at the west corner of the Drumheller Aquaplex and the other stormwater crossdrain is situated at the southern extent of Dike D, near dike station D 1+174. As the condition of the riverbank is near vertical and heavily eroding for much of the alignment, it is generally recommended to armor the toe of the slope with rip-rap, and this may dictate that additional stormwater outfalls may require extension and or improvements.

4.8 PROPOSED DIKE FILL SOIL REQUIREMENTS

During the slope stability and seepage assessment, it was determined that transmissivity of flood water through the dike would generally not be a concern assuming that the provided fill soils are very similar to the existing dike fill soil and flood durations do not extend beyond a 7-day period. During our assessment it was determined that transmissivity of the flood water through and beneath the typical dike section would be a concern if the fill soils were of a hydraulic conductivity of $8x10^{-6}$ m/s or greater. Based off these findings, SweetTech strongly recommends that the fill material being provided has a maximum hydraulic conductivity of $\leq 4x10^{-6}$ m/s.

The slope stability assessment assumed that the proposed dike fill soils would have material parameters of 18.5 kN/m³ for the bulk unit weight, $2x10^{-6}$ m/s for saturated hydraulic conductivity and a 25° friction angle. The assessment performed assumed that the dike embankment construction materials consist of a low to medium plasticity, nondispersive clay. Once the proposed fill soil has been selected, laboratory testing is to be performed to confirm the materials friction angle, saturated hydraulic conductivity, plasticity, compacted unit weight and dispersivity. SweetTech recommends using a material with a friction angle $\geq 25^\circ$ and with a low to medium plasticity. If the materials friction angle is found to be below 25°, the slope stability assessment will need to be revisited to confirm that the safety factors are within the "Minimum Design Factors of Safety for DRFM Dikes". If some dispersive clays are proposed to be utilized, SweetTech can provide recommendations regarding blending of this material, where to use the material within the dike section and techniques that can be employed to significantly reduce the potential risks of internal and external erosion due to dispersive soils (e.g., non-dispersive clay soil cover, vegetation and geotextile utilization).

4.9 RETAINING WALL RECOMMENDATIONS

The local fill material utilized to construct the existing dikes is not suitable or sufficient for construction of retaining walls in the areas identified in Figure 1. These areas will require material with a tighter tolerance for their hydraulic conductivity and a higher residual friction angle. The minimum friction angle (ϕ) for this material is $\phi \ge 28^{\circ}$ and the maximum hydraulic conductivity for this material is $2x10^{-6}$ m/s. A reworked clay till fill would be ideal for the construction of the retaining wall backfill areas. It is generally recommended to construct the retaining walls utilizing Mechanically Stabilized Earth (MSE) construction methods and materials. Most facing units are anticipated to be adequate for the height of wall anticipated, although the emergency response loading condition may require the use of a larger retaining wall block product. Large block facing units generally can

accommodate higher live loads and loading conditions situated closer to the back of the retaining wall block. As it is understood that we are to exercise consideration for adaptive emergency response management allowing for an emergency dike raise to manage flows of 2,100 m³/s and greater, it is anticipated that large trucks transporting fill soils would be traveling on the surface of the dike during a flood event. Large retention blocks should allow for these emergency response live loads to be situated relatively close to the back of the wall with minimal displacement to the facing units. When surficial live loads are situated behind a smaller block retaining wall, pull-out of the upper geogrid layers can occur, and subsequent failure or displacement of the wall system.

5. DISCUSSION

Based on the findings of this geotechnical assessment, it is SweetTech's opinion that the proposed Dike D embankments evaluated generally meet the slope stability, seepage, and settlement requirements. Near the river elevation, lower toe stability safety factors were observed and where the typical dike section is constructed above the riverbank and within 3 m of the crest, these lower safety factors should be addressed. If the toe of the riverbank is graded and is adequately armored with rip-rap, safety factors along the toe of the riverbank could be raised to above 1.1 under rapid drawdown conditions, as per the "Minimum Design Factors of Safety for DRFM Dikes". Once the DRFM has selected the fill material for the construction of Dike D, SweetTech may need to reevaluate the geotechnical aspects of this project if the material parameters do not meet the requirements outlined within this report.

SweetTech based this report upon the project and documents as described and the information obtained from the exploratory borings and test pits performed during the geotechnical field investigation. The findings and recommendations in this report were based upon data obtained from a limited number of borings, test pits, laboratory testing, observations and information from reports performed by others. Differing geotechnical or geological conditions can occur within small distances and the information attained during our investigation was specific to each location explored. The explored locations may not completely define the subsurface conditions throughout the dike alignment. SweetTech may re-evaluate the conclusions and recommendations presented in this report if the Town of Drumheller or its representatives finds geotechnical conditions that differ from those described herein. This report was prepared only for use by those parties named or described within this report.

6. CLOSURE

We trust this geotechnical report meets your present requirements. This report incorporates and is subject to our attached conditions and limitations. Should you have questions or concerns, or require any additional information, please do not hesitate to contact our office at 587-329-6655.

SweetTech Engineering Consultants

APEGA Permit to Practice #P13638

Prepared by:

Scott Sutherland, E.I.T. Civil Engineer-in-Training

Reviewed By:

4- nt.

Eric Sweet, M.Eng., P.Eng. Principal Engineer

1963401 Alberta Ltd. o/a								
SweetTech Engineering Consultants								
APEGA Permit Number: P13638								
Name: Eric Sweet								
Signature: <u>kint</u>								
Date: September 17, 2021								



Andres Ocejo, P.Eng. Senior Geotechnical Engineer

7. REFERENCES

Drumheller Resiliency and Flood Mitigation Office. April 2021. Geotechnical Design Basis Memo for DRFM System (DRAFT). Provided by Drumheller Resiliency and Flood Mitigation Office. Accessed April 21, 2021.

EBA Engineering Consultants Ltd. November 1987. Drumheller Dike D Phase 1 Compaction Testing – Dike Construction. Provided by Drumheller Resiliency and Flood Mitigation Office. Accessed: March 30, 2021.

Geoslope International Ltd. 2021. SeepW & SlopeW [Computer software].

nhc. April 2020. Hydraulic Modelling and Flood Inundation Mapping Report. Provided by Drumheller Resiliency and Flood Mitigation Office. Accessed: April 1, 2021.

Palm Engineering Ltd. February 1999. Landale Development Corporation – Dinosaur Motel Property Soils Report. Provided by Drumheller Resiliency and Flood Mitigation Office. Accessed March 29, 2021.

Parkland Geotechnical Consulting Ltd. October 2014. Geotechnical Investigation - Proposed Hotel and Restaurant Development Lot 2, Block 34, Plan 991 1179, Drumheller Alberta. Provided by Drumheller Resiliency and Flood Mitigation Office. Accessed March 29, 2021.

Thurber Engineering Ltd. December 2016. Drumheller Community Facility Geotechnical Investigation. Provided by Drumheller Resiliency and Flood Mitigation Office. Accessed March 29, 2021.



This report incorporates and is subject to these conditions.

1.0 USE OF REPORT AND OWNERSHIP

This geotechnical report pertains to a specific site, a specific development, and a specific scope of work. It is not applicable to any other sites nor should it be relied upon for types of development other than that to which it refers. Any variation from the site or development would necessitate a supplementary geotechnical assessment.

This report and the recommendations contained in it are intended for the sole use of 1963401 Alberta Ltd. o/a SweetTech Engineering Consultants (SweetTech) Client. SweetTech does not accept any responsibility for the accuracy of any of the data, the analyses or the recommendations contained or referenced in the report when the report is used or relied upon by any party other than SweetTech's Client unless otherwise authorized in writing by SweetTech. Any unauthorized use of this report is at the sole risk of the user.

This report is subject to copyright and shall not be reproduced either wholly or in part without the prior, written permission of SweetTech. Additional copies of the report, if required, may be obtained upon request.

2.0 ALTERNATE REPORT FORMAT

Where SweetTech submits both electronic file and hard copy versions of reports, drawings and other project-related documents and deliverables (collectively termed SweetTech's instruments of professional service); only the signed and/or sealed versions shall be considered final and legally binding. The original signed and/or sealed version archived by SweetTech shall be deemed to be the original for the Project.

Both electronic file and hard copy versions of SweetTech's instruments of professional service shall not, under any circumstances, no matter who owns or uses them, be altered by any party except SweetTech. SweetTech's instruments of professional service will be used only and exactly as submitted by SweetTech.

Electronic files submitted by SweetTech have been prepared and submitted using specific software and hardware systems. SweetTech makes no representation about the compatibility of these files with the Client's current of future software or hardware systems.

3.0 ENVIRONMENTAL AND REGULATORY ISSUES

Unless stipulated in the report, SweetTech has not been retained to investigate, address or consider and has not investigated, addressed or considered any environmental or regulatory issues associated with development on the subject side.

4.0 NATURE AND EXACTNESS OF SOIL AND ROCK DESCRIPTIONS

Classification and identification of soils and rocks are based upon commonly accepted systems and methods employed in professional geotechnical practice. This report contains descriptions of the systems and methods used. Where deviations from the system or method prevail, they are specifically mentioned.

Classification and identification of geological units are judgmental in nature as to both type and condition. SweetTech does not warrant conditions represented herein as exact, but infers accuracy only to the extent that is common practice.

Where subsurface conditions encountered during development are different from those described in this report, qualified geotechnical personnel should revisit the site and review recommendations in light of the actual conditions encountered.

5.0 LOGS OF TESTHOLES

The testhole logs are a compilation of conditions and classification of soils and rocks are obtained from field observations and laboratory testing of selected samples. Soil and rock zones have been interpreted. Change from one geological zone to the other, indicated on the logs as a distinct line, can be, in fact, transitional. The extent of transition is interpretive. Any circumstance which requires precise definition of soil or rock zone transition elevations may require further investigation and review.

6.0 STRATIGRAPHIC AND GEOLOGICAL INFORMATION

The stratigraphic and geological information indicated on drawings contained in this report are inferred from logs of testholes and/or soil/rock exposures. Stratigraphy is known only at the locations of the testhole or exposure. Actual geology and stratigraphy between testholes and/or exposures may vary from that shown on these drawings. Natural variations in geological conditions are inherent and are a function of the historic environment. SweetTech does not represent the conditions illustrated as exact but recognizes that variations exist. Where knowledge of more precise locations of geological units is necessary, additional investigation and review may be necessary.

7.0 PROTECTION OF EXPOSED GROUND

Excavation and construction operations expose geological materials to climatic elements (freeze/thaw, wet/dry) and/or mechanical disturbance which can cause sever deterioration. Unless otherwise specifically indicated in this report, the walls and floors of excavations must be protected from the elements, particularly moisture, desiccation, frost action and construction traffic.

8.0 SUPPORT OF ADJACENT GROUND AND STRUCTURES

Unless otherwise specifically advised, support of ground and structures adjacent to the anticipated construction and preservation of adjacent ground and structures from the adverse impact of construction activity is required.

9.0 INFLUENCE OF CONSTRUCTION ACTIVITY

There is a direct correlation between construction activity and structural performance of adjacent buildings, ground, and other installations. The influence of all anticipated construction activities should be considered by the contractor, owner, architect, and prime engineer in consultation with a geotechnical engineer when the final design and construction techniques are known.

10.0 OBSERVATIONS DURING CONSTRUCTION

Because of the nature of geological deposits, the judgmental nature of geotechnical engineering, as well as the potential of adverse circumstances arising from construction activity, observations during site preparation, excavation and construction should be carried out by a geotechnical engineer. These observations may then serve as the basis for confirmation and/or alteration of geotechnical recommendations or design guidelines presented herein.



11.0 DRAINAGE SYSTEMS

Where temporary or permanent drainage systems are installed within or around a structure, the systems which will be installed must protect the structure from loss of ground due to internal erosion and must be designed so as to assure continued performance of the drains. Specific design detail of such systems should be developed or reviewed by the geotechnical engineer. Unless otherwise specified, it is a condition of this report that effective temporary and permanent drainage systems are required and that they must be considered in relation to project purpose and function.

12.0 BEARING CAPACITY

Design bearing capacities, loads and allowable stresses quoted in this report relate to a specific soil or rock type and condition. Construction activity and environmental circumstances can materially change the condition of soil or rock. The elevation at which a soil or rock type occurs is variable. It is a requirement of this report that structural elements be founded in and/or upon geological materials of the type and in the condition assumed. Sufficient observations should be made by qualifies geotechnical personnel during construction to assure that the soil and/or rock conditions assumed in this report in fact exist at the site.


13.0 INFORMATION PROVIDED TO SWEETTECH BY OTHERS

During the performance of the work and the preparation of the report, SweetTech may rely on information provided by persons other than the Client. While SweetTech endeavors to verify the accuracy of such information when instructed to do so by the Client, SweetTech accepts no responsibility for the accuracy or the reliability of such information which may affect the report.




DRFM DIKE D – GEOTECHNICAL INVESTIGATION REPORT

Appendix 1: Borehole Location Plan

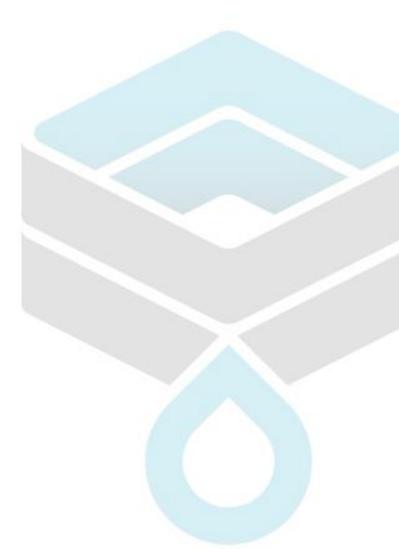



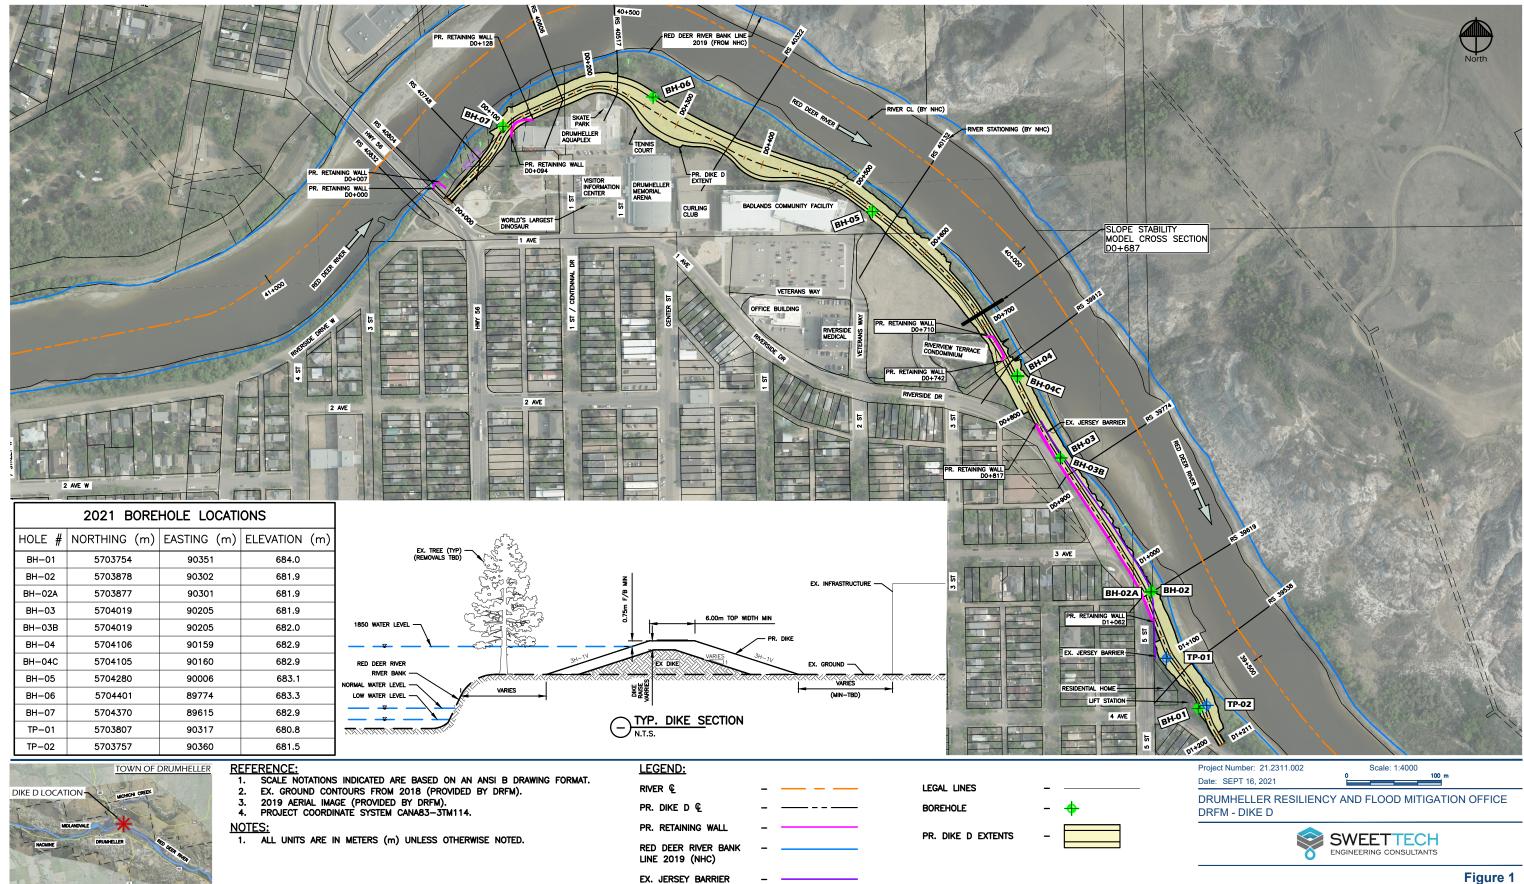


BOREHOLE LOCATION PLAN



DRFM DIKE D – GEOTECHNICAL INVESTIGATION REPORT

Appendix 2: Borehole Logs

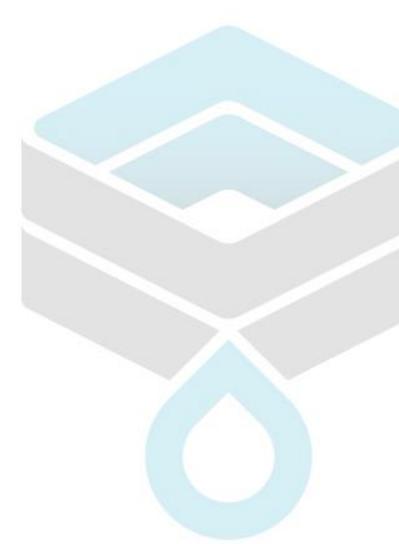

			В	ORII	NGN	NUMBER B PAGE	
PROJECT NUMBER 21.2311.002 DATE STARTED _3/17/21	PROJECT NAME Drumheller Dike D - Geotechnical Investigation PROJECT LOCATION Drumheller, AB GROUND ELEVATION 684 m HOLE SIZE 152 mm LOGGED BY T. Schaepsmeyer GROUND WATER LEVEL: AFTER DRILLING						
(E) HLd II C II	SO DESCRI		SAMPLE TYPE NUMBER	SPT (N VALUE)	STANDPIPE WELL	OTHER TESTS COMMENTS	ELEVATION (m)
	(SM) SAND & SILT (FILL), loose/firm, poorly graded, li (orange/red) noted, damp from 1.8m, silt content inc brown, moist from 2.4m, some gravel, t (ML) SILT (FILL), sandy (fir some clay, firm, low plastici pottery (orange/red), moist from 3.7m, medium plasti	ght brown, trace pottery creased, trace clay, dark trace - no clay, loose/firm le grained/poorly graded), ty, light brown, trace	M GB 01-01 GB 01-02 GB 01-02 SPT 01-03 GB 01-04 SPT M GB 01-04 M GB 01-05 SPT 01-06 GB 01-07 SPT M GB 01-07	2-3-4 (7) 3-3-2 (5) 3-3-5		Fill soils have varying degrees of compaction in this area. Adjacent ground surface elevation ~683m.	684 - - - - - - - - - - - - - - - - - - -
	(ML) SILT, sandy (fine grain clay, hard, low plasticity, bro		SPT GB 01-09 GB 01-10 SPT 01-11	(8) 13-16- 16 (32)			- 679 - - - - 678 -
	End of borehole at 6.60 m. Hole was backfilled with cur 0.9m of bentonite. No seepage observed while Dry at completion.						- - - 677 -

						В	ORI	NG N	IUMBER B PAGE	1 OF 1
CLIENT	Drumheller Resilie	ency and Flo	od M	itigation Office (DRFM)				otechnic	al Investigation	
	CT NUMBER21.23				PROJECT LOCATION					
	TARTED <u>3/17/21</u>			PLETED <u>3/17/21</u> g Inc.	-				ZE <u>152 mm</u> D BY A. Ocejo	
	NG METHOD Solid				GROUND WATER LEVE		_ `	, NEORE		
	Riverside Drive (R)	⊥ 14Days AFTER DRI	LLING <u>4.7</u>	5 m / El	ev 677.1	15 m	
Ê.	▲ SPT N Value ▲ 10 20 30			SOI	1	ЧРЕ	IE)	WEL		(m) N
DEPTH (m)						LE T MBE	SPT (N VALUE)	PIPE	OTHER TESTS COMMENTS	ATIO
	20 40 60	SOIL S		DESCRI	JION	SAMPLE TYPE NUMBER	ž	STANDPIPE WELL		ELEVATION (m)
				(ML) SILT (FILL), sandy (fine trace to some clay, trace gra plastic, brown, random clay s pottery (orange/red) noted, d	vel, soft to firm, medium shale nodules & trace	₩ GB 02-01			Fill soils have varying degrees of compaction in this area. Adjacent	-
		· <u></u>							ground surface elevation ~681m.	681
				at 1.5m clay seam encount	ered (0.3m thick)	₩ GB 02-01				-
	A O	·		from 1.8m to 2.4m, firm, m	ottled orange and brown	SPT 02-03	1-1-3 (4)			-
				from 2.4m, increasing sand	fraction stiff low	Mn GB 02-04 Mn GB				-
	•			plasticity, light brown, damp		02-05				-
3 	•	- <u></u>				SPT 02-06	3-5-7 (12)			679 - -
 				(ML) SILT (FILL), sandy (fine trace to some clay, trace gra dark brown, moist	e grained/poorly graded), vel, firm, low plastic,	₩ GB 02-07				- 678
	•			from 4.3m, firm to stiff, me	dium plasticity	₩ GB 02-08			Gravel = 3.2% Sand = 33.8% Silt = 47.2%	-
	A		Ţ			<u>SPT</u> GB	3-3-5 (8)		Clay = 15.8%	677
	1-01		 	(SM) SAND, fine grained, sil gravel, loose, poorly graded, pottery (orange/red) noted, s	dark brown/black, trace	<u>02-09</u> /			PL = 21%	-
6			·							676
				End of borehole at 6.10 m. Slough at 5.5m. 50mm PVC standpipe install 3.0m slotted pipe. Backfilled with 4.6m of cuttin bentonite, followed by 0.3m of Water at 5.5m at completion	gs, followed by 0.6m of of sand to surface.					-

	SWEET ENGINEERING C				BC	BORING NUMBER BH-02A PAGE 1 OF 1						
CLIEN	✓	<u>d Flo</u> od	d Mitigation Office (DRFM)	PROJECT NAME _Drum	nheller Dike D - Geotechnical Investigation							
PROJ	ECT NUMBER			PROJECT LOCATION								
DATE	STARTED 3/17/21	C	OMPLETED _ 3/17/21	GROUND ELEVATION	681.9 m	H	IOLE SI	ZE 152 mm				
DRILL		vice Dr	illing Inc.	LOGGED BY T. Schae	psmeyer		HECKE	D BY A. Ocejo				
DRILL	ING METHOD Solid Stem A	uger		GROUND WATER LEVE	L:							
NOTE	S _ Riverside Drive (River Sid	le of Di	ike)	AFTER DRILLING								
DEPTH (m)	▲ SPT N Value ▲ 10 20 30 40 PL MC LL 20 40 60 80	SOIL SYMBOL	SOI DESCRII		SAMPLE TYPE NUMBER	SPT (N VALUE)	STANDPIPE WELL	OTHER TESTS COMMENTS	ELEVATION (m)			
			(ML) SILT (FILL), sandy (fine trace to some clay, trace gra plastic, brown, trace pottery damp	vel. soft to firm. medium				Fill soils have varying degrees of compaction in this area. Adjacent ground surface elevation ~681m.	-			
					₩, GB 02A-01				- - -			
 - 1.0 					SPT 02A-02	10-8-6 (14)		Gravel = 3.7% Sand = 21.1% Silt = 46.3% Clay = 28.9%	- 			
1.5 1.5			End of borehole at 1.20 m. Hole was backfilled with cutt No seepage observed while Dry at completion.	ings. drilling.					- - 680.5 -			
									- - - 680.0			
									- - - 679.5			
5 2.5												

	SWEE ENGINEERING					UKII	i Ur	NUMBER B PAGE	
			Mitigation Office (DRFM)				otechni	cal Investigation	
	CT NUMBER _ 21.2311.0							75 450	
	TARTED <u>3/17/21</u>		OMPLETED <u>3/17/21</u> illing Inc.					ED BY <u>A. Ocejo</u>	
	NG METHOD Solid Ster					_ 0			
			e Drive)						
_	▲ SPT N Value ▲	Ы			Ш		/ELL		(m)
-	<u>10 20 30 40</u> PL M <u>C</u> LL	SYMBOL	SO	IL	E TY	PT NLUE	ЪЕ	OTHER TESTS	NOL
	20 40 60 80	SOIL S'	DESCRI	PTION	SAMPLE TYPE NUMBER	SPT (N VALUE)	STANDPIPE WELL	COMMENTS	ELEVATION (m)
-			(ML-SM) SILT & SAND (FI some clay, trace gravel, ve dense (well compacted fill)	ry stiff to hard/compact to				Fill soils have varying degrees of	-
-			graded, light brown, randor noted, damp	m clay shale nodules				compaction in this area.	Γ
-	•		, L		™ GB 03-01			Adjacent ground surface	
-								elevation ~681m.	
- -					SPT 03-02	9-43-25 (68)		SPT bouncing on rock.	68
-			from 1.2m, soft to firm/loo	ose (poorly compacted fill)	GB	(- <i>-</i> /			F
-					03-03			$C_{roucl} = 2.00/$	F
1					SPT	3-1-3		Gravel = 3.2% Sand = 43.5% Silt = 48.2%	Ļ
1					03-04	(4)		Clay = 8.3%	68
									+ 00
									╞
]	•		from 2.4m, damp		m GB				╞
					03-05				╞
									67
	•				SPT	2-2-3			F
4	•		from 3.3m, firm		03-06	(5)			F
			at 3.4m, clay seam (0.3m	i thick)	₩ GB 03-07				f
+			(ML-SM) SILT & SAND, fin clay, trace gravel, very stiff	e grained, trace to some					F
			poorly graded, dark brown, noted, damp	random oxidized pockets					67
-			,t.		₩ GB 03-08				
-	•								
+	•		from 4.6m, coal/carbonad	ceous inclusion noted, wet	SPT	11-11-8		Anticipated groundwater	L
-					03-09	(19)		table at 4.5m.	L_
			End of borehole at 5.00 m.		-				67
+			Hole was backfilled with cu 0.9m of bentonite.						F
1			No seepage observed whil Dry at completion.	e aniiing.					F
1									\vdash
-									1

					BC	DRIN	g nl	JMBER BH PAGE	-03B	
CLIEN	IT Drumheller Resiliencv an	d Flood	d Mitigation Office (DRFM)	PROJECT NAME Drum	heller Dike	e D - Ge	otechnio	cal Investigation		
	ECT NUMBER	PROJECT LOCATION								
DATE	STARTED _ 3/17/21	C	OMPLETED _ 3/17/21	GROUND ELEVATION	682 m	н	IOLE SI	ZE 152 mm		
DRILL	ING CONTRACTOR All Ser		illing Inc.					D BY <u>A. Ocejo</u>		
DRILL	ING METHOD Solid Stem A	uger		GROUND WATER LEVE	L:					
NOTE	S _ Riverside Drive (Beside F	Riversid	le Drive)	AFTER DRILLING						
DEPTH (m)	▲ SPT N Value ▲ 10 20 30 40 PL MC LL 20 40 60 80	SOIL SYMBOL	SOI DESCRI		SAMPLE TYPE NUMBER	SPT (N VALUE)	STANDPIPE WELL	OTHER TESTS COMMENTS	ELEVATION (m)	
			(ML-SM) SILT & SAND (FIL some clay, trace gravel, very dense, low plastic, poorly gr random clay shale nodules r	y stiff to hard/compact to aded, light brown,		-		Fill soils have varying degrees of compaction in this area. Adjacent ground surface elevation ~681m.	682.0 - - -	
0.5					₩ GB 03B-01	-			- - -	
 1.0								LL = 27% PL = 21%	-	
	• H >>4				SPT 03B-02	13-33- 35 (68)			- - -	
<u>1.5</u>			End of borehole at 1.40 m. Hole was backfilled with 0.9 by cuttings to surface. No seepage observed while Dry at completion.						- - - -	
									-	
									- 680.0 - - -	
2.5										

						В	ORI	NG N	NUMBER B PAGE	
				Mitigation Office (DRFM)				otechnic	cal Investigation	
	T NUMBER 21			MDI ETED 2/17/01					7E 150 mm	
	G CONTRACTOR			Ing Inc.	_				ZE <u>152 mm</u> D BY <u>A. Ocejo</u>	
	G METHOD So						_			
DTES	Beside Riversio	le Terrace	Condos	(River Side of Dike)	14Days AFTER DF	RILLING[Dry			
Ê	▲ SPT N Value 10 20 30		SYMBOL	 		ΥPE iR	IE)	WELL		
	PL MC		SYM	SO		LE T MBE	SPT (N VALUE)	PIPE	OTHER TESTS COMMENTS	
<u>لا</u>	20 40 60	80	SOIL	DESCRI	PHON	SAMPLE TYPE NUMBER	ž	STANDPIPE	COMMENTS	
_				(CH) CLAY (FILL), sandy (graded), silty, trace gravel,	high plastic, stiff, light				Fill soils appear to be	-
4				brown, trace pottery (orang	eneu) noteu, uamp	M GB			well compacted in this area.	F
4						び 04-01			Adjacent ground surface	F
_									elevation ~680.5m.	F
1	<u> </u>	- -							LL=68% PL=30%	6
	•	4				ST ST-01			LL=66% PL=29%	F
						GB 04-02				╞
1				from 1.5m, increasing sa	nd and silt fraction very				Gravel = 2.6%	╞
1				stiff	in and sit fraction, very	SPT	10-13- 11		Sand = 41.3%	F
						<u>04-03</u> GB	(24)		Silt = 34.3% Clay = 21.8%	L_
2	++++					04-04_/				6
-									3 	L
-				from 2.4m, stiff, dark brow	vn	CP.			PL = 77%	
-	•					₩ GB 04-05			LL = 30%	Γ
-										F
3		- : : : -		from 2m stiff shundart	nodium plantia nartina-					6
4				from 3m, stiff, abundant r noted, moist	neurum prastic partings	SPT	7-9-4			F
						04-06	(13)			ŀ
						GB				╞
						04-07				╞
1										6
						m GB				ŀ
1	•					04-08		NN		Ļ
4				(ML) SILT, sandy (fine grai clay, stiff, low plastic, coal/	carbonaceous inclusion	M GB 04-09		NN		L
+				noted, damp		SPT	2-5-4	$\mathbb{N}\mathbb{N}$		L
4						04-10	(9)	$\mathbb{N}\mathbb{N}$		
5				End of borehole at 5.00 m.					•	6
4				50mm PVC standpipe insta	alled to 2.8m.					F
				1.5m slotted pipe. Backfilled with 1m of cuttin	gs followed by 1m of					F
				bentonite, followed by 1.7n 0.9m of bentonite, followed						╞
				surface. Dry at completion.	-					╞
				2.7				1	1	1

					BC	RIN	g ni	JMBER BH PAGE	1 OF 1			
CLIEN	T Drumheller Resiliency a	and Flood Mitigat	ion Office (DRFM)	PROJECT NAME	umheller Dike	heller Dike D - Geotechnical Investigation						
PROJE	ECT NUMBER _ 21.2311.00	2		PROJECT LOCATION								
DATE	STARTED _ 3/17/21		TED 3/17/21	GROUND ELEVATION	682.9 m	H		ZE <u>152 mm</u>				
DRILLI		ervice Drilling Inc		LOGGED BY T. Sch	aepsmeyer	c	HECKE	DBY A. Ocejo				
DRILLI	NG METHOD Solid Stem	Auger		GROUND WATER LEV	VEL:							
NOTES	Beside Riverside Terrac	e Condos (River	Side of Dike)	AFTER DRILLING								
DEPTH (m)	▲ SPT N Value ▲ 10 20 30 40 PL MC LL 20 40 60 80	SOIL SYMBOL	SC DESCR		SAMPLE TYPE NUMBER	SPT (N VALUE)	STANDPIPE WELL	OTHER TESTS COMMENTS	ELEVATION (m)			
 		grad) CLAY (FILL), sandy (led), silty, trace gravel vn, trace pottery (orang	, high plastic, stiff, light	₩ GB 04C-01			Fill soils appear to be well compacted in this area. Adjacent ground surface elevation ~680.5m.	- - - - - - - - - - - - - - - - - - -			
1.5		- Hole No s	of borehole at 1.40 m was backfilled with co seepage observed whi at completion.	uttings.					681.5			
2.0			a compieuon.						- - - - - - -			
2.5									680.5			

					В	ORI	NG N	NUMBER B PAGE	H-05 1 OF 1	
PR DA DR DR	ROJECT NUMBER _ 21.2311.00 ATE STARTED _ 3/17/21 RILLING CONTRACTOR _ All Se RILLING METHOD _ Solid Stem	2 C ervice Dr Auger	PROJECT OMPLETED _3/17/21 GROUND illing Inc. LOGGED I GROUND GROUND							
	E D A SPT N Value ▲ 10 20 30 40 PL MC LL 20 40 60 80	SOIL SYMBOL	SOIL DESCRIPTIO	N	SAMPLE TYPE NUMBER	SPT (N VALUE)	STANDPIPE WELL	OTHER TESTS COMMENTS	ELEVATION (m)	
	- - - 1		(ML-SM) SILT & SAND (FILL), fine grain trace clay, trace gravel, stiff, low plastic, stiff/compact, light brown, moist		m GB 05-01			Fill soils appear to be poorly compacted in this area. Adjacent ground surface elevation ~681.5m.	- 683 - - -	
		-	from 1.1m, coal/carbonaceous seam (from 1.4m, clayey, medium plastic, stif brown from 2m, trace to some clay, low to me firm to stiff	f/loose,	ST ST-03 GB 05-02 SPT 05-03 GB 05-04	4-8-6 (14)		Gravel = 4.8% Sand = 34.3% Silt = 37.4% Clay = 23.5% LL = 47% PL = 24%	682 - - - - - 681 -	
		-	from 3m, high plastic clay parting within thick) (CI) CLAY, silty, some sand (fine grained graded), trace gravel, medium plastic, fir brown, random high plastic clay partings	d/poorly m, dark		3-2-3 (5)	-		- - 680 - - -	
	5 - - - - - - - - - - - - - -		from 4.6m, medium plastic clay parting trace coal specs (0.4m thick), damp End of borehole at 5.00 m. 50mm PVC standpipe installed to 2.4m. 1.5m slotted pipe. Backfilled with 0.4m of cuttings followed bentonite, followed by 1.8m of sand, folk 0.3m of bentonite, followed by 0.3m of sa surface. Dry at completion.	by 2.2m of owed by	GB 05-08 SPT 05-09	2-3-3 (6)			- 679 - - - - - 678 - -	

		ONSI d Floo	JLTANTS	PAGE 1 OF PROJECT NAME Drumheller Dike D - Geotechnical Investigation					
PROJ	ECT NUMBER21.2311.002			PROJECT LOCATION	Drumheller	, AB			
	STARTED _ 3/17/21		OMPLETED	-				ZE <u>152 mm</u>	
DRILL	ING CONTRACTOR All Serv	/ice Dr	illing Inc.	LOGGED BY T. Schae	epsmeyer	c	HECKE	D BY <u>A. Ocejo</u>	
	ING METHOD Solid Stem A								
NOTE	S _Curling Rink (River Side c	of Dike)	AFTER DRILLING					
DEPTH (m)	▲ SPT N Value ▲ 10 20 30 40 PL MC LL 20 40 60 80	SOIL SYMBOL	SOI DESCRI		SAMPLE TYPE NUMBER	SPT (N VALUE)	STANDPIPE WELL	OTHER TESTS COMMENTS	ELEVATION (m)
 - 0.5			(ML-SM) SILT & SAND (FIL some clay, low to medium pi hard/compact to dense, poo random clay shale nodules r	astic, very stiff to rly graded, brown,	₩ GB 06-01	-		Fill soils have varying degrees of compaction in this area. Adjacent ground surface elevation ~681.5m.	- - 683.0 - - -
 _ 1.0	· · · · · · · · · · · · · · · · · · ·		from 0.9m, mottled orange	and brown	SPT 06-02	16-19- 16 (35)			- 682.5 - -
 1.5	•		from 1.2m, some clay, me light brown	dium plastic, hard/dense,	GB 06-03	`´´			- 682.0 -
2.0	•		from 1.8m, low plastic, har (orange/red) noted	d/dense, trace pottery	SPT 06-04 GB 06-05	33-32- 17 (49)			- - 681.5 - -
 <u>2.5</u>			from 2.4m, trace clay, soft coal/carbonaceous inclusior		(m) GB 06-06	-			-
 3.0		-	(ML-SM) SILT & SAND, fine clay, low plastic, loose/soft, damp	grained, trace to some poorly graded, brown,		-			- 680.5 -
 3.5	•				SPT 06-07	1-2-1 (3)			- - - 680.0
 4.0			End of borehole at 3.50 m. Hole was backfilled with 2.6 0.6m of bentonite, followed l surface. No seepage observed while Dry at completion.	by 0.3m of cuttings to					- - - - 679.5
 									- - - 679.0

					В	ORI	NG N	IUMBER B PAGE	1 OF
PROJ DATE DRILL DRILL	ECT NUMBER _21.2311.002 STARTED _3/17/21 LING CONTRACTOR _All Set	2 C rvice Dr Auger	OMPLETED <u>3/17/21</u>	PROJECT NAME Drumheller Dike D - Geotechnical Investigation PROJECT LOCATION Drumheller, AB GROUND ELEVATION 682.9 m HOLE SIZE 152 mm LOGGED BY T. Schaepsmeyer GROUND WATER LEVEL: 14Days AFTER DRILLING					
DEPTH (m)	▲ SPT N Value ▲ 10 20 30 40 PL MC LL 20 40 60 80	SOIL SYMBOL	SOI DESCRI		SAMPLE TYPE NUMBER	SPT (N VALUE)	STANDPIPE WELL	OTHER TESTS COMMENTS	ELEVATION (m)
			(SM) SAND (FILL), fine grair clay, loose, poorly graded, da coal/carbonaceous inclusion from 0.9m onwards, trace p noted	ark brown, trace of s noted, damp	GB 07-01 07-02 GB 07-03	2-3-2 (5)		Fill soils appear to have poor compaction in this area. Adjacent ground surface elevation ~683m. Sand = 54.1% Silt = 31.8% Clay = 14.1%	- - - 682 -
 			(SM) SAND, fine grained, sill loose, poorly graded, light br coal/carbonaceous inclusion damp	own, trace of	SPT 07-04 07-05	3-2-2 (4)			- - 681 - -
3		_	(ML) SILT, sandy (fine graine to some clay, firm, fine graine graded, light brown, moist (ML-SM) SILT & SAND, coar some clay, firm/loose, low pla	ed, low plasticity, poorly	GB 07-06 SPT 07-07	3-3-4 (7)		Sand = 21.8% Silt = 59.2% Clay = 19.0%	- 680 - -
			graded, light brown, moist at 3.7m, coal layer (0.6m th (SM) SAND, fine to coarse g clay, compact, moderately gr	nickness) rain, silty, gravely, trace	M GB 07-08 07-09 07-09 SPT 07-10	12-11- 14 (25)			- - - - -
5			End of borehole at 5.00 m. 50mm PVC standpipe install 3m slotted pipe. Backfilled with 4.2m of cuttin bentonite, followed by 0.2m o Dry at completion.	gs followed by 0.6m of					- - - - - - -


	SWEET				Т	EST	PIT	NUMBER 1 PAGE	1 OF 1
	ENGINEERING (ULTANTS d Mitigation Office (DRFM)	PROJECT NAME _ Drui	mheller Dił	(e D - 0	Geotech	nical Investigation	
PROJE	CT NUMBER21.2311.002	2		PROJECT LOCATION	Drumhelle	er, AB			
DATE	STARTED 7/16/21		COMPLETED _7/16/21	GROUND ELEVATION	680.8 m		TEST I	PIT SIZE	
			5703807m E: 90317m						
	¥_1								
DEPTH (m)	▲ SPT N Value ▲ 20 40 60 80 PL MC LL 20 40 60 80	SOIL SYMBOL	SOI DESCRII		SAMPLE TYPE NUMBER	SPT (N VALUE)	STANDPIPE WELL	OTHER TESTS COMMENTS	ELEVATION (m)
 0.5			FILL (SILT), sandy, lumber p to stiff, non to low plastic, lig				<u></u>		- - 680.5
 			SILT, trace to some fine san non to low plastic, thinly bed brown, damp to dry	d, roots, stiff to very stiff, ded (< 1mm), light					- - - 680.0
<u> 1.0</u> -			@1.1 m trace clay, no roo plastic, damp	ts, very stiff to hard, low	₩ GB	-		PP: 150 kPa @1.1m PROBE: 30 kg/cm ² PP: 250 kPa	- - - 679.5 -
			@1.6 m hard		₩ GB	-		PP: 450 kPa @1.6m PROBE: 35 kg/cm ²	- - 679.0 -
			SAND, trace silt, fine grained brown, damp	d, uniformly graded, light	_				- - 678.5 - -
			@2.7 m medium grained, bedded (< 1 mm) silt pieces,	random very stiff thinly damp to moist	∰ GB	-			- - 678.0 - -
ан на н		• •	SAND, trace gravel, trace co grained, grey, moist to wet END OF TESTPIT @ 3.4 m - Sloughing sand from 2.2 m	/	₩ GB	-			- 677.5
			 No groundwater encounter Backfilled with excavated n packed in place 	ed					- - 677.0 -

					I	ESI	PII	NUMBER I PAGE	P-02 1 OF 1		
CLIEN	T _Drumheller Resiliency ar	nd Flood	Mitigation Office (DRFM)	PROJECT NAME _ Drun	nheller Dik	ke D - C	Geotech	nical Investigation			
	ECT NUMBER21.2311.002										
			DMPLETED 7/16/21								
							CHECI	KED BY <u>A. Ocejo</u>			
			200757 F. 00000								
NOTE	S _DIKE D Bearing Inspectio	<u>n N:5</u>	703757 E: 90360m	AFTER EXCAVATIO	/N						
DEPTH (m)	▲ SPT N Value ▲ 20 40 60 80 PL MC LL 20 40 60 80	SOIL SYMBOL	SO DESCRI		SAMPLE TYPE NUMBER	SPT (N VALUE)	STANDPIPE WELL	OTHER TESTS COMMENTS	ELEVATION (m)		
			FILL (SILT), sandy, roots, m low-plastic, light brown, dry SILT, some fine grained sar brown, dry to damp		-				- 681.5 - - -		
0.5			@0.5 m sandy, damp to r	noist				@0.4m PROBE: 10kg/cm ²	- 681.0 -		
								@0.7m PROBE: 15kg/cm ²	-		
<u> </u>					🔥 GB	-		PP: 80 kPa @1.0m PROBE: 12kg/cm ²	680.5 - - -		
1.5			@1.5 m 5 cm thick layer (stiff, thinly bedded (< 1 mm) @1.6 m trace clay, moist		🖑 GB	_		PP: 130 kPa	680.0 - -		
 			CLAY, silty, trace sand, stiff brown, moist	2 .	∰ GB			@1.8m PROBE: 15kg/cm ²	- - 679.5		
			SAND, trace silt, medium to	fine grained, grey, damp					-		
					🔥 GB	-			679.0 - - -		
									- 678.5 -		
			END OF TESTPIT @ 3.3 m - No sloughing - No groundwater - Backfilled with excavated i packed in place	naterial and bucket					- 678.0 - -		
 - 4.0									_		



DRFM DIKE D – GEOTECHNICAL INVESTIGATION REPORT

Appendix 3: Lab Test Reports

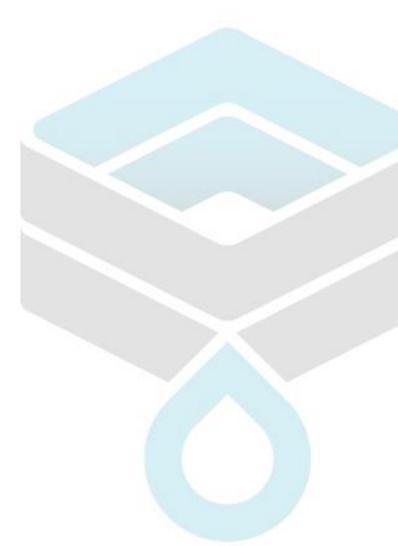



GEOTECHNICAL & MATERIAL TESTING LABORATORY

Geo-Lab Report

Revision # 0

#9-3620 29 St. NE, Calgary, AB T1Y 5Z8 Phone: (403)250-3035 Cell: (403)619-7250 Prime email: solum@mymts.net 2nd email: solumconsultantsltd111@outlook.com www.solumconsultantsltd.com

Report Date: March 26, 2021 Client: Sweet Tech Eng. Address: 100, 1929 10 Ave. SW, Calgary, AB T3C 0K3 Thomas Schaepsmeyer Attn: Project No: 21.2311.002 Drumheller Dike D Project Name: Solum Job No.: 09401210322(46) March 22, 2021 Sample Received Date: 5 pails, 1 ST Sample Quantity:

Test	Quantity	ASTM Destination
WATER CONTENT	33	D2216
ATTERBERG LIMITS	6	D4318
PARTICLE-SIZE ANALYSIS (FULL GRADATION)	7	D422
UNCONFINED COMPRESSIVE STRENGTH FOR SOIL	1	D2166

Mby

President: Saad Farag



Laboratory Analysis Summary Sheet

GEOTECHNICAL & MATERIAL TESTING LABORATORY

Project Info: 21.2311.002 / Drumheller Dike D

Client: Sweet Tech Eng.

Solum Job No.: 09401210322(46)

* Note: Soil classification is for material less than 0.425 mm (material used for Atterberg Limits), this includes the fine sand, silt and clay fraction of the sample.

** Note: Soil classification is for the whole sample. Soil classification uses the Atterberg Limits results and the percent fines, percent sand and percent gravel as described in ASTM D2487.

		ent		Atterbe	rg Limits		Particle Size Analysis				
Borehole ID	Sample ID	Moisture Content (%)	Liquid Limit(%)	Plastic Limit(%)	Plastic Index(%)	Classification* (USCS)	Cobble Size (%) (75-300mm)	Gravel Size (%) (4.75-75mm)	Sand Size (%) (0.0754.5mm)	Silt Size (%) (0.002-0.075 mm)	Clay Size (%) (<0.002mm)
BH-02	02-2A	24.6					0.0	3.7	21.1	46.3	28.9
BH-02	02-08	28.3					0.0	3.2	33.8	47.2	15.8
BH-02	02-09	31.5	38	21	17	CL					
BH-03	03-2B	8.0	27	21	6	CL-ML					
BH-03	03-04	18.2					0.0	0.0	43.5	48.2	8.3
BH-04	04-01	21.7	68	30	38	СН					
BH-04	04-02	14.1	66	29	37	СН					
BH-04	04-03	15.2					0.0	2.6	41.3	34.3	21.8
BH-04	04-05	17.3	77	30	47	СН					
ВН-05	05-03	17.4					0.0	4.8	34.3	37.4	23.5
BH-05	05-04	13.3	47	24	23	CL					
BH-07	07-02	4.8					0.0	0.0	54.1	31.8	14.1
BH-07	07-06	8.5					0.0	0.0	21.8	59.2	19.0

SOULTANTS LTD.

Water (Moisture) Content (ASTM D2216)

GEOTECHNICAL & MATERIAL TESTING LABORATORY

Project Info:	21.2311.002 / Drumheller Dike D

Client: Sweet Tech Eng.

Solum Job No.: 09401210322(46)

Borehole ID	Sample ID	Depth	Wet soil wt + Tare (g)	Dry soil wt + Tare (g)	Wt of water (g)	Tare (g)	Dry soil weight (g)	Moisture content (%)
BH-01	01-02		91.74	85.40	6.34	14.05	71.35	8.9
BH-01	01-04		67.24	57.49	9.75	11.39	46.10	21.1
BH-01	01-05		83.35	72.65	10.70	11.65	61.00	17.5
BH-01	01-06		62.88	49.43	13.45	11.24	38.19	35.2
BH-01	01-08		83.74	71.74	12.00	14.62	57.12	21.0
BH-01	01-09		103.20	83.20	20.00	13.05	70.15	28.5
BH-01	01-11		94.57	82.26	12.31	11.05	71.21	17.3
BH-02	02-1A		81.92	68.52	13.40	10.99	57.53	23.3
BH-02	02-03		78.41	63.83	14.58	10.55	53.28	27.4
BH-02	02-05		77.61	66.42	11.19	10.76	55.66	20.1
BH-02	02-06		95.19	81.04	14.15	15.14	65.90	21.5
BH-03	03-01		144.18	138.86	5.32	15.71	123.15	4.3
BH-03	03-05		83.43	72.65	10.78	11.27	61.38	17.6
BH-03	03-06		82.94	65.88	17.06	10.44	55.44	30.8
BH-03	03-08		88.40	70.30	18.10	10.62	59.68	30.3
BH-03	03-09		91.52	80.99	10.53	9.22	71.77	14.7
BH-04	04-06		70.14	62.70	7.44	10.97	51.73	14.4
BH-04	04-08		74.79	60.22	14.57	11.94	48.28	30.2
BH-04	04-10		89.08	73.78	15.30	14.89	58.89	26.0
BH-05	05-01		88.23	76.00	12.23	13.94	62.06	19.7
BH-05	05-02		84.52	73.95	10.57	14.81	59.14	17.9
BH-05	05-06		64.59	57.44	7.15	11.01	46.43	15.4
BH-05	05-08		88.15	77.06	11.09	13.58	63.48	17.5
BH-05	05-09		89.62	75.15	14.47	13.89	61.26	23.6
BH-06	06-02		82.06	70.60	11.46	13.05	57.55	19.9



Water (Moisture) Content (ASTM D2216)

GEOTECHNICAL & MATERIAL TESTING LABORATORY

Project Info:	21.2311.002 / Drumheller Dike D

Client: Sweet Tech Eng.

Solum Job No.: 09401210322(46)

Borehole ID	Sample ID	Depth	Wet soil wt + Tare (g)	Dry soil wt + Tare (g)	Wt of water (g)	Tare (g)	Dry soil weight (g)	Moisture content (%)
BH-06	06-03		71.24	61.21	10.03	11.87	49.34	20.3
BH-06	06-04		102.73	93.03	9.70	16.63	76.40	12.7
BH-06	06-06		69.08	61.77	7.31	11.01	50.76	14.4
BH-06	06-07		75.05	67.33	7.72	13.60	53.73	14.4
BH-07	07-04		87.24	82.46	4.78	14.25	68.21	7.0
BH-07	07-07		80.90	75.82	5.08	13.68	62.14	8.2
BH-07	07-09		119.23	114.93	4.30	13.36	101.57	4.2
BH-07	07-10		90.62	85.01	5.61	14.38	70.63	7.9

GEOTECHNICAL & MATERIAL TESTING LABORATORY


Project Info:	21.2311.002 / Drumheller Dike D
Client:	Sweet Tech Eng.


Solum Job No.: 09401210322(46)


Sample Info: BH-02 02-09

	Liquid Limit	Liquid Limit (Air-Dried) - Multipoint Method			Water Content Received	
Container ID	1	2	3	water Conte	nt Received	
Number of Blows	12	24	37			
W _{Wet Soil} + Tare (g)	23.86	24.17	27.29			
W _{Dry Soil} + Tare (g)	18.52	19.05	21.54			
W _{Water} (g)	5.34	5.12	5.75			
Tare (g)	5.61	5.63	5.59			
W _{Dry Soil} (g)	12.91	13.42	15.95	Water Content (0/)	31.5	
Water Content (%)	41.4	38.2	36.1	Water Content (%)	31.5	

	Plastic Limit				
Container ID	4	5			
W _{Wet Soil} + Tare (g)	23.60	25.13			
W _{Dry Soil} + Tare (g)	20.48	21.78			
W _{Water} (g)	3.12	3.35			
Tare (g)	5.58	5.59			
W _{Dry Soil} (g)	14.90	16.19			
Water Content (%)	20.9	20.7			
Average Mc (%)	20).8			







GEOTECHNICAL & MATERIAL TESTING LABORATORY


Project Info:	21.2311.002 / Drumheller Dike D
Client:	Sweet Tech Eng.


Solum Job No.: 09401210322(46)


Sample Info: BH-03 03-2B

	Liquid Limit (Air-Dried) - Multipoint Method			Water Content Dessived	
Container ID	1	2 3		Water Content Received	
Number of Blows	10	23	34		
W _{Wet Soil} + Tare (g)	24.95	30.30	29.27		
W _{Dry Soil} + Tare (g)	20.60	24.98	24.29		
W _{Water} (g)	4.35	5.32	4.98		
Tare (g)	5.57	5.55	5.58		
W _{Dry Soil} (g)	15.03	19.43	18.71	Water Content (9/)	8.0
Water Content (%)	28.9	27.4	26.6	Water Content (%)	8.0

	Plastic Limit		
Container ID	4	5	
W _{Wet Soil} + Tare (g)	22.31	26.87	
W _{Dry Soil} + Tare (g)	19.37	23.14	
W _{Water} (g)	2.94	3.73	
Tare (g)	5.62	5.61	
W _{Dry Soil} (g)	13.75	17.53	
Water Content (%)	21.4	21.3	
Average Mc (%)	21	1.3	







GEOTECHNICAL & MATERIAL TESTING LABORATORY

Project Info:	21.2311.002 /	Drumheller Dike D


Client: Sweet Tech Eng.


Solum Job No.: 09401210322(46)


Sample Info: BH-04 04-01

	Liquid Limit	Liquid Limit (Air-Dried) - Multipoint Method			Water Content Received	
Container ID	1	2	3	water Conte	nt Received	
Number of Blows	14	27	37			
W _{Wet Soil} + Tare (g)	28.90	27.24	26.36			
W _{Dry Soil} + Tare (g)	19.21	18.53	18.13			
W _{Water} (g)	9.69	8.71	8.23			
Tare (g)	5.64	5.59	5.57			
W _{Dry Soil} (g)	13.57	12.94	12.56	Water Content (0/)	21.7	
Water Content (%)	71.4	67.3	65.5	Water Content (%)	21.7	

	Plastic Limit			
Container ID	4	5		
W _{Wet Soil} + Tare (g)	18.32	23.84		
W _{Dry Soil} + Tare (g)	15.40	19.65		
W _{Water} (g)	2.92	4.19		
Tare (g)	5.59	5.62		
W _{Dry Soil} (g)	9.81	14.03		
Water Content (%)	29.8	29.9		
Average Mc (%)	29	9.8		







GEOTECHNICAL & MATERIAL TESTING LABORATORY

Project Info:	21.2311.002 ,	/	Drumheller Dike D


Client: Sweet Tech Eng.


Solum Job No.: 09401210322(46)


Sample Info: BH-04 04-02

	Liquid Limit	Liquid Limit (Air-Dried) - Multipoint Method			Water Content Received	
Container ID	1	2	3	water Conte	nt Kecelveu	
Number of Blows	13	22	39			
W _{Wet Soil} + Tare (g)	26.19	24.66	23.86			
W _{Dry Soil} + Tare (g)	17.74	17.02	16.72			
W _{Water} (g)	8.45	7.64	7.14			
Tare (g)	5.56	5.62	5.68			
W _{Dry Soil} (g)	12.18	11.40	11.04	Water Content (0/)	14.1	
Water Content (%)	69.4	67.0	64.7	Water Content (%)	14.1	

	Plastic Limit			
Container ID	4	5		
W _{Wet Soil} + Tare (g)	20.86	26.83		
W _{Dry Soil} + Tare (g)	17.43	22.07		
W _{Water} (g)	3.43	4.76		
Tare (g)	5.60	5.57		
W _{Dry Soil} (g)	11.83	16.50		
Water Content (%)	29.0	28.8		
Average Mc (%)	28	3.9		







GEOTECHNICAL & MATERIAL TESTING LABORATORY

Project Info:	21.2311.002 /	Drumheller Dike D


Client: Sweet Tech Eng.


Solum Job No.: 09401210322(46)


Sample Info: BH-04 04-05

	Liquid Limit (Air-Dried) - Multipoint Method		Water Conto	nt Doosiwod		
Container ID	1	2	3	water Conte	Water Content Received	
Number of Blows	13	24	38			
W _{Wet Soil} + Tare (g)	26.56	22.11	22.63			
W _{Dry Soil} + Tare (g)	17.10	14.91	15.38			
W _{Water} (g)	9.46	7.20	7.25			
Tare (g)	5.59	5.62	5.63			
W _{Dry Soil} (g)	11.51	9.29	9.75	Water Content (9/)	17.2	
Water Content (%)	82.2	77.5	74.4	Water Content (%)	17.3	

	Plastic	Plastic Limit		
Container ID	4	5		
W _{Wet Soil} + Tare (g)	18.01	21.05		
W _{Dry Soil} + Tare (g)	15.12	17.47		
W _{Water} (g)	2.89	3.58		
Tare (g)	5.58	5.63		
W _{Dry Soil} (g)	9.54	11.84		
Water Content (%)	30.3	30.2		
Average Mc (%)	30).3		







GEOTECHNICAL & MATERIAL TESTING LABORATORY


Project Info:	21.2311.002 / Drumheller Dike D
Client:	Sweet Tech Eng.


Solum Job No.: 09401210322(46)


Sample Info: BH-05 05-04

	Liquid Limit (Air-Dried) - Multipoint Method		Watan Conto	nt Dessived		
Container ID	1	2	3	water Conte	Water Content Received	
Number of Blows	14	23	37			
W _{Wet Soil} + Tare (g)	26.24	23.74	24.20			
W _{Dry Soil} + Tare (g)	19.25	17.88	18.45			
W _{Water} (g)	6.99	5.86	5.75			
Tare (g)	5.58	5.61	5.58			
W _{Dry Soil} (g)	13.67	12.27	12.87	Water Content (0/)	13.3	
Water Content (%)	51.1	47.8	44.7	Water Content (%)	15.5	

	Plastic	Plastic Limit		
Container ID	4	5		
W _{Wet Soil} + Tare (g)	21.89	22.68		
W _{Dry Soil} + Tare (g)	18.78	19.37		
W _{Water} (g)	3.11	3.31		
Tare (g)	5.62	5.54		
W _{Dry Soil} (g)	13.16	13.83		
Water Content (%)	23.6	23.9		
Average Mc (%)	23	3.8		











GEOTECHNICAL & MATERIAL TESTING LABORATORY



SIEVE SIZE	PARTICLE- SIZE (mm)	PERCENT FINER (%)	
	300.000	100.00	
3"	75.000	100.00	
2"	50.000	100.00	
1.5"	37.500	100.00	
1"	25.000	100.00	
0.75"	19.000	100.00	
0.375"	9.500	100.00	
No. 4	4.750	96.26	
No. 10	2.000	94.74	
No. 20	0.850	88.55	
No. 40	0.425	85.71	
No. 60	0.250	83.14	
No. 100	0.150	80.29	
No. 140	0.106	77.52	
No. 200	0.075	75.14	
	0.0422	70.92	
	0.0303	66.71	
	0.0195	62.50	
с.	0.0156	59.34	
ETE	0.0115	56.18	
HYDROMETER	0.0083	49.87	
YDR	0.0060	43.55	
τ	0.0043	37.23	
	0.0031	33.02	
	0.0022	28.81	*1
	0.0013	24.60	

	Т	est Results		
Cobbles	Gravel	Sand	Silt	Clay
(75-300mm)	(4.75-75mm)	(0.075-4.75mm)	0.002-0.075mm	<0.002mm
0.0	3.7	21.1	46.3	28.9

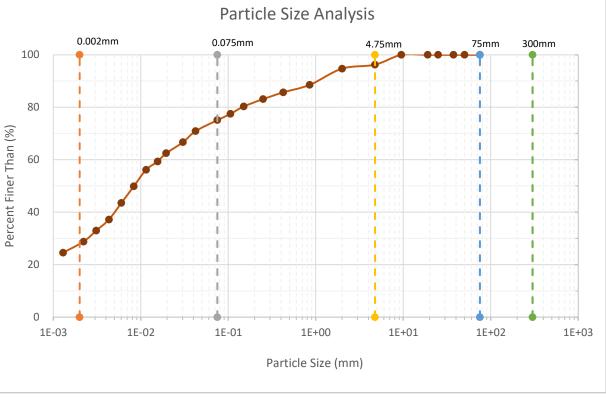

Note: Criteria for clay is based on D7928; sieve sequence is based on D6913.



GEOTECHNICAL & MATERIAL TESTING LABORATORY

 Project Info:
 21.2311.002 / Drumheller Dike D


 Client:
 Sweet Tech Eng.

 Solum Job No.:
 09401210322(46)

 Sample Info:
 BH-02 02-08

SIEVE SIZE	PARTICLE- SIZE (mm)	PERCENT FINER (%)	
	300.000	100.00	
3"	75.000	100.00	
2"	50.000	100.00	
1.5"	37.500	100.00	
1"	25.000	100.00	
0.75"	19.000	100.00	
0.375"	9.500	97.84	
No. 4	4.750	96.85	
No. 10	2.000	96.44	
No. 20	0.850	94.32	
No. 40	0.425	92.08	
No. 60	0.250	89.49	
No. 100	0.150	82.49	
No. 140	0.106	74.67	
No. 200	0.075	63.01	
	0.0458	46.67	
	0.0333	38.44	
	0.0216	30.21	
щ	0.0172	28.15	
HYDROMETER	0.0126	26.09	
WO	0.0090	24.03	
DR /DR	0.0064	21.98	
L Í	0.0045	19.92	
	0.0032	17.86	
	0.0023	15.80	1*
	0.0013	13.75	

	Т	est Results		
Cobbles	Gravel	Sand	Silt	Clay
(75-300mm)	(4.75-75mm)	(0.075-4.75mm)	0.002-0.075mm	<0.002mm
0.0	3.2	33.8	47.2	15.8

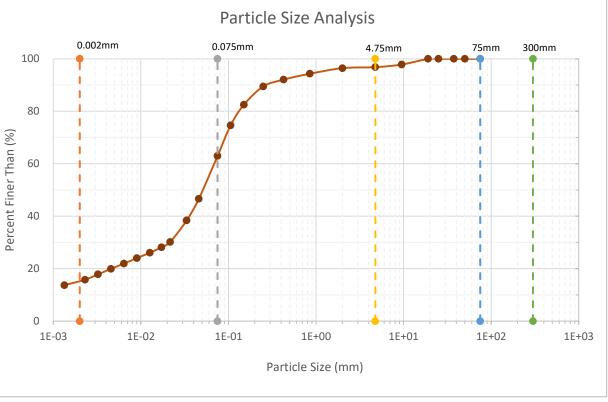

*Note: Criteria for clay is based on D7928; sieve sequence is based on D6913.



GEOTECHNICAL & MATERIAL TESTING LABORATORY

 Project Info:
 21.2311.002 / Drumheller Dike D


 Client:
 Sweet Tech Eng.

 Solum Job No.:
 09401210322(46)

 Sample Info:
 BH-03 03-04

SIEVE SIZE	PARTICLE- SIZE (mm)	PERCENT FINER (%)	
	300.000	100.00	
3"	75.000	100.00	
2"	50.000	100.00	
1.5"	37.500	100.00	
1"	25.000	100.00	
0.75"	19.000	100.00	
0.375"	9.500	100.00	
No. 4	4.750	100.00	
No. 10	2.000	100.00	
No. 20	0.850	98.26	
No. 40	0.425	96.33	
No. 60	0.250	94.10	
No. 100	0.150	85.24	
No. 140	0.106	69.78	
No. 200	0.075	56.49	
	0.0474	39.84	
	0.0344	30.82	
	0.0221	24.06	
R	0.0176	21.81	
HYDROMETER	0.0129	19.56	
MO	0.0092	17.31	
rdr	0.0065	15.05	
ŕ	0.0046	12.80	
	0.0033	10.55	
	0.0023	8.29	*1
	0.0014	6.04	

		Т	est Results		
	Cobbles	Gravel	Sand	Silt	Clay
	(75-300mm)	(4.75-75mm)	(0.075-4.75mm)	0.002-0.075mm	<0.002mm
0.0 0.0 43.5 48.2 8.3	0.0	0.0	43.5	48.2	8.3

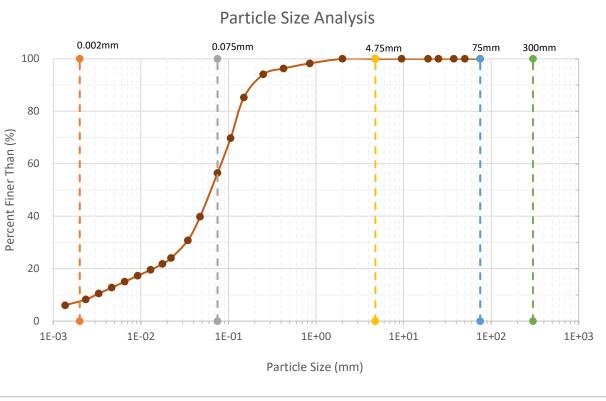

Note: Criteria for clay is based on D7928; sieve sequence is based on D6913.




GEOTECHNICAL & MATERIAL TESTING LABORATORY

Client:

Project Info: 21.2311.002 / Drumheller Dike D Sweet Tech Eng. Solum Job No.: 09401210322(46) Sample Info: BH-04 04-03

SIEVE SIZE	PARTICLE- SIZE (mm)	PERCENT FINER (%)	
	300.000	100.00	
3"	75.000	100.00	
2"	50.000	100.00	
1.5"	37.500	100.00	
1"	25.000	100.00	
0.75"	19.000	100.00	
0.375"	9.500	100.00	
No. 4	4.750	97.39	
No. 10	2.000	73.90	
No. 20	0.850	67.93	
No. 40	0.425	64.83	
No. 60	0.250	62.89	
No. 100	0.150	60.42	
No. 140	0.106	58.62	
No. 200	0.075	56.08	
	0.0442	47.48	
	0.0319	43.19	
	0.0205	38.91	
ц	0.0163	37.19	
HYDROMETER	0.0120	35.47	
IWO	0.0086	32.04	
RU NU	0.0062	28.61	
1 f	0.0044	25.18	
	0.0031	23.47	
	0.0022	21.75	*1
	0.0013	20.04	

Test Results					
Cobbles	Gravel	Sand	Silt	Clay	
(75-300mm)	(4.75-75mm)	(0.075-4.75mm)	0.002-0.075mm	<0.002mm	
0.0	2.6	41.3	34.3	21.8	

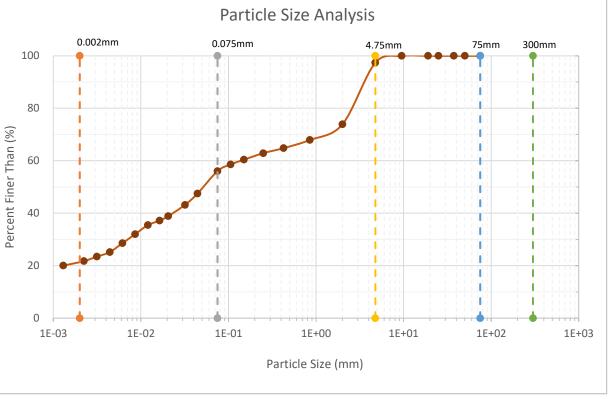

Note: Criteria for clay is based on D7928; sieve sequence is based on D6913.



GEOTECHNICAL & MATERIAL TESTING LABORATORY

 Project Info:
 21.2311.002 / Drumheller Dike D


 Client:
 Sweet Tech Eng.

 Solum Job No.:
 09401210322(46)

 Sample Info:
 BH-05 05-03

SIEVE SIZE	PARTICLE- SIZE (mm)	PERCENT FINER (%)	
	300.000	100.00	
3"	75.000	100.00	
2"	50.000	100.00	
1.5"	37.500	100.00	
1"	25.000	100.00	
0.75"	19.000	100.00	
0.375"	9.500	100.00	
No. 4	4.750	95.18	
No. 10	2.000	94.48	
No. 20	0.850	92.97	
No. 40	0.425	91.62	
No. 60	0.250	86.77	
No. 100	0.150	74.05	
No. 140	0.106	66.87	
No. 200	0.075	60.89	
	0.0446	53.69	
	0.0320	49.66	
	0.0205	45.64	
Ř	0.0163	43.63	
HYDROMETER	0.0120	41.62	
WO	0.0086	37.59	
ADR 1	0.0062	33.57	
Г Í	0.0044	29.54	
	0.0031	26.52	
	0.0022	23.50	*
	0.0013	19.48	

Test Results					
Cobbles	Gravel	Sand	Silt	Clay	
(75-300mm)	(4.75-75mm)	(0.075-4.75mm)	0.002-0.075mm	<0.002mm	
0.0	4.8	34.3	37.4	23.5	

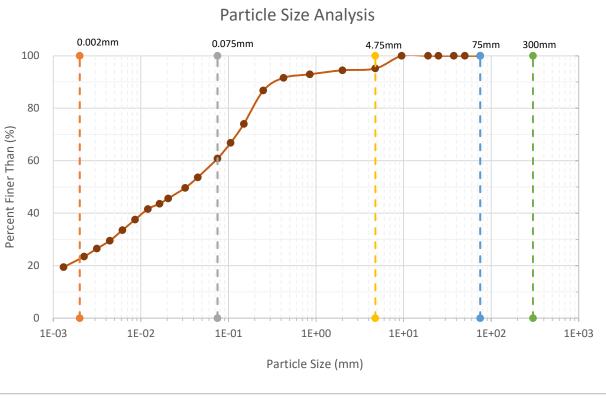

*Note: Criteria for clay is based on D7928; sieve sequence is based on D6913.



GEOTECHNICAL & MATERIAL TESTING LABORATORY

 Project Info:
 21.2311.002 / Drumheller Dike D


 Client:
 Sweet Tech Eng.

 Solum Job No.:
 09401210322(46)

 Sample Info:
 BH-07 07-02

SIEVE SIZE	PARTICLE- SIZE (mm)	PERCENT FINER (%)	
	300.000	100.00	
3"	75.000	100.00	
2"	50.000	100.00	
1.5"	37.500	100.00	
1"	25.000	100.00	
0.75"	19.000	100.00	
0.375"	9.500	100.00	
No. 4	4.750	100.00	
No. 10	2.000	100.00	
No. 20	0.850	96.27	
No. 40	0.425	86.67	
No. 60	0.250	70.36	
No. 100	0.150	59.18	
No. 140	0.106	51.71	
No. 200	0.075	45.86	
	0.0474	37.30	
	0.0339	33.08	
	0.0217	28.86	
щ	0.0173	26.75	
	0.0127	24.64	
WO	0.0090	22.53	
HYDROMETER	0.0064	20.42	
L Í	0.0046	18.31	
	0.0032	16.20	
	0.0023	14.09	*
	0.0013	11.98	

Test Results					
Cobbles	Gravel	Sand	Silt	Clay	
(75-300mm)	(4.75-75mm)	(0.075-4.75mm)	0.002-0.075mm	<0.002mm	
0.0	0.0	54.1	31.8	14.1	

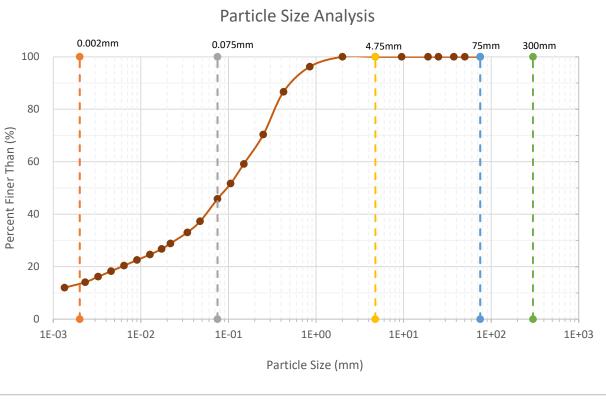

*Note: Criteria for clay is based on D7928; sieve sequence is based on D6913.



GEOTECHNICAL & MATERIAL TESTING LABORATORY

 Project Info:
 21.2311.002 / Drumheller Dike D


 Client:
 Sweet Tech Eng.

 Solum Job No.:
 09401210322(46)

 Sample Info:
 BH-07 07-06

SIEVE SIZE	PARTICLE- SIZE (mm)	PERCENT FINER (%)	
	300.000	100.00	
3"	75.000	100.00	
2"	50.000	100.00	
1.5"	37.500	100.00	
1"	25.000	100.00	
0.75"	19.000	100.00	
0.375"	9.500	100.00	
No. 4	4.750	100.00	
No. 10	2.000	100.00	
No. 20	0.850	99.56	
No. 40	0.425	97.28	
No. 60	0.250	92.07	
No. 100	0.150	88.48	
No. 140	0.106	84.53	
No. 200	0.075	78.15	
	0.0442	60.29	
	0.0320	53.76	
	0.0208	45.04	
Ĕ	0.0166	40.69	
HYDROMETER	0.0123	36.33	
WO	0.0089	29.80	
ADR.	0.0063	25.44	
É É	0.0045	23.26	
	0.0032	21.08	
	0.0023	18.91	*N
	0.0013	16.73	

	Т	est Results		
Cobbles	Gravel	Sand	Silt	Clay
(75-300mm)	(4.75-75mm)	(0.075-4.75mm)	0.002-0.075mm	<0.002mm
0.0	0.0	21.8	59.2	19.0

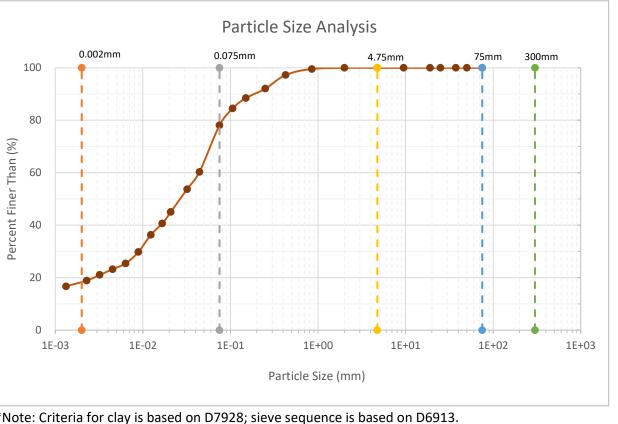



Unconfined Compression Test (ASTM D2166)

GEOTECHNICAL & MATERIAL TESTING LABORATORY


Project Info:	21.2311.002	/ Drumheller D	Dike D					
Client:	Sweet Tech E	ng.						
Solum Job No.:	0940121032.	2(46)						
Sample Info:	BH3 U1	5.0-5.6 m						
Diameter (cm)	6.00	Height (cm)	14.53	H/D Ratio	2.42	Mass (g)	798.4	Shear Rate (mm/min)
Sample Area (cm^2)		Assumed Gs	2.70	Initial Void Ratio	0.71	Initial Sat. Degree (%)	88.4	
MC (%)	23.4	Wet BD (kg/m^3)	1943	Dry BD (kg/m^3)	1575			
Vert. Displ. (cm)	Load Cell (kN)	ε1	Corrected Area (cm ²)	σ1 (kPa)	σ1/2 (kPa)	Test R	esults	
0.00	0.05	0.00	28.27	0.00	0.00			
0.08	0.09	0.52	28.42	12.81	6.40	UCS q _u (kPa)	145.03	
0.15	0.11	1.05	28.57	21.73	10.86	-		-
0.30	0.18	2.10	28.88	43.99	22.00	Shear Strength S_u (kPa)	72.52	
0.46	0.23	3.14	29.19	62.38	31.19	-		-
0.61	0.31	4.20	29.52	86.62	43.31	Axial Fal. Strain (%)	9.45	
0.76	0.36	5.25	29.84	104.53	52.26	-		-
0.92	0.42	6.30	30.18	120.56	60.28	Failure Mode	Shear	
1.07	0.46	7.35	30.52	132.66	66.33	-		
1.37	0.51	9.45	31.22	145.03	72.52	$\beta = 45^0 + \frac{\varphi}{2}$	~ 65°	B
1.68	0.46	11.54	31.96	127.85	63.93	2 -		
1.90	0.41	13.11	32.54	110.16	55.08			
2.15	0.39	14.77	33.17	101.64	50.82			



Unconfined Compression Test (ASTM D2166)

GEOTECHNICAL & MATERIAL TESTING LABORATORY

Project Info:	21.2311.002 / Drumheller Dike D
Client:	Sweet Tech Eng.
Solum Job No.:	09401210322(46)

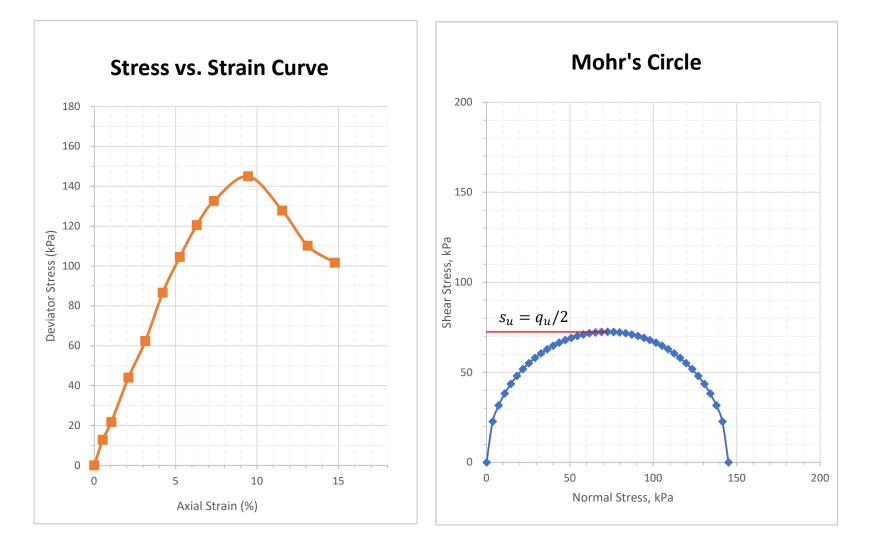



GEOTECHNICAL & MATERIAL TESTING LABORATORY

STANDARD LABORATORY TERMS AND CONDITIONS

1.0 Description of Services to be Performed by Solum Consultants Ltd. (Solum)

Solum shall provide geotechnical and material laboratory testing services on samples in accordance with these terms and conditions and executed Laboratory Testing Request Forms. Solum shall perform its work in accordance with accepted laboratory standards and accepted standard operating procedures. Solum reserves the right to modify methods as necessary based upon experience and/or current scientific literature. If the Client requests a manner of analysis that varies from standard operating or recommended procedures, the Client shall not hold Solum responsible for the results. Such variations of analysis will be noted on the reports. Solum reserves the right to subcontract laboratory testing if a particular test cannot be performed by Solum.

2.0 Reports, Confidentiality and Third Parties

Laboratory reports provided by Solum will be composed of a cover page, tables and figures if applicable. Reports will be e-mailed in PDF format to the individual(s) specified on the Laboratory Testing Request Forms. Laboratory reports may also be faxed or mailed to the Client upon request. Except as required by law, Solum shall not disclose testing results or reports to any party other than the Client, unless the Client, in writing, requests information to be provided to a third party. Solum shall abide by any additional confidentiality requirements requested by the Client provided that such requirements are provided to Solum at or before execution of the testing.

Information provided by Solum is intended for Client use only. Any use by a third party, of reports or documents authored by Solum, or any reliance on or decisions made by a third party based on the findings described in said documents, are the sole responsibility of such third parities, and Solum accepts no responsibility of damages suffered by any third party as a result of decisions made or actions conducted.

3.0 Laboratory Testing Request Form (Chain of Custody)

The laboratory testing request form must be completed by the Client and be accompanied with the samples. Other form of COC may be accepted; however, the condition of Solum COC is still applied. Testing will not commence until the laboratory testing request form has been completed. If requested by the Client, Solum shall provide a copy of the laboratory testing request form with the report.

No persons other than the designated representatives for each Laboratory Testing Request Form are authorized to act regarding changes to the testing request form. Any changes or amendments of the laboratory testing request form must be in writing and be completed by the originator.

4.0 Acceptance, Contamination and Disposal of Samples

Loss or damages to samples remains the responsibility of the Client until Solum representatives acceptance of samples by notation on the laboratory testing request form.

As to any samples that are suspected of containing hazardous substances, the Client will specify the suspected or known substance and level of contamination. This information is to be stated on the laboratory testing request form and be accompanied with the samples before testing can commence. Solum may refuse acceptance of samples if it determines they present a risk to health and safety.

Samples accepted by Solum shall remain the property and liability of the Client while in the custody of Solum. Solum will discard all non-contaminated samples after two weeks of submitting lab report or a month from the date of receiving the samples without additional retention period at a fixed disposal charge, or if requested by the Client, samples may be returned to the Client at no cost to Solum. If requested by client, Solum will store samples provided the client agrees to pay for the storage charge. Contaminated material may be returned/shipped to the Client at the Client's expense or Solum will discard samples with disposal rates varying for samples containing higher levels of contamination, refer to price list.

Soil samples requested to be stored will be stored inside the lab up to the expiration of storage period. Soil samples will be discarded upon the expiration date of the storage period unless client requests either extending storage period or return samples back to client at no cost to Solum.

5.0 Indemnification/Hold Harmless

Solum shall protect, indemnify and save harmless Client, and its directors, officers, employees, agents, representatives, invitees and subcontractors, and at Client's request, investigate and defend such entities form and against all claims, demands and causes of action, of every kind and character, without limitation, arising in favour of or made by third parties, on account of bodily injury, death or damage to or loss of their property resulting from any negligent act or wilful misconduct of Solum.

The Client shall protect, indemnify and save harmless Solum, and its directors, officers, employees, agents, representatives, invitees and subcontractors, and at Solum's request, investigate and defend such entities form and against all claims, demands and causes of action, of every kind and character, without limitation, arising in favour of or made by third parties, on account of bodily injury, death or damage to or loss of their property resulting from any negligent act or wilful misconduct of Client.

6.0 Limitation of Liability

The total liability of Solum or its staff whether based in contract or tort, will be limited to the lesser of the fees paid or actual damages incurred by the Client. Solum will not be responsible for any consequential or indirect damages even if caused by negligence of Solum. Solum will only be liable for damages resulting form negligence of Solum. All claims by the Client shall be deemed relinquished if not made within one year after the testing date. No warranty is either expressed or implied, or intended by any agreement or by furnishing oral or written reports or findings.

7.0 Termination of Testing Work Order

The Client may order work suspended or terminated upon seven days advance written notice. If work is suspended, Solum shall receive, upon resumption, an adjustment in the cost of services to compensate for additional costs incurred due to the interruption of services. Upon suspension or termination, Solum shall preserve samples provided that the Client agrees to pay the sample storage charge.


8.0 Pricing, Payments and Invoicing


Invoices will be based on most current Solum laboratory testing rates; rates may change without notice. Solum invoices shall be paid within thirty (30) days of receipt of the invoice. Amounts not paid when due shall bear interest at the rate of 18% per annum from the date due until the date of payment.




DRFM DIKE D – GEOTECHNICAL INVESTIGATION REPORT


Appendix 4: Stability and Seepage Analysis

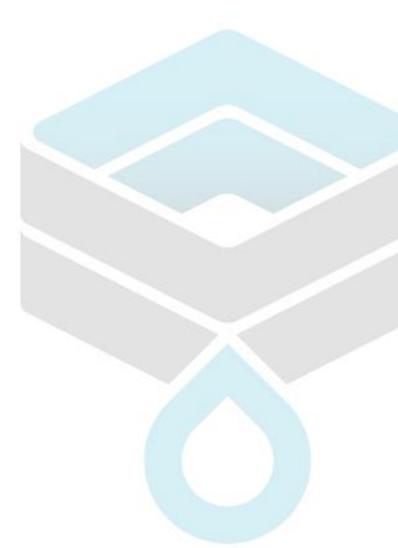


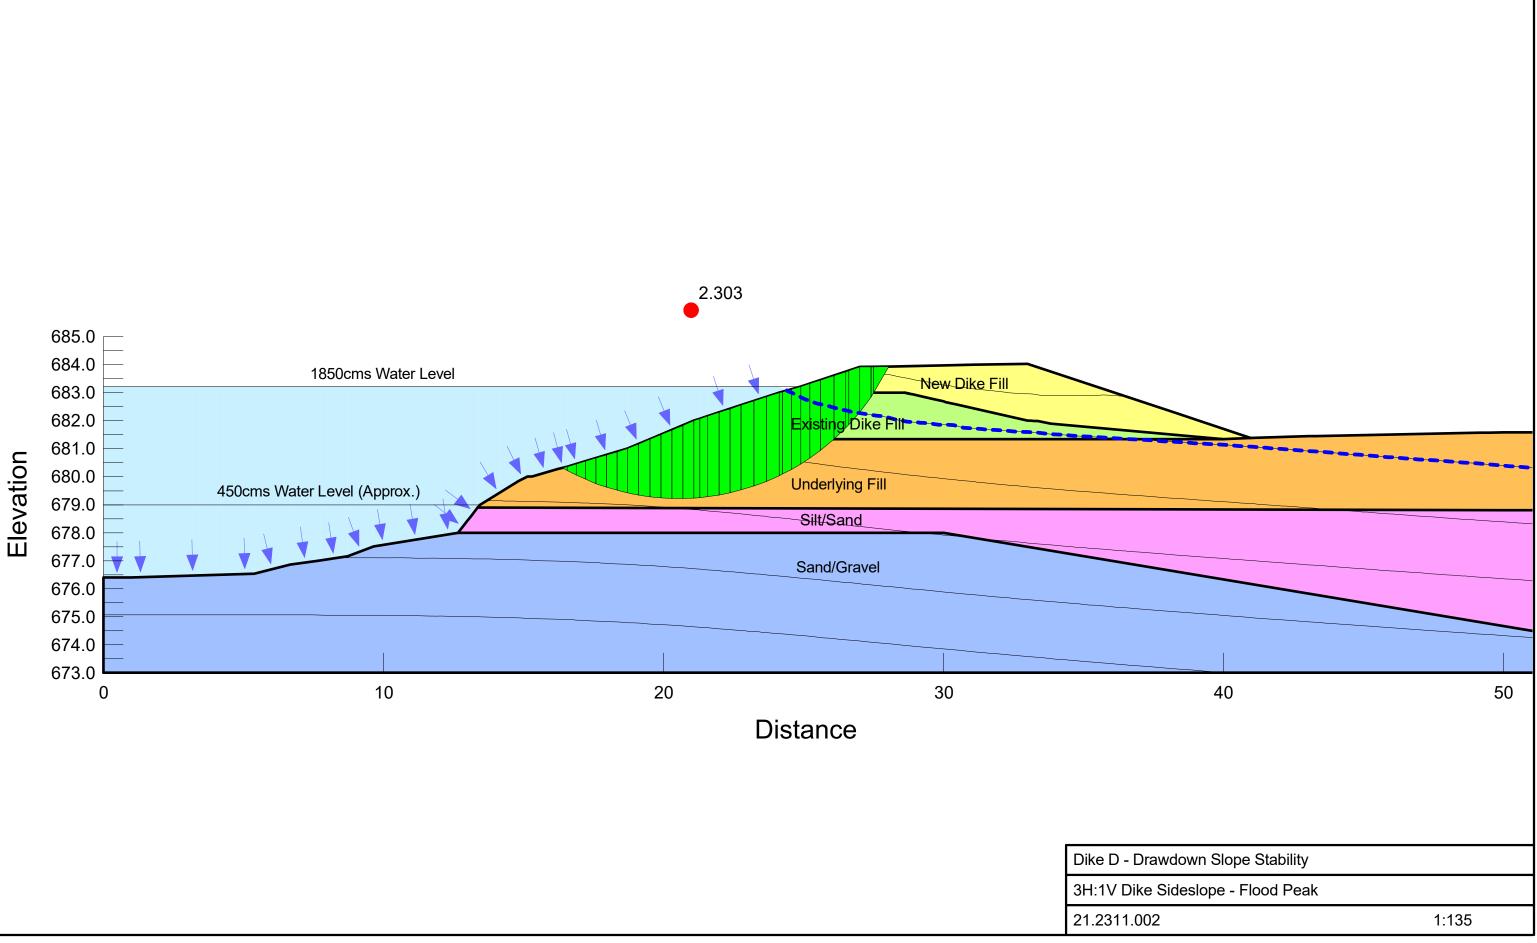



Dike D - Dra
3H:1V Dike
21.2311.00

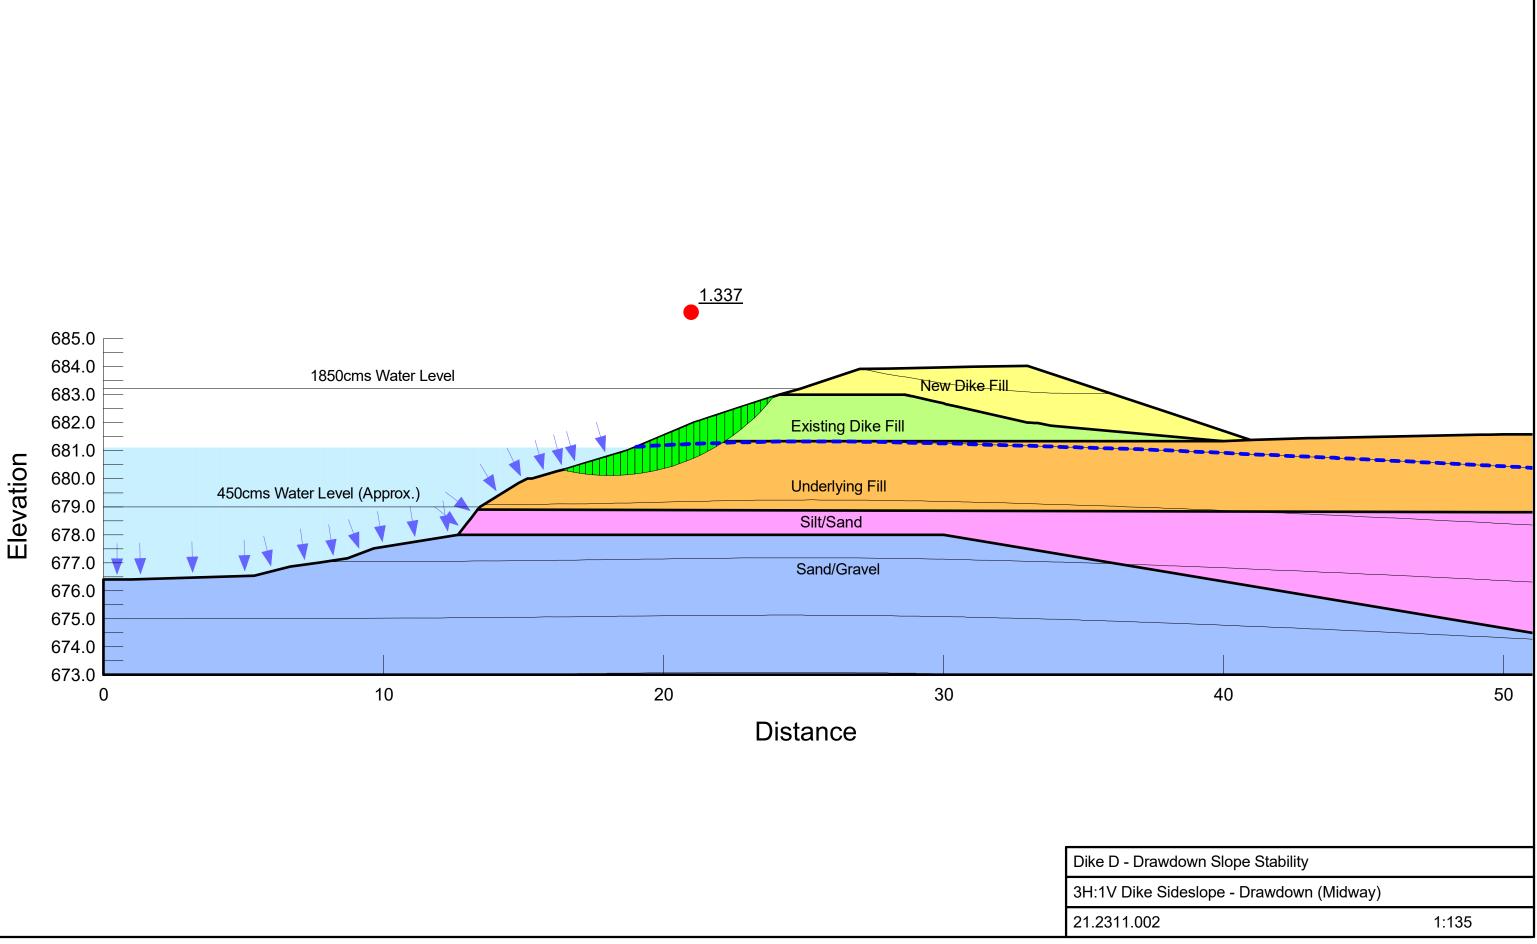


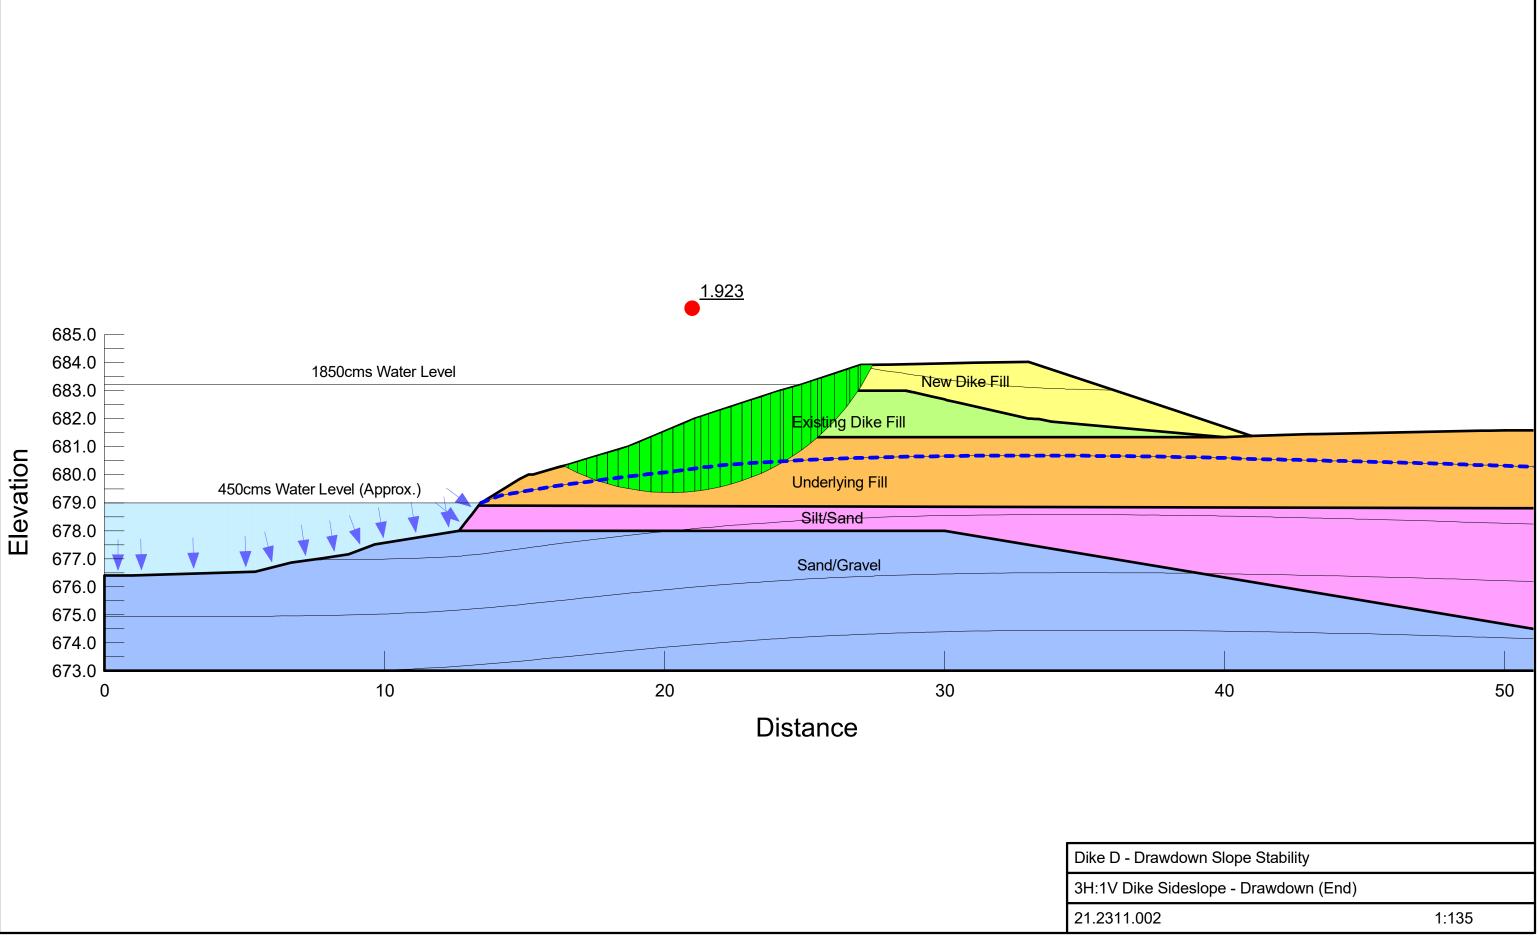


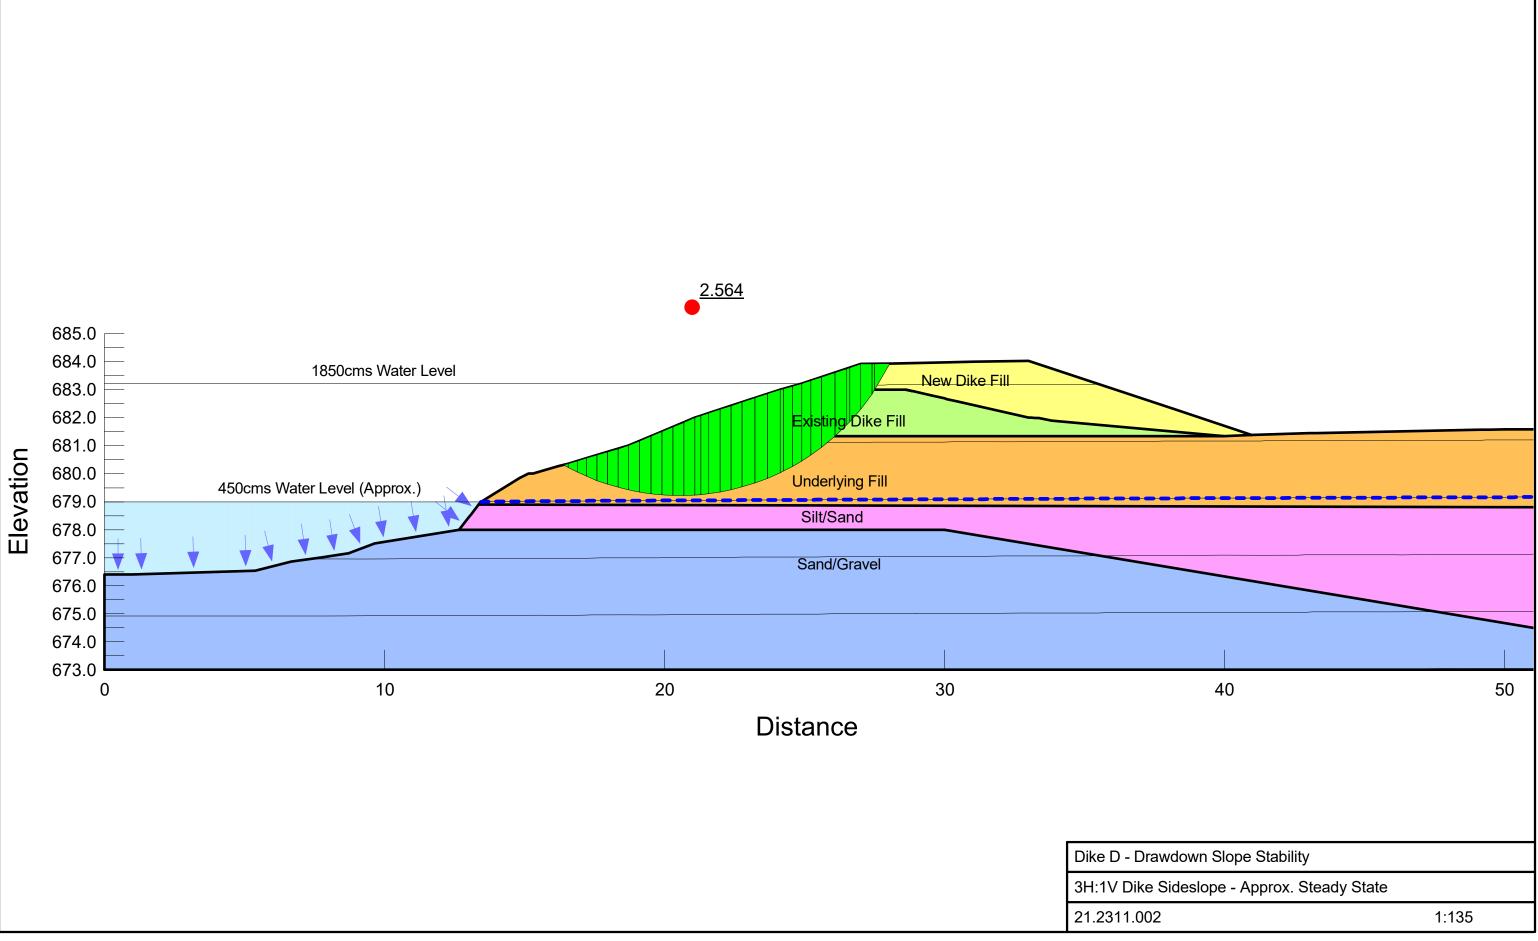


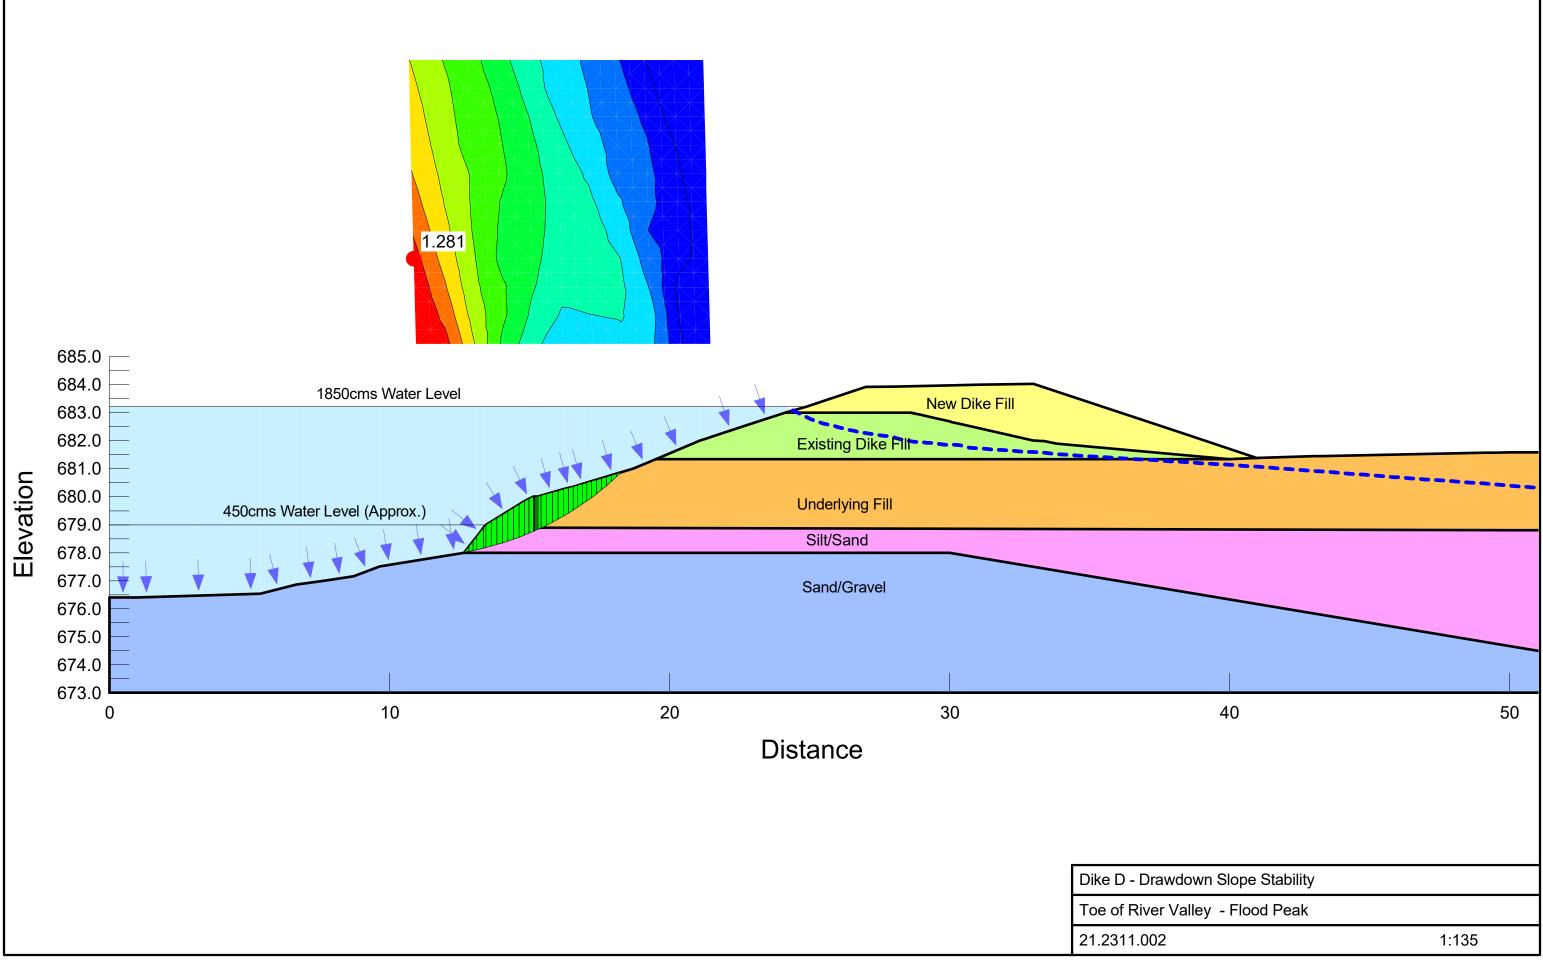

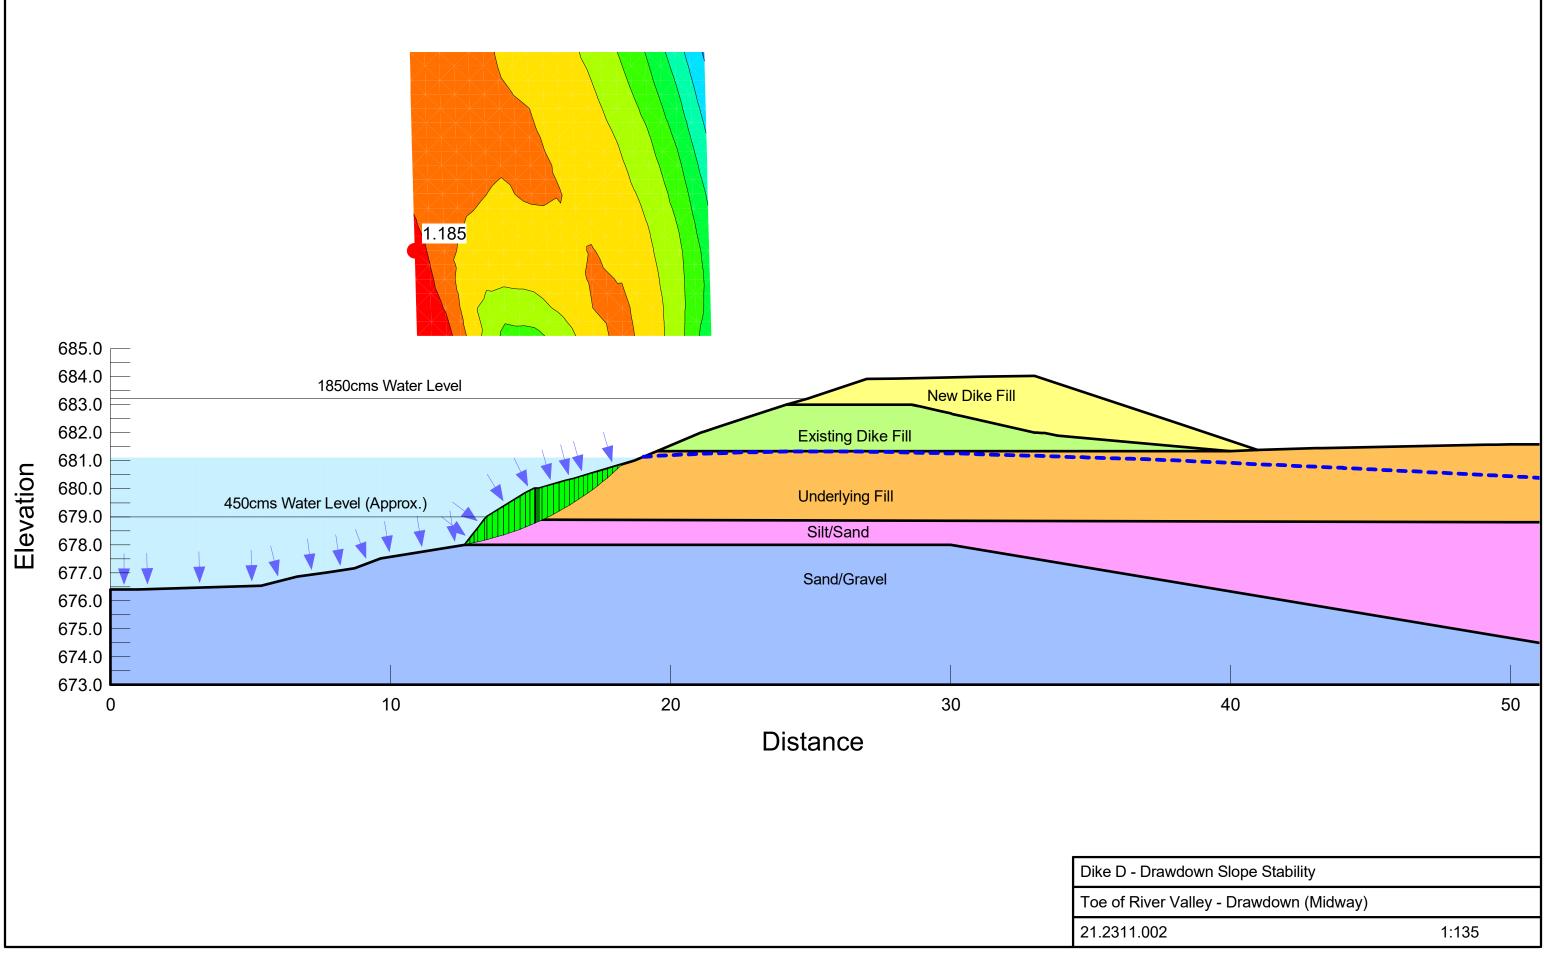


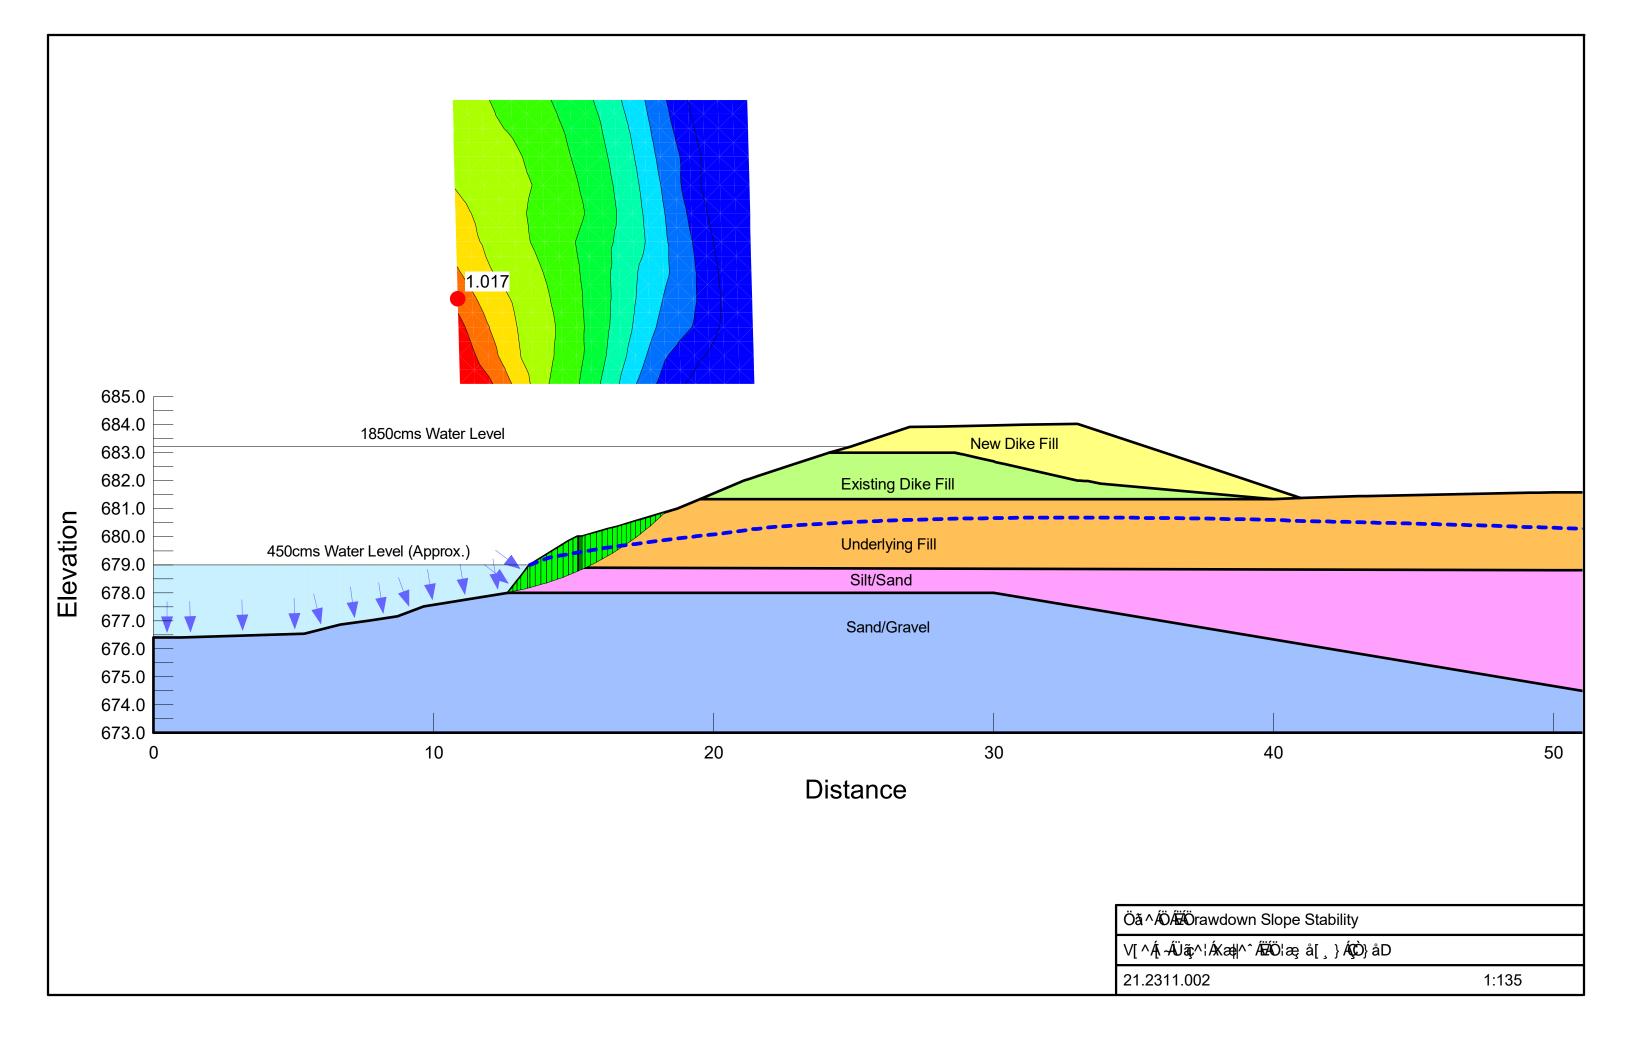


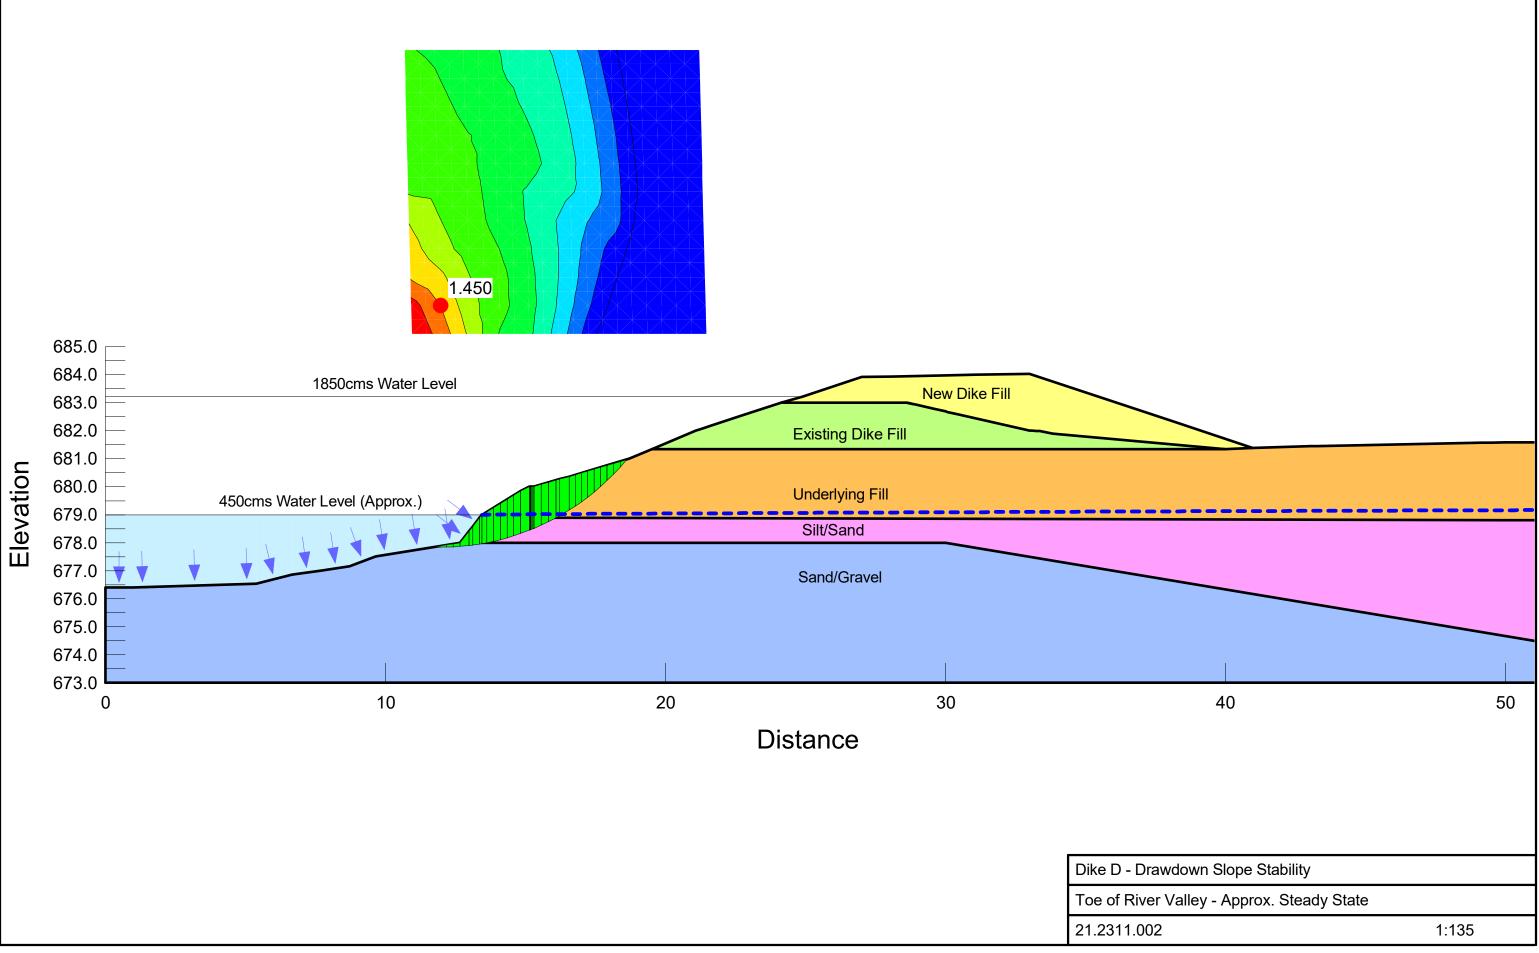

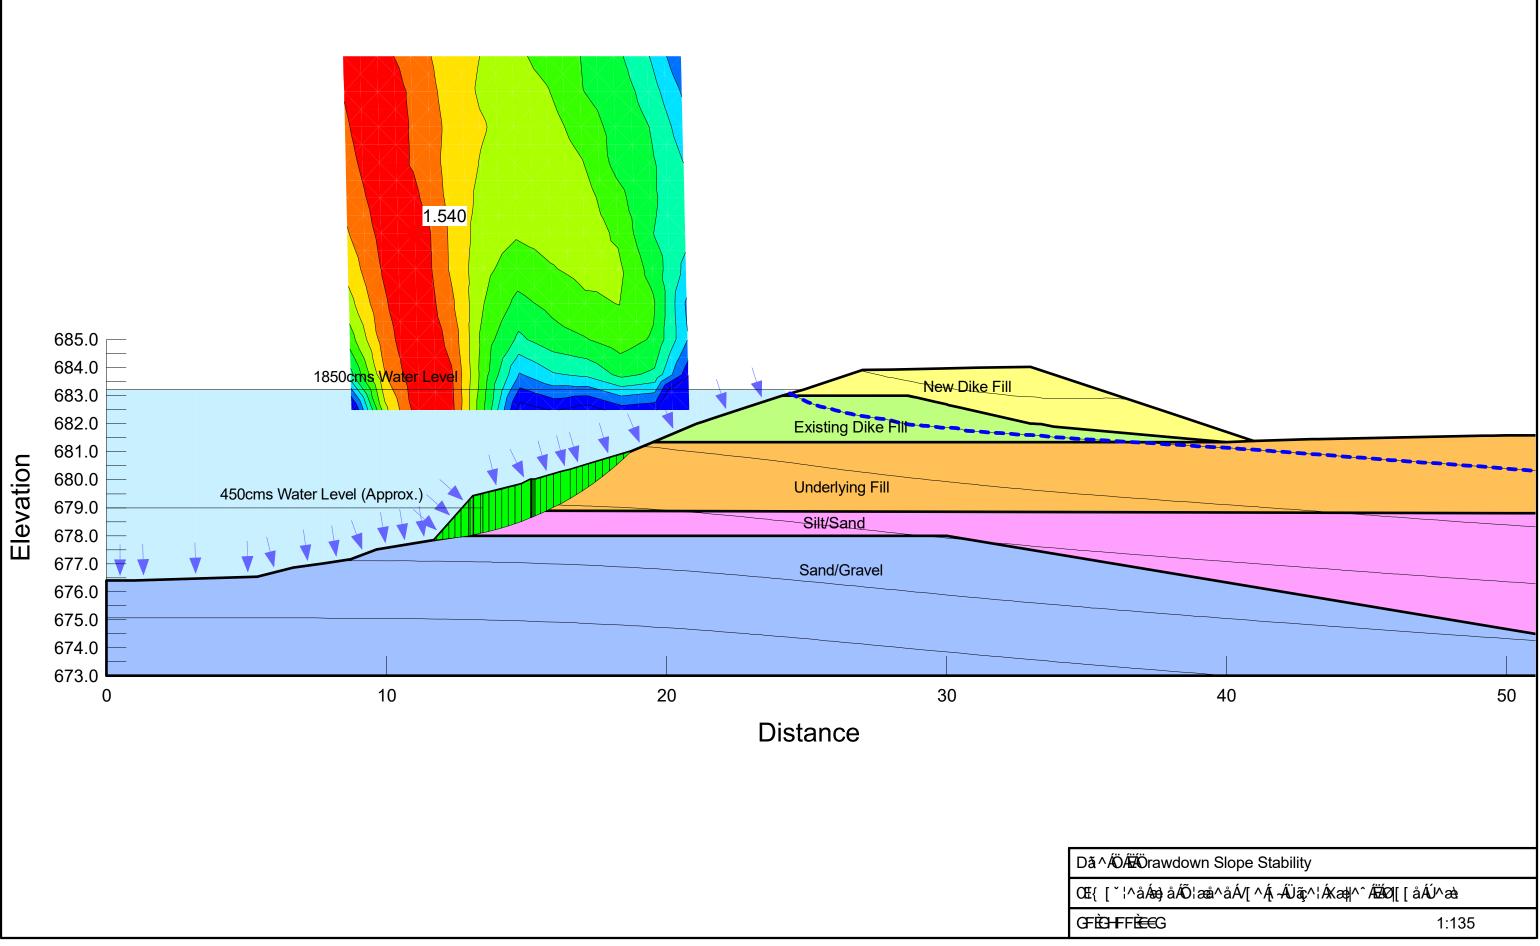

Dã^⁄ÄÖÆÖr
Œ{[`¦^åÁ
GFÈG ⊢ FFÈ€€

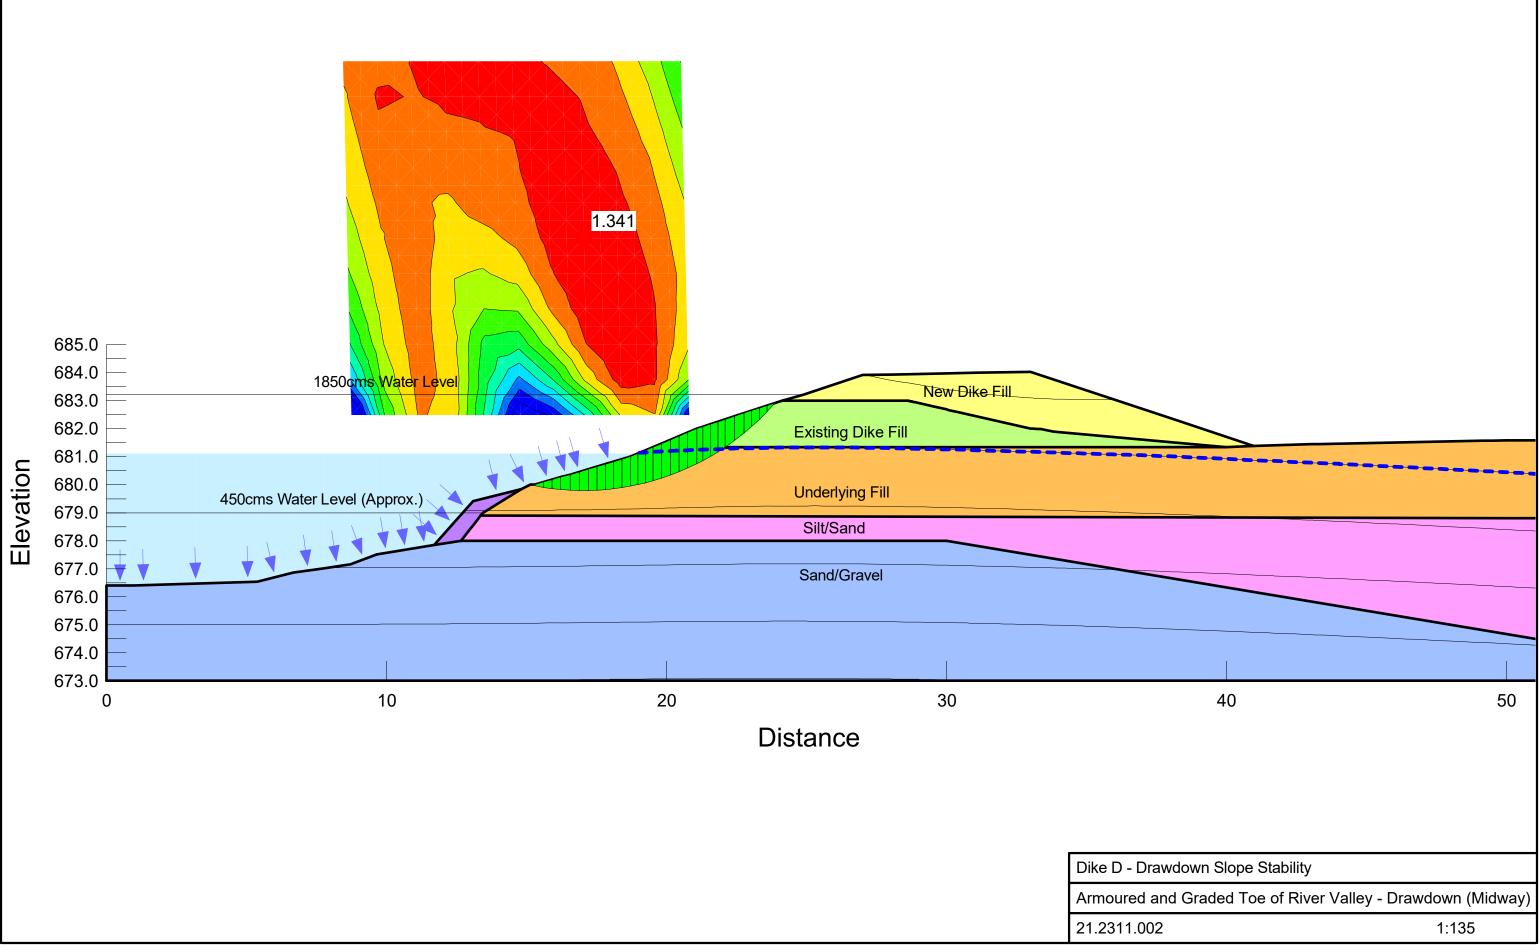

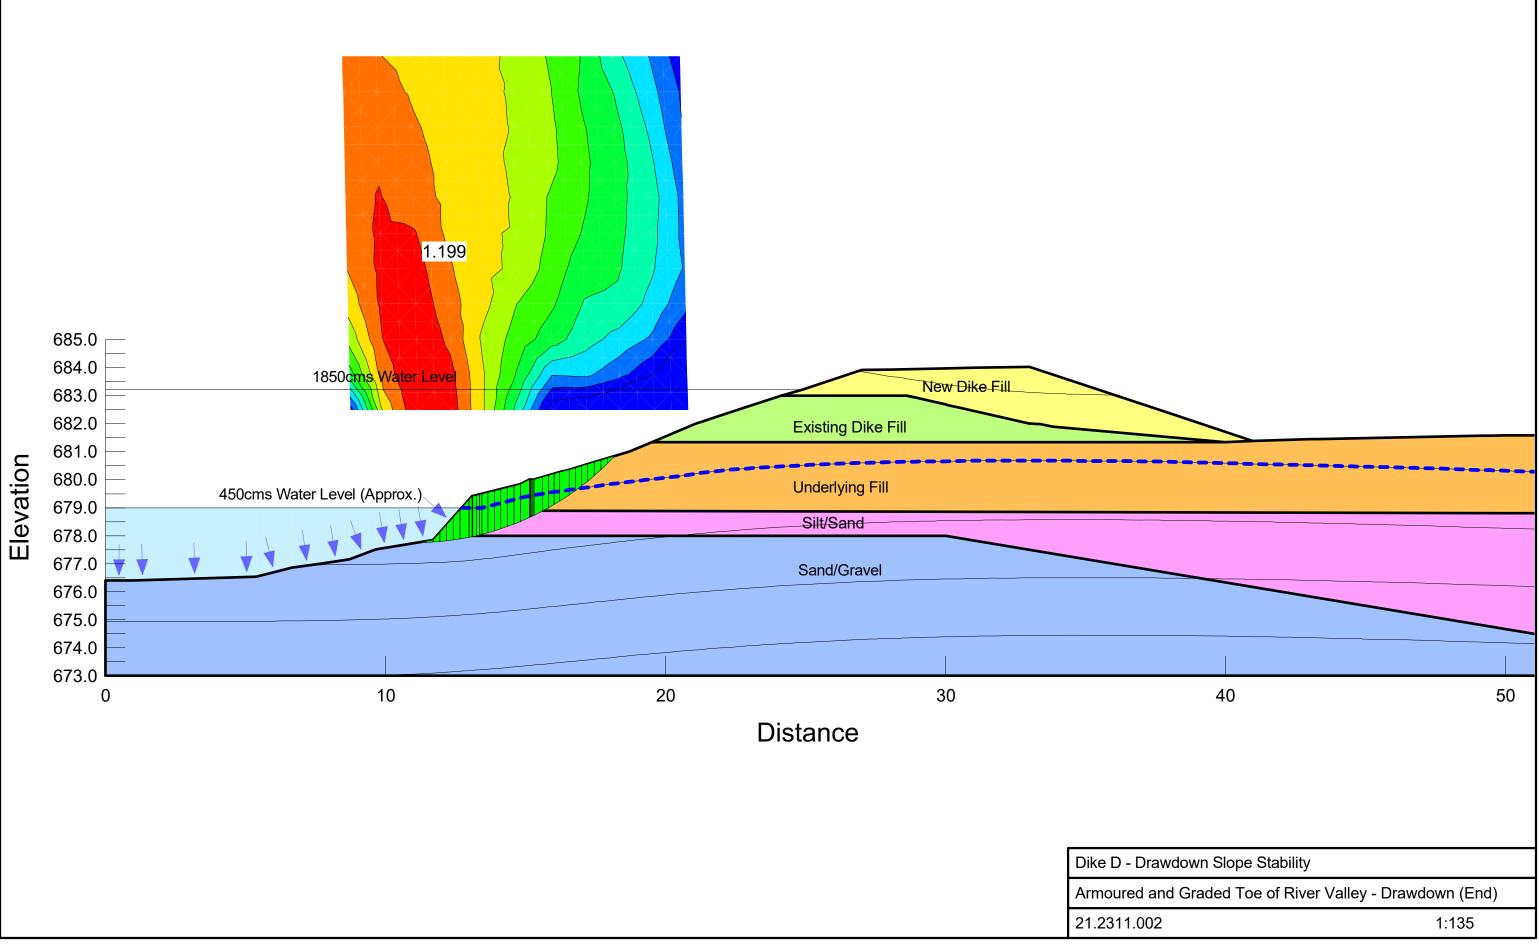

Dike D - Dra
Armoured a
21.2311.00

