

TENDER DOCUMENTS ADDENDUM

PROJECT: Drumheller Memorial Arena – Dressing Room Addition
ADDENDUM NUMBER: 3
DATE: April 12, 2023
NUMBER OF PAGES: 2

This addendum forms part of the Bid and Contract Documents and modifies them as follows:

GENERAL:

- Attached is the sign-in sheet from the Mandatory Site Meeting.
- Attachments referred to in Addendum #2 were not properly attached. They have been included in this addendum.

SPECIFICATIONS:

- Refer to Section 00 21 13 Instructions to Bidders, 2.1 Bid Submission. The bid closing date has been extended to **2:00 pm, Thursday, April 20, 2023.**

DRAWINGS:

- Refer to Pile Schedule on drawing S2.0. Replace the existing schedule with the schedule below:

(P) PILE SCHEDULE					
MARK	SHAFT DIAMETER	SHAFT REINFORCEMENT	TIES	PILE LENGTH (m)	T/O PILE ELEVATION (mm)
P1	508	(6)-15M	(3)-10M @ 50 O/C TOP & BOTTOM REST: 10M @ 400 O/C	6.0	99205
P1a	508	(6)-15M	(3)-10M @ 50 O/C TOP & BOTTOM REST: 10M @ 400 O/C	7.0	100105
P1b	508	(6)-15M	(3)-10M @ 50 O/C TOP & BOTTOM REST: 10M @ 400 O/C	6.0	98888
P2	508	(6)-15M	(3)-10M @ 50 O/C TOP & BOTTOM REST: 10M @ 400 O/C	9.0	99205
P2a	508	(6)-15M	(3)-10M @ 50 O/C TOP & BOTTOM REST: 10M @ 400 O/C	10.0	100105
P3	610	(8)-15M	(3)-10M @ 50 O/C TOP & BOTTOM REST: 10M @ 400 O/C	10.0	99205
P4	610	(8)-15M	(3)-10M @ 50 O/C TOP & BOTTOM REST: 10M @ 400 O/C	12	99205

PILE DESIGN IS BASED ON GEOTECHNICAL INVESTIGATION OF THE PROPOSED DRUMHELLER CURLING CLUB LOCATED ACROSS THE PROPERTY.

5. Refer to drawing E2.0. Add the following General Note:

1. *Except light fixture types B & C, all surface mount and suspended light fixtures, emergency battery units and remote heads provided under this contract shall be provided with wire guards.*

ATTACHMENTS:

Sign-in sheets (2 pages) from Mandatory Site Meeting
Fire Alarm Annual Test and Inspection, dated August 24, 2022.
Sprinkler System Annual Inspection, dated August 24, 2022.
Geotechnical Investigation Report, dated July 9, 2019, for the area adjacent to the arena
Laboratory Testing Results, dated February 21, 2019, for the area adjacent to the arena

END OF ADDENDUM #3

We hereby acknowledge receipt of the amended instructions and/or revisions as noted in Addendum #3 and accept these modifications as being part of the contract documents.

Contractor: _____

Contractor's Representative: _____

Representatives Signature: _____

Witness: _____

Witness' Signature: _____

Date: _____

NOTE: A SIGNED COPY OF THIS AMMENDMENT MUST BE RETURNED TO THE CONSULTANT PROMPTLY AFTER IT HAS BEEN RECEIVED.



**Town of Drumheller
Drumheller Memorial Arena – Dressing Room Addition**

DATE: April 11, 2023

TIME: 11:00am

LOCATION: On Site

TYPE OF MEETING	Mandatory Pre-Bid Site Meeting			
FACILITATOR				
ATTENDEES	Name	Company	Phone	Email
	Lynn Molnar	Russpat Construction	587-891-9370	lynn@russpat.com
	Dennis Lawrence	Lawrence Masonry	403-874-3882	Dennis@lawrencemasonry.ca
	Peter Poduner	Black-Tech Inc.	403-877-5301	peter@blacktechindustries.com
	John Taylor	Jetaylor P/B	403 230 2336	info@Jetaylor.ca
	Guy Amabile	PROLOGIC CONSTRUCTION	780-932-7393 ALAN	ESTIMATE@PROLOGICCONSTRUCTION.CA
	George Kang	A&M Demolition/Abatement	403-703-0483	george@amabatement.com
	Sean Krown	Wildrose Drywall	403 620 8551	sean@wildrosedrywall.ca
	CYRIL SVET	SVEMY CONSTRUCTION	403 369 1985	CYRIL@SVEMY.COM
	Kent Chuteleigh	ARMOR BUILDING DEV	403-362-6637	Kent@ARMORBUILDING.CA
Daniel Scheers	UniWorld Services and Demolition	403 863 7773	info@uniworldservicesanddemolition.ca	



**Town of Drumheller
Drumheller Memorial Arena – Dressing Room Addition**

DATE: April 11, 2023

TIME: 11:00am

LOCATION: On Site

TYPE OF MEETING	Mandatory Pre-Bid Site Meeting			
FACILITATOR				
	Name	Company	Phone	Email
ATTENDEES	Colton Kwon	Pure Electrical	587-948-3198	Kwonpk@aol.com
	MIKE DAVISON	J.C MASTER CONTRACTING	403-471-8084	CHAD@CMASTERCONTRACTING.COM
	Michael Staines	CHANDOS	403-473-5785	mstaines@chandos.com
	Patrick Madden	BEAUVIA CONST.	403 588 1719	patrick@beaviacost.com
	Jim Bonora	MARIO'S ELECTRIC	403-633-0234	MARIOSELECTRIC2@HOTMAIL.COM
	Shane Morelli	M.M. ELECTRIC	403-823-2065	mmelect@telus.net
	Ken BROWN	Masonry	483 3348977	kibrown@hotmail.com
	Joseph Ramirez	BRENEX	780-467-8784	joroknr@BRENEX.com
	Michael Perochio	Everest	403 685 6609	Estimating@everestconstruction.ca



BUILDING NAME:	MEMORIAL ARENA DRUMHELLER		
BUILDING ADDRESS:	20 1 Avenue West, Drumheller, AB, T0J 0Y2		
DATE:	08/24/2022		
MANUFACTURER:	Simplex	MODEL NUMBER:	Simplex 4010
SR#:	51538586	SITE CONTACT:	Reg Bennet

C1. FIRE ALARM SYSTEM ANNUAL TEST AND INSPECTION

(Reference 6.1.1)

YES	NO	N/A
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
PLEASE SEE REMARKS		
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

- A. System provides single-stage operation.
- B. System provides two-stage operation.
- C. The entire fire alarm system has been inspected and tested in accordance with CAN/ULC-S536-13, Inspection and Testing of Fire Alarm Systems.
- D. The fire alarm system documentation is on site and includes a description of the system.
- E. The fire alarm system is fully functional.
- F. The Fire Alarm system has deficiencies noted on the pages attached.
- G. Comments
- H. A copy of this report will be given to the following, who is the owner or owner's representative of this building:
Jason Rafter 403-820-0502

This is to certify that the information contained in this Fire Alarm System Annual Test and Inspection Report is correct and complete.

<p>Tomas Petrik Printed name of the primary or supervising technician conducting the Test and Inspection</p> <p style="text-align: center;"><i>Tomas Petrik</i></p> <p>Signature of the primary or supervising technician conducting the Test and Inspection</p>	<p>Johnson Controls North America Company</p> <p>CFAA - 11-998284 FULLY CERTIFIED Identification # of the primary or supervising technician conducting the Test and Inspection</p>	<p>403-287-3202 Telephone</p>
<p>Jonathan Vidallo Printed name of the assisting technician conducting the Test and Inspection</p> <p style="text-align: center;"><i>Jonathan Vidallo</i></p> <p>Signature of the assisting technician conducting the Test and Inspection</p>	<p>Johnson Controls Company</p> <p>21495 Identification # of the assisting technician conducting the Test and Inspection</p>	<p>403-287-3202 Telephone</p>

This certifies that the information contained in this Fire Alarm Inspection Report is correct and complete. The system and equipment described here-in was tested/inspected in conformance with CAN/ULC-S536-13 by a qualified technician. The equipment was left in an operational condition except as noted above. A copy of this report must be maintained on the premises for examination by the Fire Marshal, Building Inspector, or other Authority Having Jurisdiction at their request. This record is to be maintained by the building owner.

BUILDING NAME:	MEMORIAL ARENA DRUMHELLER		
BUILDING ADDRESS:	20 1 Avenue West, Drumheller, AB, T0J 0Y2		
DATE:	08/24/2022		
MANUFACTURER:	Simplex	MODEL NUMBER:	Simplex 4010
SR#:	51538586	SITE CONTACT:	Reg Bennet

C2. CONTROL UNIT OR TRANSPONDER TEST RECORD

YES= Tested Correctly NO= Did Not Test Correctly N/A= Not Applicable
(Refer to remarks, C2.12)

C2.1 Control Unit or Transponder Test

(Reference: Clauses 6.1.3, 6.2.2.1)

Control Unit or Transponder Location: Main entrance
Control Unit or Transponder Identification: FACP

	YES	NO	N/A
A. Power "on" visual indicator operates.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
B. Common visual trouble signal operates.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
C. Common audible trouble signal operates.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
D. Trouble signal silence switch operates.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
E. Main power supply failure trouble signal operates.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
F. Ground fault tested on positive and negative initiates troubles signal.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
G. Alert signal operates.	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
H. Alarm signal operates.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
I. Automatic transfer from alert signal to alarm signal operates (Auto EVAC)	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
J. Manual transfer from alert signal to alarm signal operates- (Total EVAC)	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
K. Automatic transfer from alert signal to alarm signal cancel (acknowledge) feature operates on a two-stage system.	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
L. Alarm signal silence inhibit function operates.	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
M. Alarm signal manual silence operates.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
N. Alarm signal silence visual indication operates.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
O. Alarm signals, when silenced, automatically reinitiates upon subsequent alarms.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
P. Alarm signal silence automatic cut-out timer.	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Q. Audible and visual alert signals and alarm signals programmed and operate per design and specification; or documentation as detailed in Appendix E, Description of Fire Alarm System for Inspection and Test Procedures.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
R. Input circuit, alarm and supervisory operation, including audible and visual indicator operates.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
S. Input circuit supervision fault causes a trouble indication.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
T. Output circuit alarm indicators operate.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
U. Output circuit supervision fault causes a trouble indication.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
V. Visual indicator test (Lamp Test).	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
W. Coded signal sequences operate not less than the required number of times and the correct alarm signal operates thereafter.	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Time: N/A

BUILDING NAME:	MEMORIAL ARENA DRUMHELLER		
BUILDING ADDRESS:	20 1 Avenue West, Drumheller, AB, T0J 0Y2		
DATE:	08/24/2022		
MANUFACTURER:	Simplex	MODEL NUMBER:	Simplex 4010
SR#:	51538586	SITE CONTACT:	Reg Bennet

X. Coded signal sequences are not interrupted by subsequent alarms.

		✓
--	--	---

Y. Ancillary device by-pass will result in a trouble signal.

✓		
---	--	--

Z. Input circuit to output circuit operation, including ancillary device circuits, for connect program operation, as per design and specification, or documentation as detailed in Appendix C, Description of Fire Alarm System for Inspection and Test Procedures.

✓		
---	--	--

AA. Fire alarm system reset operates.

✓		
---	--	--

BB. Main power supply to emergency power supply transfer operates.

✓		
---	--	--

CC. Smoke detector alarm verification (status change confirmation) verified. [Refer Subsection 6.7.4.3, Smoke Detector Alarm Verification (Status Change Confirmation)].

		✓
--	--	---

BUILDING NAME:	MEMORIAL ARENA DRUMHELLER		
BUILDING ADDRESS:	20 1 Avenue West, Drumheller, AB, T0J 0Y2		
DATE:	08/24/2022		
MANUFACTURER:	Simplex	MODEL NUMBER:	Simplex 4010
SR#:	51538586	SITE CONTACT:	Reg Bennet

C2.2 Voice Communication Test

(Reference: Clauses 6.1.3, 6.2.3.1)

Indicate with an 'N/A' if there is no voice communication system included with this report: N/A

Control Unit or Transponder Location: _____ N/A

Control Unit or Transponder Identification: _____ N/A

	YES	NO	N/A
A. Power 'ON' indicator operates.			✓
B. Common visual trouble signal operates.			✓
C. Common audible trouble signal operates.			✓
D. Trouble signal silence switch operates.			✓
E. All-Call voice paging, including visual indicator, operates.			✓
F. Output circuits for selective voice paging, including visual indicator, operates.			✓
G. Output circuits for selective voice paging trouble operation, including visual indicator, operates.			✓
H. Microphone, including push to talk switch, operates.			✓
I. Operation of voice paging does not interfere with initial inhibit time of alert signal or alarm signal.			✓
J. All-Call voice paging operates (on emergency power supply).			✓
K. Where systems use back-up amplifiers, the automatic transfer feature operates.			✓
L. Circuits for emergency telephone call-in operation, including audible and visual indication, operates.			✓
M. Circuits for emergency telephones for operation, including two-way voice communication, operates.			✓
N. Circuits for emergency telephone trouble operation, including visual indication, operates.			✓
O. Emergency telephone verbal communication operates.			✓
P. Emergency telephone operable or in-use tone at handset operates.			✓
Q. While in standby mode, voice communication busses used for paging, alert signal, alarm signal, and emergency telephone communication circuits, an open circuit fault, or short circuit fault, or operation of an overcurrent protective device provided for the purpose, shall result in a specific trouble indication specific to the faulty buss.			✓

BUILDING NAME:	MEMORIAL ARENA DRUMHELLER		
BUILDING ADDRESS:	20 1 Avenue West, Drumheller, AB, T0J 0Y2		
DATE:	08/24/2022		
MANUFACTURER:	Simplex	MODEL NUMBER:	Simplex 4010
SR#:	51538586	SITE CONTACT:	Reg Bennet

C2.3 Control Unit or Transponder Inspection

(Reference: Clauses 6.1.3, 6.2.4.1)

Control Unit or Transponder Location: Main entrance
 Control Unit or Transponder Identification: FACP

	YES	NO	N/A
A. Input circuit designations correctly identified in relation to connected field devices.	✓		
B. Output circuit designations correctly identified in relation to connected field devices.	✓		
C. Correct designations for common control functions and indicators.	✓		
D. Plug-in components and modules securely in place.	✓		
E. Plug-in cables securely in place.	✓		
F. Record the date, revision, and version of the firmware and software program	Date: <u>12/13/2011</u> Rev: <u>REV 4.01.06</u> <u>JOB REV:1</u> Ver: <u>N/A</u>		
G. Clean and free of dust and dirt.	✓		
H. Fuses in accordance with manufacturer's specification.	✓		
I. Control unit / transponder lock functional.	✓		
J. Termination points from wiring to field devices secure.	✓		

BUILDING NAME:	MEMORIAL ARENA DRUMHELLER		
BUILDING ADDRESS:	20 1 Avenue West, Drumheller, AB, T0J 0Y2		
DATE:	08/24/2022		
MANUFACTURER:	Simplex	MODEL NUMBER:	Simplex 4010
SR#:	51538586	SITE CONTACT:	Reg Bennet

C2.4 Power Supply Inspection

(Reference: Clauses 6.1.3, 6.3.1)

Control Unit or Transponder Location:

MAIN ENTRANCE

Control Unit or Transponder Identification:

SIMPLEX 4010

YES	NO	N/A
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

A. Fused in accordance with the manufacturer's marked rating of the system.

B. Adequate to meet the requirements of the system.

C. Where power isolation modules are installed in a power distribution riser serving field devices, wiring shall be shorted on the isolated side, annunciation of the fault confirmed, and then a device on the source side shall be operated, and activation confirmed at the control unit or transponder.

BUILDING NAME:	MEMORIAL ARENA DRUMHELLER		
BUILDING ADDRESS:	20 1 Avenue West, Drumheller, AB, T0J 0Y2		
DATE:	08/24/2022		
MANUFACTURER:	Simplex	MODEL NUMBER:	Simplex 4010
SR#:	51538586	SITE CONTACT:	Reg Bennet

C2.5 Emergency Power Supply Test and Inspection

(Reference: Clauses 6.1.3, 6.3.2, 6.3.3)

Control Unit or Transponder Location: MAIN ENTRANCE
 Control Unit or Transponder Identification: SIMPLEX 4010
 Battery Size: 2x 12 Volt 12 Ah Stake On

YES	NO	N/A
-----	----	-----

- A. Correct Battery type as recommended by manufacturer.

✓		
---	--	--
- B. Correct battery rating as determined by battery calculations based on full system load.

✓		
---	--	--
- C. Battery Voltage with Main Power Supply on.
BATTERIES FAILED DUE TO 6 YEARS IN SERVICE

--	--	--

_____ Vdc
- D. Charging current on a fully charged battery.

--	--	--

_____ Amps
- E. Free of Physical damage.

✓		
---	--	--
- F. Battery voltage and current with main power supply 'OFF' and fire alarm system in supervisory condition.

--	--	--

_____ Vdc
 _____ Amps
- G. Battery voltage and current with main power supply 'OFF' and fire alarm system in full load alarm condition.

--	--	--

N/A Vdc
 _____ Amps
- H. Terminals cleaned and lubricated.

✓		
---	--	--
- I. Terminals clamped tightly.

✓		
---	--	--
- J. Correct electrolyte level.

		✓
--	--	---
- K. Specific gravity of electrolyte is within manufacturer's specifications.

		✓
--	--	---
- L. Free of Electrolyte leakage.

✓		
---	--	--
- M. Adequate ventilation.

✓		
---	--	--
- N. Battery manufacturer's date code or in-service date.
BATTERIES FAILED DUE TO 6 YEARS IN SERVICE

--	--	--

Date: 01/07/2016
- O. Disconnection causes a trouble indication.

✓		
---	--	--
- P. Record calculated battery capacity. (Refer to Appendix F4.1-C of ULC Standards)

	N/A	Ah
--	-----	----
- Q. Record battery terminal voltage after completion of tests.

	N/A	Vdc
--	-----	-----
- R. Indicate type of battery test performed.
 - i. Required supervisory load for 24 hours followed by the required full load operation.

	✓	
--	---	--
 - ii. A silent test by using the load resistor method may be used for the full duration test (Refer to appendix F1, Silent Test)

	✓	
--	---	--
 - iii. Silent accelerated test. (Refer to Appendix F2, Silent Accelerated Test)

	✓	
--	---	--
 - iv. A battery capacity meter test. (Refer to Appendix F3, Battery Capacity Meter Test)

		Not Answered
--	--	--------------
 - v. In lieu of the above battery tests, replace the battery with a new set having a current date code, amp hour capacity, and of a type as recommended by the manufacturer of the fire alarm system.

	✓	
--	---	--

BUILDING NAME:	MEMORIAL ARENA DRUMHELLER		
BUILDING ADDRESS:	20 1 Avenue West, Drumheller, AB, T0J 0Y2		
DATE:	08/24/2022		
MANUFACTURER:	Simplex	MODEL NUMBER:	Simplex 4010
SR#:	51538586	SITE CONTACT:	Reg Bennet

S. Battery voltage not less than 85% of its rating after the tests.

		✓
--	--	---

T. Generator provides power to the AC circuit serving the fire alarm system.

		✓
--	--	---

U. Trouble condition at the emergency generator shall result in an audible common trouble signal and a visual indication at the required annunciator.

		✓
--	--	---

BUILDING NAME:	MEMORIAL ARENA DRUMHELLER		
BUILDING ADDRESS:	20 1 Avenue West, Drumheller, AB, T0J 0Y2		
DATE:	08/24/2022		
MANUFACTURER:	Simplex	MODEL NUMBER:	Simplex 4010
SR#:	51538586	SITE CONTACT:	Reg Bennet

C2.6 Annunciator and Remote Trouble Signal Unit Test and Inspection

(Reference: Clauses 6.1.4, 6.4.1)

Annunciator or remote trouble signal unit location: _____ N/A
 Annunciator or remote trouble signal unit identification: _____ N/A

	YES	NO	N/A
A. Power 'ON' indicator operates.			✓
B. Individual alarm and supervisory input zone clearly indicated and separately designated.			✓
C. Individual alarm and supervisory input zone designation labels are properly identified.			✓
D. Where active and supporting field devices are utilized, device labels shall be confirmed to correspond with actual field location.			✓
E. Common trouble signal operates.			✓
F. Visual indicator test (lamp test) operates.			✓
G. Input wiring from control unit or transponder is supervised.			✓
H. Alarm signal silence visual indicator operates.			✓
I. Switches for ancillary functions operate as per design and specification, or in accordance with documentation as detailed in Appendix E, Description of Fire Alarm System for Inspection and Test Procedures.			✓
J. Other ancillary function visual indicators operate.			✓
K. Manual activation of alarm signal and indication operates.			✓
L. Displays are visible in installed location.			✓
M. Operates on emergency power.			✓
N. Multi-line sequential display operates as per Clause 6.4.1 (N) where utilized.			✓

BUILDING NAME:	MEMORIAL ARENA DRUMHELLER		
BUILDING ADDRESS:	20 1 Avenue West, Drumheller, AB, T0J 0Y2		
DATE:	08/24/2022		
MANUFACTURER:	Simplex	MODEL NUMBER:	Simplex 4010
SR#:	51538586	SITE CONTACT:	Reg Bennet

C2.7 Annunciators or Sequential Displays

(Reference: Clauses 6.1.4, 6.4.2)

Annunciator or remote trouble signal unit location: _____ N/A
 Annunciator or remote trouble signal unit identification: _____ N/A

	YES	NO	N/A
A. Power on indicator operates.			✓
B. Individual alarm and supervisory zone indication operates (see exception below).			✓
C. Operation of each individual alarm & supervisory zone indication gives the identical indication, or light the identical indicators at the other annunciator(s), and sequential display(s). Specific method of confirmation:			✓
D. Minimum of one alarm zone and one supervisory zone tested per annunciator or sequential display to confirm operation.			✓
E. Individual alarm and supervisory input zone designation labels are properly identified.			✓
F. When active and supporting field devices are utilized, device labels shall be confirmed to correspond with actual field location.			✓
G. Common trouble signal operates.			✓
H. Visual indicator test (lamp test) operates			✓
I. Input wiring from control unit or transponder is supervised			✓
J. Alarm signal silence visual indicator operates.			✓
K. Switches for ancillary functions operate as per design and specification, or in accordance with documentation as detailed in Appendix E, Description of Fire Alarm System for Inspection and Test Procedures.			✓
L. Ancillary functions visual indicators operate.			✓
M. Manual activation of alarm signal and indication operates.			✓
N. Displays are visible in installed location.			✓

BUILDING NAME:	MEMORIAL ARENA DRUMHELLER		
BUILDING ADDRESS:	20 1 Avenue West, Drumheller, AB, T0J 0Y2		
DATE:	08/24/2022		
MANUFACTURER:	Simplex	MODEL NUMBER:	Simplex 4010
SR#:	51538586	SITE CONTACT:	Reg Bennet

C2.8 Remote Trouble Signal Unit and Inspection

(Reference: Clauses 5.1.4, 5.4.3)

Remote Trouble Unit Location: _____ N/A
 Remote Trouble Signal Unit Identification: _____ N/A

	YES	NO	N/A
A. Input wiring from the control unit or transponder is supervised.			✓
B. Visual trouble signal operates.			✓
C. Audible trouble signal operates.			✓
D. Audible trouble signal silence operates.			✓

BUILDING NAME:	MEMORIAL ARENA DRUMHELLER		
BUILDING ADDRESS:	20 1 Avenue West, Drumheller, AB, T0J 0Y2		
DATE:	08/24/2022		
MANUFACTURER:	Simplex	MODEL NUMBER:	Simplex 4010
SR#:	51538586	SITE CONTACT:	Reg Bennet

C2.9 Printer Test

(Reference: Clauses 5.1.4, 5.5.1)

Printer Location:

N/A

YES	NO	N/A
-----	----	-----

A. Operates as per design and specification, or in accordance with documentation as detailed in Appendix E, Description of Fire Alarm System for Inspection and Test Procedures.

		✓
--	--	---

B. Zone of each alarm initiating device is correctly printed.

		✓
--	--	---

C. Rated voltage is present.

		✓
--	--	---

BUILDING NAME:				MEMORIAL ARENA DRUMHELLER			
BUILDING ADDRESS:				20 1 Avenue West, Drumheller, AB, T0J 0Y2			
DATE:				08/24/2022			
MANUFACTURER:		Simplex		MODEL NUMBER:		Simplex 4010	
SR#:		51538586		SITE CONTACT:		Reg Bennet	

C2.10 Operation Test for Data Communication Link

(Reference: Clauses 6.1.5, 6.6-Note)

Control Unit or Transponder Location: Main entrance
 Control Unit or Transponder Identification: FACP
 Data Communication Link Identification: N/A

YES	NO	N/A
-----	----	-----

A. Confirm that a trouble signal is received at the control unit or transponder under and open loop fault for each data communication link (DCL).

		✓
--	--	---

B. Where fault isolation modules are installed in data communication links serving field devices, wiring shall be shorted on the isolated side, annunciation of the fault confirmed, and then a field device on the source side shall be operated, and activation confirmed at the control unit or transponder.

		✓
--	--	---

C. Where fault isolation in data communication links is provided between control units or transponders and between transponders, introduce a short circuit fault and confirm annunciation of the fault and operation outside the shorted section between each pair of:

- i. Control unit to control unit
- ii. Control unit to transponder
- iii. Transponder to transponder

		✓
		✓
		✓

BUILDING NAME:	MEMORIAL ARENA DRUMHELLER		
BUILDING ADDRESS:	20 1 Avenue West, Drumheller, AB, T0J 0Y2		
DATE:	08/24/2022		
MANUFACTURER:	Simplex	MODEL NUMBER:	Simplex 4010
SR#:	51538586	SITE CONTACT:	Reg Bennet

C2.11 Interconnection to the Fire Signal Receiving Centre

(Reference: Clauses 6.2.2.1)

- A. The fire signal receiving centre transmitter is integral to the fire alarm control unit.
- B. An interconnection between the fire alarm control unit and a separate fire signal receiving centre transmitter is provided.
- C. Tested and confirmed operation of alarm relay.
- D. Tested and confirmed operation of trouble relay.
- E. Tested and confirmed operation of supervisory relay.
- F. Confirm receipt of the alarm transmission to the fire signal receiving centre is received.
- G. Confirm receipt of the supervisory transmission to the fire signal receiving centre is received.
- H. Confirm receipt of the trouble transmission to the fire signal receiving centre is received
- I. Operation of the fire signal receiving centre disconnect means results in a specific trouble indication at the control unit or transponder and transmits a trouble signal to the fire signal receiving centre.transmitter is provided.
- J. Record the name and telephone number of the fire signal receiving centre:

YES	NO	N/A
		✓
✓		
✓		
✓		
		✓
✓		
		✓
✓		
✓		

Total Control (Taken off line by customer)

Name: System 58-9003 password Paintball

Telephone: 1.800.268.6820

BUILDING NAME:				MEMORIAL ARENA DRUMHELLER			
BUILDING ADDRESS:				20 1 Avenue West, Drumheller, AB, T0J 0Y2			
DATE:				08/24/2022			
MANUFACTURER:		Simplex		MODEL NUMBER:		Simplex 4010	
SR#:		51538586		SITE CONTACT:		Reg Bennet	

C2.12 Ancillary Device Circuit Test

(Reference: Clauses 6.2.2.1-Z)

Record Specific Type of Ancillary Device	Address	Location	Operation of Ancillary Circuit Confirmed	
Note: The tests reported on this form do not include the actual operational test of ancillary devices.			YES	NO
MONITORING - ALARM/TROUBLE		MONITORING - ALARM/TROUBLE	✓	

C2.13 Deficiencies

(Reference: 6.1.2 & C2)

SEE DEFICIENCIES PAGE
Refer to the appendix area at the bottom of the report by clicking here .

C2.14 Recommendations

(Reference: 6.1.2)

N/A

C2.15 Remarks

(Reference: 6.1.2)

1-Keypad beside FACP customer must reset. 2-AC Breaker located inside Confectionary Panel K CCT 18

BUILDING NAME:				MEMORIAL ARENA DRUMHELLER			
BUILDING ADDRESS:				20 1 Avenue West, Drumheller, AB, T0J 0Y2			
DATE:				08/24/2022			
MANUFACTURER:		Simplex		MODEL NUMBER:		Simplex 4010	
SR#:		51538586		SITE CONTACT:		Reg Bennet	

C3. FIELD DEVICE RECORD

(Reference: Clause 6.1.6)

C3.1 FIELD DEVICE RECORD - LEGEND & NOTES

(Reference: Clause 6.7.4.1.3, 6.7.4.1.5, 6.7.4.3.1, 6.7.4.5.1, 6.7.8.1.1, 6.7.8.2.2, 6.7.8.2.4)

DEVICE	DESCRIPTION	MANUFACTURER	MODEL NO.
PS	Pull Station	Mircom	73353
PS-1	Pull Station	Edwards	270-SPO
PS-2	Pressure Switch		
DD	Duct Detector	Simplex	4098-9685
TS	Tamper Switch		
EoL	End of Line		
FSC	Fire Suppression Connection		
HD	Heat Detector	Edwards	281-C
H	Horn/Strobe	Edwards	757H-15PS
ADC	Ancillary Device Circuit		

BUILDING NAME:	MEMORIAL ARENA DRUMHELLER		
BUILDING ADDRESS:	20 1 Avenue West, Drumheller, AB, T0J 0Y2		
DATE:	08/24/2022		
MANUFACTURER:	Simplex	MODEL NUMBER:	Simplex 4010
SR#:	51538586	SITE CONTACT:	Reg Bennet

The following notes apply to Appendix C3.2, Individual Device Record

- NOTE 1: Smoke detector sensitivity confirmation or measurement should be recorded in the remarks column.
- NOTE 2: Smoke detector cleaning and replacement date should also be recorded in the remarks column.
- NOTE 3: Status change, including time delay should be recorded in the remarks column.
- NOTE 4: Duct smoke detector pressure differential should be recorded in the remarks column.
- NOTE 5: Time delay setting of water flow switch should be recorded in the remarks column.
- NOTE 6: Sprinkler supervisory switches cause a trouble condition to be annunciated but not an alarm condition.
- NOTE 7: Upper and lower pressure setting of supervisory devices should be recorded in the remarks column.
- NOTE 8: Low temperature setting should be recorded in the remarks column.
- NOTE 9: Identify the specific ancillary devices in the remarks column.
- NOTE 10: Identify date field device changed in the remarks column.
- NOTE 11: Identify correct field device operation (e.g. alarm trouble, supervisory, annunciation indication).
- NOTE 12: Identify zone, circuit number, or address.
- NOTE 13: Identify conventional field device locations.
- NOTE 14: Identify active field device and supporting field device, data communication link (DCL), address and location.
- NOTE 15: Test and confirm conventional field device and supervision of wiring.
- NOTE 16: Confirm field device free of damage.
- NOTE 17: Confirm field device free of foreign substance.
- NOTE 18: Confirm field device mechanically supported independent of wiring.
- NOTE 19: Confirm field device protective dust shields or covers removed.
- NOTE 20: "Correctly installed" refers to the version of CAN/ULC-S524, Standard for Installation of Fire Alarm Systems, applicable at the time of installation of device being tested.

CAUTION: The tests reported in this Form do not include the actual operational test of ancillary devices

BUILDING NAME:	MEMORIAL ARENA DRUMHELLER		
BUILDING ADDRESS:	20 1 Avenue West, Drumheller, AB, T0J 0Y2		
DATE:	08/24/2022		
MANUFACTURER:	Simplex	MODEL NUMBER:	Simplex 4010
SR#:	51538586	SITE CONTACT:	Reg Bennet

C3.2 INDIVIDUAL DEVICE RECORD

(Reference: Clauses 6.7, 6.7.1.3, 6.7.4.1.5, 6.7.8.1.1, 6.7.8.2.2, 6.7.8.2.4, 6.7.11.1, 6.7.11.2, C3.1)

Location	Device	Zone Circuit Number or Address	Measurements	Correctly Installed	Requires Service, Repairs, Cleaning or Missing	Alarm Operation Confirmed	Output Circuit Operation Confirmed	Annunciation Indication Confirmed	Notes	Status
2nd Floor NE Exit	Pull Station (PS)	Zone 13		✓		✓	✓	✓		Passed 08/24/2022
2nd Floor NW Exit	Pull Station (PS-1)	Zone 13		✓		✓	✓	✓		Passed 08/24/2022
2nd Floor North Wall Centre East Exit	Pull Station (PS-1)	Zone 14		✓		✓	✓	✓		Passed 08/24/2022
2nd Floor North Wall Centre West Exit	Pull Station (PS-1)	Zone 14		✓		✓	✓	✓		Passed 08/24/2022
Main Floor Compressor Room Exit	Pull Station (PS-1)	Zone 16		✓		✓	✓	✓		Passed 08/24/2022
Main Floor East Exit 121-123	Pull Station (PS-1)	Zone 16		✓		✓	✓	✓		Passed 08/24/2022
Main Floor Entrance North	Pull Station (PS-1)	Zone 16		✓		✓	✓	✓		Passed 08/24/2022
Main Floor Entrance South	Pull Station (PS-1)	Zone 16		✓		✓	✓	✓		Passed 08/24/2022
Main Floor NE Exit	Pull Station (PS-1)	Zone 16		✓		✓	✓	✓		Passed 08/24/2022
Main Floor NW Exit	Pull Station (PS-1)	Zone 16		✓		✓	✓	✓		Passed 08/24/2022
Main Floor SE Exit	Pull Station (PS-1)	Zone 16		✓		✓	✓	✓		Passed 08/24/2022
Main Floor SW Exit	Pull Station (PS-1)	Zone 16		✓		✓	✓	✓		Passed 08/24/2022
Dry sprinkler system pressure flow switch - sprinkler/water entry area - instant	Pressure Switch (PS-2)	M1-04		✓		✓	✓	✓		Passed 08/24/2022
Dry sprinkler system low air pressure - sprinkler/water entry area - Trouble @ 14 psi.	Pressure Switch (PS-2)	M1-08		✓		✓	✓	✓		Passed 08/24/2022
Dry sprinkler system air compressor - sprinkler/water entry area - on @ 24 psi. off @ 43 psi.	Pressure Switch (PS-2)			✓		✓	✓	✓		Passed 08/24/2022
North Change Room E#4	Duct Detector (DD)	Zone 1		✓		✓	✓	✓		Passed 08/24/2022
2nd Floor Lounge Ceiling	Duct Detector (DD)	Zone 2		✓		✓	✓	✓	Notes: LOCATED UNDER EOL AHU PLATE ON CEILING TILE CENTRE	Passed 08/24/2022
DCVA supply valve tamper - sprinkler/water entry area	Tamper Switch (TS)	M1-05		✓		✓	✓	✓		Passed 08/24/2022
DCVA discharge valve tamper - sprinkler/water entry area	Tamper Switch (TS)	M1-06		✓		✓	✓	✓		Passed 08/24/2022

BUILDING NAME:	MEMORIAL ARENA DRUMHELLER		
BUILDING ADDRESS:	20 1 Avenue West, Drumheller, AB, T0J 0Y2		
DATE:	08/24/2022		
MANUFACTURER:	Simplex	MODEL NUMBER:	Simplex 4010
SR#:	51538586	SITE CONTACT:	Reg Bennet

Location	Device	Zone Circuit Number or Address	Measurements	Correctly Installed	Requires Service, Repairs, Cleaning or Missing	Alarm Operation Confirmed	Output Circuit Operation Confirmed	Annunciation Indication Confirmed	Notes	Status
Dry sprinkler system supply valve tamper - sprinkler/water entry area	Tamper Switch (TS)	M1-07		✓		✓	✓	✓		Passed 08/24/2022
EOL 2nd Flr NE Exit	End of Line (EoL)	Zone 13		✓		✓	✓	✓		Passed 08/24/2022
EOL Lounge 2nd Flr North Wall Centre West Exit	End of Line (EoL)	Zone 14		✓		✓	✓	✓		Passed 08/24/2022
EOL 2nd Flr Elevator Mechanical Room	End of Line (EoL)	Zone 15		✓		✓	✓	✓		Passed 08/24/2022
EOL 1st Flr SE Exit	End of Line (EoL)	Zone 16		✓		✓	✓	✓		Passed 08/24/2022
EOL SW Exit	End of Line (EoL)	NAC 3		✓		✓	✓	✓		Passed 08/24/2022
EOL SE Exit	End of Line (EoL)	NAC 4		✓		✓	✓	✓		Passed 08/24/2022
Kitchen Suppression System	Fire Suppression Connection (FSC)	Zone 9		✓		✓	✓	✓		Passed 08/24/2022
2nd Floor Elevator Mechanical Room	Heat Detector (HD)	Zone15		✓		✓	✓	✓	Notes: KEY REQUIRED	Passed 08/24/2022
Top Of Elevator Shaft	Heat Detector (HD)	Zone15							NT NO ELEVATOR TECH	Cannot Inspect 08/24/2022
2nd Floor SW	Horn/Strobe (H)	SIG 3		✓			✓			Passed 08/24/2022
Main Entrance North	Horn/Strobe (H)	SIG 3		✓			✓			Passed 08/24/2022
Main Entrance South	Horn/Strobe (H)	SIG 3		✓			✓			Passed 08/24/2022
SW Exit	Horn/Strobe (H)	SIG 3		✓			✓			Passed 08/24/2022
121 Training Room	Horn/Strobe (H)	SIG 4		✓			✓			Passed 08/24/2022
121-123 East Exit	Horn/Strobe (H)	SIG 4		✓			✓			Passed 08/24/2022
123 Change Room Central	Horn/Strobe (H)	SIG 4		✓			✓			Passed 08/24/2022
123 Change Room North	Horn/Strobe (H)	SIG 4		✓			✓			Passed 08/24/2022
123 Change Room South	Horn/Strobe (H)	SIG 4		✓			✓			Passed 08/24/2022
2nd Floor North Wall East Exit	Horn/Strobe (H)	SIG 4		✓			✓			Passed 08/24/2022
2nd Floor NE Exit	Horn/Strobe (H)	SIG 4		✓			✓			Passed 08/24/2022
2nd Floor NW Exit	Horn/Strobe (H)	SIG 4		✓			✓			Passed 08/24/2022

BUILDING NAME:				MEMORIAL ARENA DRUMHELLER			
BUILDING ADDRESS:				20 1 Avenue West, Drumheller, AB, T0J 0Y2			
DATE:				08/24/2022			
MANUFACTURER:		Simplex		MODEL NUMBER:		Simplex 4010	
SR#:		51538586		SITE CONTACT:		Reg Bennet	

Location	Device	Zone Circuit Number or Address	Measurements	Correctly Installed	Requires Service, Repairs, Cleaning or Missing	Alarm Operation Confirmed	Output Circuit Operation Confirmed	Annunciation Indication Confirmed	Notes	Status
2nd Floor SE	Horn/Strobe (H)	SIG 4		✓			✓			Passed 08/24/2022
Compressor Room	Horn/Strobe (H)	SIG 4		✓			✓			Passed 08/24/2022
North Change Room Centre East	Horn/Strobe (H)	SIG 4		✓			✓			Passed 08/24/2022
North Change Room Centre West	Horn/Strobe (H)	SIG 4		✓			✓			Passed 08/24/2022
North Change Room East	Horn/Strobe (H)	SIG 4		✓			✓			Passed 08/24/2022
North Change Room West	Horn/Strobe (H)	SIG 4		✓			✓			Passed 08/24/2022
NE Exit	Horn/Strobe (H)	SIG 4		✓			✓			Passed 08/24/2022
NW Exit	Horn/Strobe (H)	SIG 4		✓			✓			Passed 08/24/2022
SE Exit	Horn/Strobe (H)	SIG 4		✓			✓			Passed 08/24/2022

C2.13 Deficiencies Appendix

(Reference: 6.1.2 & C2)

DEVICE DEFICIENCIES									
LOCATION	DESCRIPTION	ADDRESS	DEVICE	MAKE	MODEL	BARCODE	DATE OF TEST	TYPE	IMAGES
—	Main FACP	—	Emergency Power Supply	—	—	—	08/24/2022	REQUIRES SERVICE, REPAIRS, CLEANING OR MISSING	DEFICIENCY IMAGES APPENDIX 1.1
FAILURE REASON: BATTERIES FAILED OVER 5 YEARS IN SERVICE (2X 12V12AH CLIP ON)									

DEFICIENCY IMAGE APPENDICES

LOCATION	DESCRIPTION	DEVICE	BARCODE	TYPE	IMAGES
	Main FACP	Emergency Power Supply	—	REQUIRES SERVICE, REPAIRS, CLEANING OR MISSING	DEFICIENCY IMAGES APPENDIX 1.1

FAILURE REASON: BATTERIES FAILED OVER 5 YEARS IN SERVICE (2X 12V12AH CLIP ON)



CUSTOMER NAME: MEMORIAL ARENA DRUMHELLER
BUILDING NAME: MEMORIAL ARENA DRUMHELLER
BUILDING ADDRESS: 20 1 Avenue West, Drumheller, AB, T0J 0Y2
CONTACT NAME: Reg Bennet
CONTACT E-MAIL: rbennett@drumheller.ca
CONTACT ROLE: Maintenance manager
CONTACT PHONE: +1 4038200233
INSPECTION TYPE: Sprinkler
FREQUENCY: Annual
WORK ORDER: 51538588
INSPECTION END DATE: 08/24/2022

INSPECTORS: Clarence Hankel
INSPECTOR LICENSE: VB 1347
ACCOUNT NAME: Johnson Controls North America
OFFICE ADDRESS: 431 manitou road se
OFFICE PHONE: 403-287-3202
OFFICE LICENSE:
TIMEZONE: MDT

SPRINKLER INSPECTION REPORT

DEVICE DEFICIENCIES

No device deficiencies in this inspection.

OTHER DEFICIENCIES

- Fire department connection on south wall of building is not visible because of shrubbery and plants. Should be made clear for fire department access
- Sprinkler system water supply backflow preventer is overdue for testing. Last tested in June 2017.
- Dry pendant sprinkler heads at 2 level are over 10 years old and a sample will need to be taken for ULC testing (26-chrome 155 quick response 12" dry pendant sprinkler heads total) 12- are missing flat style escutcheon plates

General

To be Answered with the Owner

1.	Have there been any changes in the occupancy classification, machinery or operations since the last inspection?	No
2.	Have there been any changes or repairs to the fire protection systems since the last inspection? Obstruction inspections completed	Yes
3.	If a fire has occurred since the last inspection, have all damaged sprinkler system components been replaced?	Not Applicable
4.	Have you had an internal pipe inspection performed in the last 5 years?	Yes
5.	Date the internal pipe inspection was performed?	07/14/2021
6.	Are Special Ladders or Lifts Required to perform the 5 Year Internal Pipe Inspection? If So, please list Size and Type. (12 Foot Stepladder, 20 Foot Scissor Lift Etc...) 26 foot lift	Yes

To be Answered by the Inspector

1.	Have the sprinkler systems been extended to all areas of the building?	Yes
2.	Are all exterior openings protected against the entrance of cold air?	Yes
3.	Are the building areas protected by a wet system heated, including its blind attics and perimeter areas?	Not Applicable
4.	Date Backflow Devices Were Tested	06/08/2017
5.	Number Of Water Gauges	1
6.	Number Of Air Gauges	2
7.	Mainline Strainers Inspected and Cleaned	Not Applicable
8.	Are all Tanks, Fire Pumps, and Fire Department Connections Inspected and Tested Per NFPA 25?	No
9.	Has The Private Fire Main Been Flow Tested In The Last 5 Years?	Not Applicable
10.	Date That The Private Fire Main Been Flow Tested?	Not Answered
11.	Have the Master Pressure Regulating Devices been tested at full flow within the past year?	Not Applicable
12.	Date The Master Pressure Regulating Devices Full Flow Tests were Performed	Not Answered
13.	Has The Pressure Reducing Valves Test Been Performed In The Last 5 Years	Not Applicable
14.	Date The Pressure Reducing Valves Test Was Performed	Not Answered
15.	All Systems Restored To Normal	Yes

General

Water Supplies		
1.	Type	City

Control Valve Questions		
1.	Are all sprinkler system main control valves and all other valves in the appropriate open or closed position?	Yes
2.	Are all control valves sealed, locked, or supervised, in the appropriate open or closed position?	Yes

Alarms		
1.	Did the electric alarms operate during testing?	Yes
2.	Did the supervisory alarms operate during testing?	Yes

Sprinklers - Piping		
1.	Were All Sprinklers Made After 1920	Yes
2.	Standard Response Sprinklers 50 Years Or Older	No
3.	Quick Response Sprinklers 20 years or older?	No
4.	Dry Pendent Sprinklers 10 Years Or Older 28 total 12 missing escutcheon plates	Yes
5.	High Temperature Sprinklers (Greater Than 325F Or 163C) 5 Years Or Older	Not Applicable
6.	Corrosive Environment Sprinklers 5 Years Or Older	Not Applicable
7.	Are Any Extra High Temperature Solder Sprinklers Regularly Exposed To Temperatures Near 300°F	Not Applicable
8.	Do sprinklers generally appear to be free of corrosion, paint, or loading and visible obstructions?	Yes
9.	Is the buildings sprinklers inventory list located within the sprinkler spare head cabinet?	Not Applicable
10.	Are appropriate number of extra sprinklers and sprinkler wrenches available on the premises? 8- upright, 2- sidewall	Yes
11.	Type of sprinkler heads	Dry pendant, Upright & Sidewall
12.	Does there appear to be proper clearance between the top of all storage and the sprinkler deflector?	Yes
13.	Does the exposed exterior condition of piping, drain valves, check valves, hangers, pressure gauges, open sprinklers and strainers appear to be satisfactory? No walk through due to Covid 19.	Not Applicable
14.	Does the hand hose on the sprinkler system appear to be in satisfactory condition?	Not Applicable

Devices

INSPECTION RESULTS SUMMARY				
DEVICE TYPE	INVENTORY COUNT	PASSED	FAILED	CANNOT INSPECT
City Connection Control Valve	2	2	0	0
Dry System	1	1	0	0
Fire Dept. Connection	1	1	0	0
Pressure Switch	3	3	0	0
System Control Valve	1	1	0	0
Tamper Switch	3	3	0	0
Main Drain Test	1	1	0	0
Water Motor Gong	1	1	0	0

Devices

DRY SYSTEMS							
#	LOCATION	DESCRIPTION	DEVICE TYPE	BARCODE	INSPECTOR	DATE OF TEST	RESULT
1	Fire suppression room	Sprinkler/water entry area - by zamboni area & maintenance shop	Dry System	—	Clarence Hankel	08/24/2022	Passed
Make and Model							TFP DPV-1
What Size Is This Dry Pipe Valve							4"
Hydraulic Name Plate Present							Yes
Record The Coverage Area Defined On The Hydraulic Plate							181 sq/m
Record The GPM On The Hydraulic Plate							1374.6
Do dry valves appear to be protected from freezing?							Yes
Visually Inspect - Is Intermediate Chamber Free From Leakage							Yes
Are the air pressure and priming water levels normal?							Yes
Does the Air Supply operate satisfactorily?							Yes
Visually Inspect - Is Exterior Of The Valve In Good Condition And Both Gauges Operable							Yes
Visually Inspect - Are Trim Valves In Their Appropriate Open Or Closed Positions							Yes
Valve Seat Leak Tight							Yes
Trim Piping Leak Tight							Yes
System Gauges Undamaged And Reading Within Limits							Yes
Wet Gauge PSI							45
Dry Gauge PSI							43
Quantity of Auxiliary / Low Point drains drained during this inspection?							18
Priming Water At Proper Level							Yes
Partial or Full Flow Trip Test Performed							Partial
Date of Last Full Flow Dry Trip Test							10/09/2020
Results Of Trip Test							Pass
Trip Test Comparable To Previous Test							Yes
Date the internal pipe inspection was performed?							07/14/2021
Date of Gauges Replacement							07/17/2021
Date of Check Valves Internal Inspection							07/14/2021
Date of Internal Inspection of Dry Valve Strainers, Filters, And Restriction Orifices.							N/A
Notes:							
LOW POINTS (20 TOTAL): L/P - IN STORAGE CAGE BY DRY VALVE L/P - BY SW EXIT ON LEFT SIDE UNDER STANDS BY ROOM 102 D/D - BY SW EXIT IN CONCOURSE D/D - IN MENS WASHROOM AT MAIN ENTRANCE D/D - IN HEATING EQUIPMENT ROOM 106 D/D - BY NW EXIT BY ELEVATOR L/P - DRESSING ROOM #2 (LADDER REQUIRED) L/P - DRESSING ROOM #4 (LADDER REQUIRED) D/D - IN MECH ROOM L/P - IN MAINTENANCE SHOP BY ZAMBONI ROOM L/P - IN LAUNDRY ROOM (LADDER REQUIRED) L/P - IN DRESSING ROOM (LADDER REQUIRED) 3X L/P - IN PHYSIO ROOM (LADDER REQUIRED) D/D - IN DRAGONS EQUIPMENT ROOM 121 2X L/P - UNDER NE STAIRS STORAGE ROOM 128 2X L/P - BY PRESS BOX 202 (UPSTAIRS)							

Devices

MAIN DRAIN TESTS							
#	LOCATION	DESCRIPTION	DEVICE TYPE	BARCODE	INSPECTOR	DATE OF TEST	RESULT
1	Fire suppression room	Sprinkler header	Main Drain Test	—	Clarence Hankel	08/24/2022	Passed
Test pipe located							Sprinkler/water entry area
Size of test pipe							2"
Previous Main Drain Test Date							07/27/2021
Previous Main Drain Static Pressure							50
Previous Main Drain Residual Pressure							46
Static supply pressure							50 psi.
Residual Pressure							46 psi.
Time to return to normal system pressure							Instant
Static supply pressure after completion of test							50 psi.
Main Drain PSI Comparable to previous?							Yes
Main drain opened & free of obstruction discoloration?							Yes

FIRE DEPARTMENT CONNECTIONS							
#	LOCATION	DESCRIPTION	DEVICE TYPE	BARCODE	INSPECTOR	DATE OF TEST	RESULT
1	Fire suppression room	Fire Department Connection	Fire Dept. Connection	—	Clarence Hankel	08/24/2022	Passed
Is FDC Visible / Accessible?							No
* South of building obstructed by shrubs and plants							
Are Couplings / Swivels / Plugs / Caps in place?							Yes
Identification Signs In Place							Yes
Check Valve Not Leaking / Gaskets In Good Condition / Ball Drip and Clapper in Place and Operating Properly							Yes
FDC Hydrostatic Test Date							07/10/2021
FDC Check Valves Internal Inspection Date							07/14/2021

CONTROL VALVES AGG								
#	LOCATION	DESCRIPTION	ADDRESS	DEVICE TYPE	BARCODE	INSPECTOR	DATE OF TEST	RESULT
1	Fire suppression room	DCVA discharge	M1-6	City Connection Control Valve	—	Clarence Hankel	08/24/2022	Passed
Type and Size								4" OS&Y
Easily Accessible?								Yes
Signs?								Yes
Valve in the Appropriate Open or Closed Position?								Yes
Sealed, Locked, and/or Supervised								Supervised
Free from External Leaks?								Yes
Control Valve Fully Exercised?								Yes

Devices

CONTROL VALVES AGG

#	LOCATION	DESCRIPTION	ADDRESS	DEVICE TYPE	BARCODE	INSPECTOR	DATE OF TEST	RESULT
2	Fire suppression room	DCVA supply	M1-5	City Connection Control Valve	—	Clarence Hankel	08/24/2022	Passed
Type and Size								4" OS&Y
Easily Accessible?								Yes
Signs?								Yes
Valve in the Appropriate Open or Closed Position?								Yes
Sealed, Locked, and/or Supervised								Supervised
Free from External Leaks?								Yes
Control Valve Fully Exercised?								Yes
3	Fire suppression room	Dry sprinkler system supply	M1-7	System Control Valve	—	Clarence Hankel	08/24/2022	Passed
Type and Size								4" GOBV
Easily Accessible?								Yes
Signs?								Yes
Valve in the Appropriate Open or Closed Position?								Yes
Sealed, Locked, and/or Supervised								Supervised
Free from External Leaks?								Yes
Control Valve Fully Exercised?								Yes

WATER MOTOR GONG

#	LOCATION	DESCRIPTION	DEVICE TYPE	BARCODE	INSPECTOR	DATE OF TEST	RESULT
1	Fire suppression room	Water motor gong	Water Motor Gong	—	Clarence Hankel	08/24/2022	Passed
Water Motor Alarm Test Valve Closed?							Yes
Water Motor Alarm Leak Tight?							Yes
Visual Inspection - Is Water Motor Alarm Free of Damage?							Yes
Open Test Connection / Bypass - Did Water Motor Alarm Activate the Alarm?							Yes
Is exterior alarm operational?							Yes

TAMPER SWITCHES

#	LOCATION	DESCRIPTION	ADDRESS	DEVICE TYPE	BARCODE	INSPECTOR	DATE OF TEST	RESULT
1	Fire suppression room	DCVA discharge valve	M1-6	Tamper Switch	—	Clarence Hankel	08/24/2022	Passed
Quarterly Visual Inspection - Is tamper switch free of damage with its electrical connections secure?								Yes
2	Fire suppression room	DCVA supply valve	M1-5	Tamper Switch	—	Clarence Hankel	08/24/2022	Passed
Quarterly Visual Inspection - Is tamper switch free of damage with its electrical connections secure?								Yes
3	Fire suppression room	Dry sprinkler system supply	M1-7	Tamper Switch	—	Clarence Hankel	08/24/2022	Passed
Quarterly Visual Inspection - Is tamper switch free of damage with its electrical connections secure?								Yes

Devices

SUPERVISORY POINTS								
#	LOCATION	DESCRIPTION	ADDRESS	DEVICE TYPE	BARCODE	INSPECTOR	DATE OF TEST	RESULT
1	Fire suppression room	Dry sprinkler system compressor	N/A	Pressure Switch	—	Clarence Hankel	08/24/2022	Passed
Quarterly Visual Inspection - Is this Supervisory Device free of damage with its electrical connections secure?								Yes
2	Fire suppression room	Dry sprinkler system low air pressure	M1-8	Pressure Switch	—	Clarence Hankel	08/24/2022	Passed
Quarterly Visual Inspection - Is this Supervisory Device free of damage with its electrical connections secure?								Yes
3	Fire suppression room	Dry sprinkler system pressure flow	M1-4	Pressure Switch	—	Clarence Hankel	08/24/2022	Passed
Quarterly Visual Inspection - Is this Supervisory Device free of damage with its electrical connections secure?								Yes

Recommendations

1.	The inspector suggests the following necessary improvements. These suggestions are not the result of an engineering survey and do not reflect conditions above ceilings or in concealed spaces.	Not Applicable
2.	Adjustments or corrections made.	Not Applicable
3.	List changes in occupancy, hazard or fire protection system, as advised by customer.	Not Applicable
4.	Inspection deficiencies and suggested improvements were discussed with the customer/customer representative.	Not Applicable

<p>Inspector Signature _____</p>		<p>Inspector Name _____ Clarence Hankel</p>	<p>Date _____</p>	<p>08/24/2022</p>
-----------------------------------------	-------------------------------------------------------------------------------------	----------------------------------------------------	--------------------------	-------------------

Terms And Conditions

1. **Limitation of Liability; Limitations Of Remedy.** It is understood and agreed by the Customer that Company is not an insurer and that insurance coverage, if any, shall be obtained by the Customer and that amounts payable to Company hereunder are based upon the value of the services and the scope of liability set forth in this agreement and are unrelated to the value of the Customer's property and the property of others located on the premises. Customer agrees to look exclusively to the Customer's insurer to recover for injuries or damage in the event of any loss or injury and that Customer releases and waives all right of recovery against Company arising by way of subrogation. Company makes no guaranty or Warranty, including any implied warranty of merchantability or fitness for a particular purpose that equipment or services supplied by Company will detect or avert occurrences or the consequences there from that the equipment or service was designed to detect or avert.
It is impractical and extremely difficult to fix the actual damages, if any, which may proximately result from failure on the part of Company to perform any of its obligations under this agreement. Accordingly, Customer agrees that, Company shall be exempt from liability for any loss, damage or injury arising directly or indirectly from occurrences, or the consequences therefrom, which the equipment or service was designed to detect or avert. Should Company be found liable for any loss, damage or injury arising from a failure of the equipment or service in any respect, Company's liability shall be limited to an amount equal to the agreement price (as increased by the price for any additional work) or where the time and material payment term is selected, Customer's time and material payments to Company. Where this agreement covers multiple sites, liability shall be limited to the amount of the payments allocable to the site where the incident occurred. Such sum shall be complete and exclusive. If Customer desires Company to assume greater liability, the parties shall amend this agreement by attaching a rider setting forth the amount of additional liability and the additional amount payable by the Customer for the assumption by Company of such greater liability, provided however that such rider shall in no way be interpreted to hold Company as an insurer. IN NO EVENT SHALL COMPANY BE LIABLE FOR ANY DAMAGE, LOSS, INJURY, OR ANY OTHER CLAIM ARISING FROM ANY SERVICING, ALTERATIONS, MODIFICATIONS, CHANGES, OR MOVEMENTS OF THE COVERED SYSTEM(S) OR ANY OF ITS COMPONENT PARTS BY THE CUSTOMER OR ANY THIRD PARTY. COMPANY SHALL NOT BE LIABLE FOR INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES OF ANY KIND, INCLUDING BUT NOT LIMITED TO DAMAGES ARISING FROM THE USE, LOSS OF THE USE, PERFORMANCE, OR FAILURE OF THE COVERED SYSTEM(S) TO PERFORM. The limitations of liability set forth in this agreement shall inure to the benefit of all parents, subsidiaries and affiliates of Company, whether direct or indirect, Company's employees, agents, officers and directors.
2. **Limited Warranty.** COMPANY WARRANTS THAT ITS WORKMANSHIP AND MATERIAL FURNISHED UNDER THIS AGREEMENT WILL BE FREE FROM DEFECTS FOR A PERIOD OF NINETY (90) DAYS FROM THE DATE OF FURNISHING. Where Company provides product or equipment of others, Company will warrant the product or equipment only to the extent warranted by such third party. EXCEPT AS EXPRESSLY SET FORTH HEREIN, COMPANY DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO THE SERVICES PERFORMED OR THE PRODUCTS, SYSTEMS OR EQUIPMENT, IF ANY, SUPPORTED HEREUNDER. COMPANY MAKES NO WARRANTY OR REPRESENTATION, AND UNDERTAKES NO OBLIGATION TO ENSURE BY THE SERVICES PERFORMED UNDER THIS AGREEMENT, THAT COMPANY'S PRODUCTS OR THE SYSTEMS OR EQUIPMENT OF THE CUSTOMER WILL CORRECTLY HANDLE THE PROCESSING OF CALENDAR DATES BEFORE OR AFTER DECEMBER 31, 1999.
3. **Indemnity.** Customer agrees to indemnify, hold harmless and defend Company against any and all losses, damages, costs, including expert fees and costs, and expenses including reasonable defense costs, arising from any and all third party claims for personal injury, death, property damage or economic loss, including specifically any damages resulting from the exposure of workers to Hazardous Conditions whether or not Customer pre-notifies Company of the existence of said hazardous conditions, arising in any way from any act or omission of Customer or Company relating in any way to this agreement, including but not limited to the Services under this agreement, whether such claims are based upon contract, warranty, tort (including but not limited to active or passive negligence), strict liability or otherwise. Company reserves the right to select counsel to represent it in any such action.
4. **Hazardous Materials.** Customer represents that, except to the extent that Company has been given written notice of the following hazards prior to the execution of this agreement, to the best of Customer's knowledge there is no:
 - a. "permit confined space," as defined by OSHA, or space in which work must be performed that, because of its construction, location, contents or work activity therein, accumulation of a hazardous gas, vapour, dust or fume or the creation of a risk of infectious disease
 - b. need for air monitoring, respiratory protection, or other medical risk
 - c. asbestos, asbestos-containing material, formaldehyde or other potentially toxic or otherwise hazardous material contained in or on the surface of the floors, walls, ceilings, insulation or other structural components of the area of any building
 - d. All of the above are hereinafter referred to as "Hazardous Conditions". Company shall have the right to rely on the representations listed above. If hazardous conditions are encountered by Company during the course of Company's work, the discovery of such conditions shall constitute an event beyond Company's control and Company shall have no obligation to further perform in the area where the hazardous conditions exist until the area has been made safe by Customer as certified in writing by an independent testing agency, and Customer shall pay disruption expenses and re-mobilization expenses as determined by Company. This agreement does not provide for the cost of capture, containment or disposal of any hazardous waste materials, or hazardous materials, encountered in any of the Covered System(s) and/or during performance of the Services. Said materials shall at all times remain the responsibility and property of Customer. Company shall not be responsible for the testing, removal or disposal of such hazardous materials.
5. **Equipment Disconnections.** This represents Company's notice to you that the system(s)/device(s) listed on the face of this agreement as temporarily or permanently disconnected are no longer in service and, thus, cannot detect, perform and/or report
6. **General.** Unless otherwise specified, work shall be performed during company's regular business hours,, exclusive of Saturdays, Sundays and Company holidays. All work is subject to review and rebilling in accordance with the terms and conditions of Customer's agreement/contract with Company, if one is in effect. Company shall not be responsible for failure to render services due to causes beyond its control, including but not limited to material shortages, work stoppages, fires, civil disobedience or unrest, severe weather, fire or any other cause beyond the control of Company. Customer is aware that the Limitation of Liability and other provisions set forth in any existing agreement/contract, if one is in effect, or set forth above, apply to services performed and materials supplied. The terms of this agreement shall govern notwithstanding any inconsistent or additional terms and conditions in any purchase order or other document submitted by Customer.

DEVICE NOTE IMAGE APPENDICES

M•L 8855

Geotechnical Report

Proposed Drumheller Curling Club

Drumheller, Alberta

Prepared For
GEC Architecture

Submitted On
July 9, 2019

Table of Contents

1.0 INTRODUCTION	1	4.13 PERMANENT DEWATERING SYSTEM	12
1.1 PROJECT AND SITE DETAILS	1	4.14 CONCRETE	12
2.0 METHODOLOGY	1	4.15 LATERAL WALL PRESSURES	12
2.1 SOILS INVESTIGATION	1	4.16 PERMANENT LATERAL WALL PRESSURES	13
2.2 GROUNDWATER	2	4.17 TEMPORARY LATERAL WALL PRESSURES	14
2.3 LABORATORY TESTING	2	4.18 TEMPORARY PASSIVE WALL RESISTANCE	14
3.0 SUBSURFACE CONDITIONS	2	4.19 BACKFILL MATERIALS AND COMPACTION	14
3.1 SURFICIAL GEOLOGY	2	5.0 REVIEW OF DESIGN AND CONSTRUCTION	15
3.2 SOILS	2	5.1 DESIGN AND CONSTRUCTION GUIDELINES	15
3.2.1 Fills / loams	3	6.0 LIMITATIONS	16
3.2.2 Silty Sand	3	7.0 CLOSURE	17
3.2.3 Sandy Gravel	3		
3.2.4 Silty Clay	3	Table 1: Geotechnical Resistance Factors for Foundations	6
3.2.5 Bedrock	3	Table 2: ULS Pile Resistances for LRFD	7
3.3 GROUNDWATER	4	Table 3: Allowable Pile Bearing Resistances for WSM	8
4.0 DISCUSSION AND RECOMMENDATIONS	4	Table 4: Horizontal Moduli of Subgrade Reaction	8
4.1 GENERAL	4	Table 5: Coefficients of Lateral Earth Pressure	13
4.2 FOUNDATION DESIGN RESISTANCE FACTORS	5		
4.3 DRILLED CAST-IN-PLACE CONCRETE PILES	6		
4.3.1 Pile Design Using LRFD	7		
4.3.2 Pile Design Using WSM	7		
4.3.3 Lateral Load Soil Parameters	8		
4.3.4 Group Effects	8		
4.4 SLIDING PARAMETERS	9		
4.5 SITE SOIL CLASSIFICATION FOR SEISMIC SITE RESPONSE	9		
4.6 SETTLEMENTS	9		
4.6.1 Pile Foundations	9		
4.7 FLOOR SLABS	9		
4.7.1 Slab-on-Grade	9		
4.8 STRUCTURAL SLABS	10		
4.9 FROST PROTECTION	10		
4.9.1 Structures	10		
4.9.2 Surface Concrete	11		
4.10 SITE GRADING AND DRAINAGE	11		
4.11 CONSTRUCTION EXCAVATIONS	11		
4.12 GROUNDWATER CONSIDERATIONS	12		

1.0 INTRODUCTION

This report presents the results of a geotechnical evaluation conducted by McIntosh•Lalani Engineering Ltd. (M•L) for a proposed construction of a new curling club building to be located adjacent to the existing Drumheller Memorial Arena in Drumheller, Alberta. A total of eight Boreholes (BH's 1-8) were advanced within the proposed development area. The objective of this evaluation was to assess the general subsurface soil and groundwater conditions at the site for the design and construction of the proposed curling club building. This evaluation was undertaken at the request of Mr. Robert Sterling of GEC Architecture.

This report presents the results of the drilling program and provides geotechnical recommendations for construction.

1.1 PROJECT AND SITE DETAILS

The proposed development at the site will include the design and construction of a 4 to 6 sheet curling club building with a partial second floor to oversee the ice surface. The proposed building will be a clear-span with wood or steel construction. A refrigerated slab has been proposed to be designed for year round operation. No below-grade development has been proposed for the subject site. The building site has been selected, however two options are being considered for the building orientation; a north-south orientation, and an east-west orientation. The site is located north of the existing Drumheller Memorial Arena and north of the intersection of 1st Avenue West and 1st Street West in Drumheller, AB. The site is bounded by an existing skate park / outdoor pool to the west, Aquaplex swimming facility further to the west and south bank of the Red Deer River to the north. There is currently no development present on the east side of the subject site.

2.0 METHODOLOGY

In order to assess the geotechnical site conditions including soil stratigraphy, groundwater conditions and soil properties, M•L completed a program of borehole drilling and installation of standpipe well combined with laboratory index testing.

The borehole location was selected by representatives of M•L. The location of the boreholes are illustrated in Drawing 8855.00.G101. The borehole logs are presented in Appendix A.

2.1 SOILS INVESTIGATION

The subsurface investigation consisted of advancing a total of eight (8) boreholes within the area for the proposed development to depths ranging from of 9.1 to 15.2 metres below the existing grade. The boreholes were advanced on September 14, 2018 using a track mounted solid stem auger drill rig contracted from All Service Drilling of Airdrie, Alberta. Classification of the soil was done from the disturbed samples obtained

from the auger flights and from the Standard Penetration Test (SPT) operation. SPT blow counts were utilized to aid in determining in-situ soil strengths.

2.2 GROUNDWATER

Upon completion of the boreholes, the depth of the borehole was measured, including any slough, and the presence or absence of free water within the borehole was noted. A 25 mm diameter slotted PVC standpipe well was installed in the boreholes to allow future measurement of groundwater level within the depth of the investigation. This type of installation assumes a simple groundwater regimen. Specifics of the well installation are illustrated on the borehole log.

2.3 LABORATORY TESTING

Laboratory testing including natural moisture content, soluble sulphate and hydrometer grain size analysis testing has been completed and the results have been reported in a separate letter.

3.0 SUBSURFACE CONDITIONS

At the time this report was prepared, information on subsurface stratigraphy was available only at discrete borehole locations. Conditions were extrapolated and interpolated from the borehole locations to develop recommendations. Adequate monitoring should be provided during construction to check that these assumptions are reasonable. The below summarizes the subgrade conditions encountered in the drilling program. More detailed soil description is contained in the borehole logs in Appendix A.

3.1 SURFICIAL GEOLOGY

The site is located near the south bank of the Red Deer River. The expected soil profile in the area consists of mostly quaternary fluvial (stream deposits) including gravel, sand, silt and clay. These deposits are overlying Cretaceous or Tertiary shale with interbedded sandstone and coal bedrock. These two units could be separated by glacial till deposits associated with the Classical Wisconsin Laurentide glaciation (A. Stalker, GSC Memoir 370, 1972).

3.2 SOILS

Asphalt approximately 50 mm in thickness was logged at the surface of Boreholes # 3 to 6. Topsoil approximately 400 to 450 millimetres in thickness was encountered at the surface of Boreholes # 1, 2, 7 & 8. Loams and silty sand fills were encountered at the site to depths ranging from 0.3 to 2.0 metres below grade in majority of the site area, however, at the location of Borehole # 2, fill with coal inclusion and rubble was encountered to a depth of 3.7 metres below grade. Silty sand and silty clay were encountered below fills at the site. A highly weathered and weak bedrock was encountered in Borehole # 5 at a depth of 11.3 metres below grade. No bedrock was logged up to depth of 15.2 metres below grade in Borehole # 2.

Note: Because surficial organic soils are affected by the erosive forces of wind and precipitation, and are redistributed by agricultural practices, the thicknesses of these soil layers can vary widely. As such, the thickness of topsoil organic browns as measured in the boreholes should not be relied upon to make estimates of stripping quantities.

Based on the soil logged in the borehole opened, the soil at the site in general consisted of:

3.2.1 Fills / loams

The site has encountered significant fill soils. Below topsoil in Boreholes # 7 & 8, a layer of black loamy soil was logged at 0.45 metres and extended to depths of 0.9 to 1.5 metres below grade. In majority of the boreholes, the silty sand fill extended to depths ranging from 0.3 to 1.2 metres below grade, however at the location of Borehole # 2, the depth of fill was 3.7 metres and at Borehole # 8, the fill below loam was 2.0 metres below grade. Trace amounts of gravel and rubble were noted within the fill soils. The deposit was observed to be of loose relative density. The fill was damp and medium brown in colour.

3.2.2 Silty Sand

Silty sand was encountered below fills and below sandy gravel (see below) at the borehole locations and extended to depths of 3.3 to 9.1 metres below existing grade. The deposit was observed to be of very loose to loose relative density as adjudged by standard penetration blow counts of 4 to 10 blows per 30 centimetres. The silty sand was damp to moist and light brown to medium brown in colour.

3.2.3 Sandy Gravel

Sandy gravel was logged in all boreholes at depths ranging from 3.3 to 4.3 metres below grade and extended to depths of 7.0 to 11.3 metres below grade. The deposit was observed to be of loose to compact relative density. The sandy gravels were damp to wet and generally medium brown in colour.

3.2.4 Silty Clay

Silty clay was logged below gravels in some of the boreholes and extended to depths ranging from 9.1 to 15.2 metres below grade below grade. The deposit was generally observed to be of firm to very stiff consistency. The clays were generally low plastic, moist to wet and medium brown to dark grey in colour.

3.2.5 Bedrock

Highly weathered shale and coal were encountered in Borehole # 5 at a depth of 11.3 metres below grade, however, no bedrock was encountered up to a depth of 15.2 metres below grade in Borehole # 2 advanced at the site. Standard penetration blow counts of 41 and 47 blows per 30 centimetres were recorded within the bedrock. The bedrock was light brown to dark grey in colour and generally damp to wet.

For more detailed soil profiles refer to the borehole logs attached.

3.3 GROUNDWATER

Groundwater seepage was encountered during monitoring and the boreholes were noted to be wet upon completion. In the boreholes, groundwater level was measured and recorded in the standpipe piezometers on September 25, 2018, at which time groundwater was detected at depths of 4.57 to 11.58 metres below ground surface. Groundwater levels fluctuate seasonally and in early September are expected to be at or near their seasonal peak in an average year.

4.0 DISCUSSION AND RECOMMENDATIONS

4.1 GENERAL

The subsurface soil conditions encountered at the site are extremely variable. Variable fills to varying depths were logged at the site. Bedrock in Borehole # 5 was logged at a depth of 11.3 metres and no bedrock was logged to a depth of 15.2 metres below grade in Borehole # 2. Topsoil, loams, fills and other deleterious material encountered at the site are not suitable to support the foundations and curling club rink slab. Deep pile foundation system and structural slab are recommended for the proposed development. The subsurface conditions below fills at the site are considered suitable for the proposed development. The geotechnical considerations at the site are summarized below:

- A deep pile foundation system such as drilled cast-in-place concrete piles or steel H-Piles driven to practical refusal within the bedrock logged at a depth of 11.5 metres below grade (in Borehole # 5, and to be confirmed in remaining areas) are feasible for the soil conditions. Bedrock depth must be confirmed during the installation or discuss variability in bedrock depth in area, known to be 11 to 15 metres in a short distance. Groundwater will likely be encountered during drilling and casing will likely be required due to the cohesionless nature of silty / sandy and gravelly soils present at the site.
- The existing fill soils are not suitable for a slab-on-grade design and structural slab supported on piles is recommended due to the differential movements that can occur in a proposed refrigerated curling slab. Slab-on-grade construction may be possible after removing the existing topsoil/loam and fill soils to an approximate depth of 2 metres and replacing the soils using well graded sandy gravels in control compacted and tested layers. After removing 2 metres of existing fill, the upper 0.3 to 0.6 metres (depending upon the disturbance to predominantly silty sand soils) shall be densified and compacted prior to placing the new fills. The new fills should be placed in layers not exceeding 200 millimetres compacted thickness and shall be compacted to 100 percent of Standard Proctor Maximum Dry Density (SPMDD). Compaction should be carried out in such a way that the result is a uniformly compacted fill layer. Existing soils after removing 2 metres of fill at the base of the excavation shall be inspected and where poor quality soils are present, undercutting and replacement will be necessary.

- Temporary excavations will need to be constructed with minimum backsloping at a gradient of 1 Horizontal to 1 Vertical (1H:1V). Additional backsloping may be required if excessive sloughing or groundwater infiltration is experienced.
- Groundwater was encountered at depths of approximately 4.5 to 5.5 metres below existing grade in majority of the boreholes. Below grade development is not anticipated for this project, minor seepage into construction excavations may need to be dewatered using a system of ditches, sumps and pumps. For drilled piles, seepage may likely be encountered within the sand and silt seams present at the site and the contractor should have casing, tremie pipes and cleaning buckets available. A subsurface weeping tile is required for any below grade development.

This list should not be considered all-inclusive and should be read in conjunction with the remainder of this report. Geotechnical foundation design parameters, slab-on-grade recommendations, groundwater concerns, and additional construction recommendations are provided in the sections below.

4.2 FOUNDATION DESIGN RESISTANCE FACTORS

Load and Resistance Factor Design (LRFD) parameters are presented below for shallow and deep foundation design. Ultimate Limit State (ULS) resistances are presented, and should be utilized with the following design formula, as per the Canadian Foundation Manual Fourth Edition 2006:

$$\Phi R_n \geq \Sigma \alpha_i S_{ni}$$

Where:

Φ	=	Geotechnical resistance factor
R_n	=	Nominal (ultimate) geotechnical resistance
α_i	=	Load safety factor determined by structural engineer
S_{ni}	=	Specified load component
i	=	Represents various types of loads

The values for load factors (α_i), geotechnical resistance factor (Φ) and load combinations are specified by applicable codes e.g. NBCC. As per the NBCC, we recommend use of the following Φ :

Table 1: Geotechnical Resistance Factors for Foundations

Description		Resistance Factor (Φ)
Shallow Foundations – vertical bearing resistance, semi-empirical analysis		0.5
Shallow Foundation – sliding		0.8
Deep Foundations		
Resistance to compressive axial load	from semi-empirical analysis	0.4
	from static loading test results	0.6
	from dynamic monitoring results (i-e, pile driving analyzer (PDA) testing	0.5
Uplift resistance	from semi-empirical analysis	0.3
	from loading test results	0.4
Horizontal Load resistance		0.5

4.3 DRILLED CAST-IN-PLACE CONCRETE PILES

Drilled cast-in-place concrete piles may be designed to resist axial compressive loads on the basis of allowable skin friction and end-bearing parameters given below. End-bearing should, however, not be taken into account for small diameter (less than 600 mm shaft diameter) piles because of the difficulties associated with ensuring a clean base.

For large diameter piles (shaft diameter 600 mm or greater), end bearing may be considered in the design if facilities are available during construction for downhole cleaning and inspection.

Drilled piles should have an overall length below finished grade of not less than 5 metres and a shaft diameter of not less than 400 mm. Pile spacing should not be closer than 2.5 pile diameters measured centre to centre. An increase capacity in the piles of 33% may be used for dynamic loading.

Under-reamed (Belled) bored cast-in-place concrete piles are not possible for this site, due to the presence of sands and gravels at the site. Casing the silty / sandy and gravelly soils will likely be necessary as these layers will be prone to sloughing. Seepage is expected within these layers. The feasibility of drilled piles should be verified, due to the likely use of casing.

Pile installation monitoring during the installation process of the piles should be undertaken to verify that the encountered soils are in accordance with the soils assumed in the design. The inspections need to be completed by the geotechnical engineer of record or their representative.

The contractor should be prepared to case all pile holes as required. Some precautions should be taken during installation:

- Contractor should have casing onsite to stabilize the hole as sloughing may become a problem.
- Contractor should have tremie pipes onsite or access to a concrete boom pump truck to allow placement of concrete through water if seepage occurs.
- Contractor should have appropriate sizes of cleaning buckets onsite to prepare the base properly.

The piles may be designed for a combination of end bearing and skin friction with the understanding that some movement of the pile is required before both skin friction and end bearing support are fully mobilized.

Pile design resistance parameters are shown in Table 4 and Table 5.

4.3.1 Pile Design Using LRFD

Table 2: ULS Pile Resistances for LRFD

Soil	Approx. Depth Below Existing Grade (m)	Unfactored Ultimate Skin Friction (kPa), R_n	Unfactored Ultimate End Bearing (kPa), R_n
Surficial Soils, Fill Soils	0 – 1.5 or to depth of fills	0	---
Silty Sand / Sandy Gravels	1.5 – 11.3	45	---
Bedrock	11.3 – 15.5	195	1950

Note: Geotechnical resistance factors for uplift and compression presented in Section 4.2 of this report should be applied to the ULS design values presented above.

The Serviceability Limit States (SLS) condition should be checked upon design of the foundation loads and pile sizes and depths.

4.3.2 Pile Design Using WSM

To undertake the foundation design using the Working Stress Method, the following allowable skin friction and end bearing parameters are provided:

Table 3: Allowable Pile Bearing Resistances for WSM

Soil	Approx. Depth Below Existing Grade (m)	Allowable Skin Friction (kPa)	Allowable End Bearing (kPa)
Surficial Soils, Fill Soils	0 – 1.5 or to depth of fills	---	---
Silty Sand / Sandy Gravels	1.5 – 11.3	15	---
Bedrock*	11.3 – 15.5*	60	600

* Top of bedrock will vary in depth across the site and must be verified prior or during the course of pile installation.

If the piles are designed for depths greater than 15.5 metres, the continuity of strata shall be verified to a depth of no less than three pile diameters below the general basing elevations of the piles. The continuity of the strata may be verified by the piling contractor by over-drilling one or more piles during the course of pile installation, as appropriate, depending upon the design installation depths used.

4.3.3 Lateral Load Soil Parameters

Detailed design of laterally loaded piles should be done using a non-linear Lateral Pile Response Model that also models eccentricity of axial loading due to lateral deflection (P- Δ effects). M•L can provide these services if requested. For preliminary lateral pile design, the coefficient of horizontal subgrade reaction which is a function of pile diameter has been calculated using the Davisson, 1970 method referenced in the Canadian Foundation Manual, 3rd Edition. The recommended values are presented in the table below where D is the pile diameter.

Table 4: Horizontal Moduli of Subgrade Reaction

Soil Type	Horizontal Modulus of Subgrade Reaction (Mpa/m)	
	Sustained Loading	Cyclic Loading
Fill Soils	4/D	2/D
Silty Sand and Sandy Gravel	12/D	6/D
Bedrock	40/D	20/D

4.3.4 Group Effects

Upon completion of the pile design, M•L should review the pile layout to ensure there are no pile group effects which will impact the design capacity of the piles.

4.4 SLIDING PARAMETERS

The unfactored ultimate limit state (ULS) coefficient of friction may be taken as 0.40. It is recommended that a geotechnical resistance factor of 0.8 be applied to the unfactored ULS Coefficient of friction as specified by the NBCC 2005.

4.5 SITE SOIL CLASSIFICATION FOR SEISMIC SITE RESPONSE

Based on the soil conditions logged at the site during this investigation, the site classification for seismic site response is considered to be "Site Class D" as per Section 4.1.8.4 of the 2014 Alberta Building Code.

4.6 SETTLEMENTS

4.6.1 Pile Foundations

The settlements in the piles will depend on the pile loads, sizes and group effects. Providing the pile tips are installed to near same elevation (within a few meters) and all piles are installed as per installation requirements and the piles are designed as per the recommendations in this report, the piles should undergo relatively uniform movement. The movement required to mobilize the skin friction along the pile shaft will be approximately 1% of the pile diameter. Additional elastic shortening of the pile should be expected. Using the design values in this report the total consolidation at the pile tip should be limited to 25mm.

In addition, both differential settlements and total settlements would also depend on the settlement needed to mobilize the required geotechnical resistance which is dependent on the effective cleaning of the base of the drilled shaft.

4.7 FLOOR SLABS

The existing fill soils on this site are not suitable for construction of slab-on-grade. A structural slab supported on piles may be considered for the site. Gravel for underslab gas depressurization systems must meet the gradation specified in the Alberta Building Code section 9.13.4. The Class IA material (drainage gravel) is a suitable material for this application, however any gravel that meets the specified gradation as well as any structural requirements may be used. An acceptable gravel will have less than 10% of the material passing a 4 mm sieve. Granular base (25 mm crush) gravel generally does not meet this requirement.

4.7.1 Slab-on-Grade

Fills were logged generally to depths of 1.2 to 2.0 metres and to 3.7 metres below grade locally in Borehole # 2 at the site. Slab-on-grade construction is considered feasible provided certain precautions are undertaken and after removing the existing topsoil/loam and fill soils to an approximate depth of 2 metres and replacing the soils by using well graded sandy gravels in control compacted and tested layers. After removing 2 metres of existing fill, the upper 0.3 to 0.6 metres (depending upon the disturbance to predominantly silty sand

soils) shall be densified and compacted prior to placing the new fills. The new fills should be placed in layers not exceeding 200 millimetres compacted thickness and shall be compacted to 100 percent of Standard Proctor Maximum Dry Density (SPMDD). Existing soils after removing 2 metres of fill at the base of the excavation shall be inspected and where poor quality soils are present, undercutting and replacement will be necessary.

Some relative movement between floor slab-on-grade and adjacent walls or foundations and differential movements within slab should be anticipated. Generally, if the recommendations outlined in this report are followed, these movements should be acceptably small. It is possible, however, that some cracking of the slab or distortion of any internal partition walls supported by the slab may occur. Such damage may be visible, particularly if a brittle surface finishing, such as ceramic tiles, is adopted. The risk of such damage should be weighed against the additional costs associated with alternative slab support systems, such as structurally supported slabs.

4.8 STRUCTURAL SLABS

A structurally supported floor slab system may be considered for the subject site due to deep variable fills encountered at the site and to avoid differential movement between the slab and adjacent walls or foundations.

With any structurally supported floor slab system, there is a risk of movement of the ground beneath the slab relative to the slab. This can lead to problems if piping and other utilities that are connected to the slab are embedded within the ground beneath the slab. All utilities beneath structurally supported ground floor slabs should be protected from the effects of such differential movement. This can be accomplished by placing utilities within boxes suspended from the structural slab.

4.9 FROST PROTECTION

The on-site silty soils encountered throughout the site should be considered very frost susceptible which will result in frost heave displacement in the soil when frozen.

4.9.1 Structures

For protection against frost action, perimeter footings or grade beams in heated structures should be extended to such depths as to provide a minimum soil cover of 1.4 metres. Exterior footings or grade beams in unheated structures should have a minimum soil cover of 2.1 metres, unless provided with equivalent insulation. Grade beams that do not have adequate soil cover for frost protection should have a minimum 100 mm void space on the underside of the grade beam to reduce the risk of interaction with the underlying soil. Any portion of the foundation that extends more than 1.0 metres from the heated structure should be considered to be an unheated foundation.

4.9.2 Surface Concrete

The surficial site soils are predominantly composed of frost susceptible soils. Therefore, some precautions should be followed for the design and construction of concrete flatworks at the site.

In all unheated areas, the site soils will likely experience some degree of heave due to frost formation during the winter months. Generally speaking, if proper consideration is given to the recommendations contained in Section 4.10, proper drainage will prevent the subgrade from becoming saturated and will help reduce the severity of frost heave. Nevertheless, concrete flatwork should be designed with anticipation of some frost heave occurring. Concrete sidewalks should be dowelled into footings or grade beams in threshold areas where heave of the concrete panels would obstruct the proper opening of the door and present a tripping hazard. As the outside edge of these panels will still heave, the panel should either be properly jointed to control crack locations, or reinforced by the placement of reinforcing steel 10 mm bars at a 300 mm spacing. The depth of the reinforcement should be controlled so that the reinforcement is properly located within the concrete panels.

Alternatively, rigid insulation can be placed below flatwork to prevent frost formation in the underlying subgrade. M•L can provide recommendations for such insulation if required.

4.10 SITE GRADING AND DRAINAGE

It is recommended that final site grading be provided to direct water to areas remote from the proposed structures. Minimum landscape gradients of 1.5 percent are recommended to reduce the risk of run-off ponding in localized areas. Driveways, parking areas or landscaping within a zone of approximately 2 m of the exterior perimeter of any structure should be graded to drain away from the structures at a minimum gradient of 2 percent. Furthermore, downspouts should be positively directed away from buildings.

All fill soils placed on site should consist of general engineered fill as per Section 4.19 of this report.

4.11 CONSTRUCTION EXCAVATIONS

The composition and consistencies of the soils encountered at the site are such that conventional hydraulic excavators should generally be able to remove the native soils.

All excavations should be carried out in accordance with Alberta Occupational Health and Safety (OH&S) Regulations. Excavations in the cohesionless sands and silts should have backsloping at a minimum gradient of 1H:1V from the base of excavation. If excessive sloughing is encountered, additional side sloping may be necessary. Should space constraints not allow adequate side sloping for the excavation to ensure a safe temporary excavation, a designed shoring system will be necessary. A qualified geotechnical engineer should review the excavation stability to ensure excavation safety prior to workers entering the excavation.

4.12 GROUNDWATER CONSIDERATIONS

Groundwater level was measured in the standpipe piezometer and recorded on September 25, 2018, at which time groundwater was detected at depths of 4.57 to 11.58 metres below ground surface. Groundwater levels fluctuate seasonally and in early September are expected to be at or near their seasonal peak in an average year. Groundwater is not expected to have a significant impact on most construction activities. Groundwater seepage will likely be encountered during pile installation and appropriate equipment including casing, tremie pipes and cleaning buckets should be available.

4.13 PERMANENT DEWATERING SYSTEM

Based on the soil and groundwater conditions observed at the site, weeping tile is not considered necessary for the proposed building with a structural slab constructed above the adjacent grade, however, weeping tile would generally be recommended for building with a basement.

The ground surface adjacent to the building must be graded so as to direct surface water away from the building.

4.14 CONCRETE

Testing for soluble sulphates indicates a negligible soluble sulphate concentration of up to 0.082 percent. Therefore, the use of Type GU (Normal Portland) cement concrete in accordance with CSA A23.1, Table 2 for F-2 exposure is suitable for all concrete in contact with the soil which these samples represent. The F-2 exposure class requires minimum 25 MPa strength at 28 days, a maximum water to cementing materials ratio of 0.55 and 4-7 percent entrained air by volume based on 14-20 mm aggregate. It is recommended that all imported soils to be utilized on site be tested for soluble sulphate concentrations.

4.15 LATERAL WALL PRESSURES

Permanent and temporary walls should be designed to resist all lateral pressures including those due to soil or backfill, surcharges, water and adjacent footings using the following expressions defined in terms of total and effective stresses:

$$P_{\text{lateral pressure}} = P'_{\text{earth+surcharge}} + P_{\text{net water}} + P'_{\text{adj ft}}$$

where

$$P_{\text{lateral pressure}} = \text{total lateral pressure at a given depth (kN/m}^2\text{)}$$

$$P'_{\text{earth+surcharge}} = \text{lateral earth pressure due to soil or fill and surcharges at a given depth (kN/m}^2\text{)}$$

$$= K (\gamma h + q) \text{ above water table or phreatic surface}$$

$$= K (\gamma' h + q) \text{ below water table or phreatic surface}$$

$P_{\text{net water}}$	=	net water pressure on wall at a given depth (kN/m^2), calculated by hand drawn flow net or computer solution based on drainage conditions
$P'_{\text{adj ft}}$	=	lateral earth pressure due to adjacent footings at given depth (kN/m^2)
K	=	coefficient of lateral earth pressure, K_a , K_o , K_p or combination of as noted below
K_a	=	coefficient of active earth pressure
K_o	=	coefficient of at-rest earth pressure
K_p	=	coefficient of passive earth pressure
γ'	=	submerged unit weight of backfill or natural soil (kN/m^3)
γ'	=	$\gamma - \gamma_w$
γ	=	bulk unit weight of backfill or natural soil (kN/m^3)
γ_w	=	unit weight of water 9.81 kN/m^3
h	=	excavation depth (m)
q	=	surcharge load (kN/m^2)

Table 5 below presents coefficients of lateral earth pressure and unit weights.

Table 5: Coefficients of Lateral Earth Pressure

	K_a	K_o	K_p	γ (kN/m^3)
Engineered Fill	0.38	0.58	2.66	22.0
Structural Fill	0.31	0.47	3.30	23.0
Native Soils	0.38	0.55	2.66	22.5

4.16 PERMANENT LATERAL WALL PRESSURES

The distribution of soil pressure against a permanent wall may be assumed using the general equation given above with a coefficient of lateral earth pressure equal to the at rest coefficient of earth pressure, $k = k_o$. Values of k_o are given above for fill and native silt and clay as permanent walls can be constructed with backfill or poured neat to temporary shoring and native soils.

Permanent walls should be designed to resist the maximum possible water pressure subject to drainage conditions determined by design.

4.17 TEMPORARY LATERAL WALL PRESSURES

The distribution of soil pressure against a temporary wall may be assumed using the general equation given above and values of K according to deformation restrictions as follows:

- If moderate wall movements can be permitted
 $K=K_a$.
- If foundations of buildings or services exist at a shallow depth, at a distance less than H (height of the wall) behind the top of the wall and not closer than 0.5H
 $K= 0.5 (K_a + K_o)$.
- If foundations or services exist at a shallow depth, at a distance less than 0.5H
 $K=K_o$.

4.18 TEMPORARY PASSIVE WALL RESISTANCE

Passive resistance at the base of a temporary wall may be calculated as follows:

$$P_p = K_p (\gamma' d / 1.5)$$

Where	P'_p	=	passive resistance at depth below excavation (kN/m ²)
	K_p	=	coefficient of passive earth pressure
	γ'	=	submerged unit weight (kN/m ³)
	d	=	depth below excavation level (m)

4.19 BACKFILL MATERIALS AND COMPACTION

The on-site materials may be suitable for use as general engineered or structural fill subject to material evaluation and removal of deleterious materials. Imported fill should be approved for use as structural or general engineered fill.

Recommended compaction specifications and materials are as follows:

- Structural fill - 100 percent Standard Proctor maximum dry density, maximum compacted lift thickness 250 mm, maximum grain size 200 mm. Structural fill materials should comprise clean well-graded inorganic granular soils.
- General engineered fill - 98 percent Standard Proctor maximum dry density, 0 to +3 percent of optimum moisture content, maximum compacted lift thickness 300 mm. General engineered fill

materials should comprise clean well-graded granular soils, or inorganic medium to low plastic cohesive soils.

Where washing of fines is possible, fill material placed should be separated from coarser or finer material by a suitable geotextile.

Backfill comprising cohesive soils should be considered frost susceptible and should not be used in areas where it may become frozen and where frost heaving would be unacceptable.

5.0 REVIEW OF DESIGN AND CONSTRUCTION

M•L should review details of the design and specifications related to geotechnical aspects prior to construction. Adequate monitoring during construction will be required. All construction should be carried out by a qualified contractor experienced in foundation and earthworks construction. Adequate monitoring includes:

- Shallow Foundations - Inspection by a qualified geotechnical engineer prior to placement of footings.
- Earthworks - Full-time monitoring and compaction testing.
- Deep Utility Installation – Full-time monitoring and compaction testing.

All monitoring should be carried out by a qualified person, independent of the contractor. M•L will provide these services if requested. Failure to provide an adequate level of foundation monitoring may be contravention of building code requirements.

5.1 DESIGN AND CONSTRUCTION GUIDELINES

Recommended general design and construction guidelines are provided in Appendix B under the following headings:

- Backfill Materials and Compaction
- Proof-Rolling
- Construction Excavations
- Floor Slabs-On-Grade
- Shallow Foundations
- Bored Cast-in-Place Concrete Piles

These guidelines are intended to present standards of good practice. Although supplemental to the main text of this report, they should be interpreted as part of the report. Design recommendations presented herein are based on the premise that these guidelines will be followed. The design and construction guidelines are not intended to represent detailed specifications for the work, although they prove useful in

the preparation of such specifications. In the event of any discrepancy between the main text of this report and Appendix B, the main text should govern.

6.0 LIMITATIONS

Recommendations presented herein are based on a geotechnical evaluation of the findings in eight boreholes. The conditions encountered during the fieldwork are considered to be reasonably representative of the site. If, however, conditions other than those reported are noted during subsequent phases of the project, M•L should be notified and given the opportunity to review our current recommendations in light of new findings. This report does not include any recommendations related to contaminants in soil or groundwater. Should there be any other documentation indicating any excavation or land disturbance, such as environmental reports, M•L would require these reports prior to site development to confirm the recommendations within this report are suitable in light of new information.

This report has been prepared for the exclusive use of GEC Architecture and their agents for specific application to the development described in this report. It has been prepared in accordance with generally accepted soil and foundation engineering practices. No warranty is expressed or implied.

The Town of Drumheller shall at all times be irrevocably and unconditionally entitled to fully rely on this report as an addressee and party to the report, including all attachments, drawings and schedules, in each case notwithstanding any provision, disclaimer or waiver in the report to the contrary.

The Town of Drumheller shall be entitled to provide copies of the report to Town Council and Town of Drumheller employees, Town of Drumheller regulatory boards, affiliates, advisors, consultants, lenders, and assignees, each of whom shall also be similarly entitled to fully rely on the report in their official capacities for the specific purpose for which the report was prepared.

The Town of Drumheller is at all times entitled to provide copies of the report to Alberta Environment and any other governmental authorities and regulatory bodies having jurisdiction. The Town of Drumheller may also contact the author or other parties to the report to obtain further information respecting the report or to discuss the report further.

7.0 CLOSURE

We trust information presented herein meets with your present requirements. If you have questions or require additional geotechnical services please contact our office.

Respectfully submitted,

McIntosh•Lalani Engineering Ltd.


A circular seal for the Professional Engineer of Alberta. The outer ring contains the text "PROFESSIONAL ENGINEER ALBERTA". The inner ring contains the name "ASAD SHAIKH". The center of the seal features a stylized figure holding a scale, with a banner below it containing the letters "P.E.". A blue ink signature is written across the seal, and the date "July 9, 2019" is written in blue ink to the right of the seal.

Asad Shaikh, P.Eng.
Senior Project Engineer

A circular seal for the Professional Engineer of Alberta. The outer ring contains the text "PROFESSIONAL ENGINEER ALBERTA". The inner ring contains the name "MARTIN D. WARD". The center of the seal features a stylized figure holding a scale, with a banner below it containing the letters "P.E.". A blue ink signature is written across the seal, and the date "July 8, 2019" is written in blue ink to the right of the seal.

Marty D. Ward, P.Eng.
Director of Engineering
APEGA Permit No. 8482


Drawings & Figures

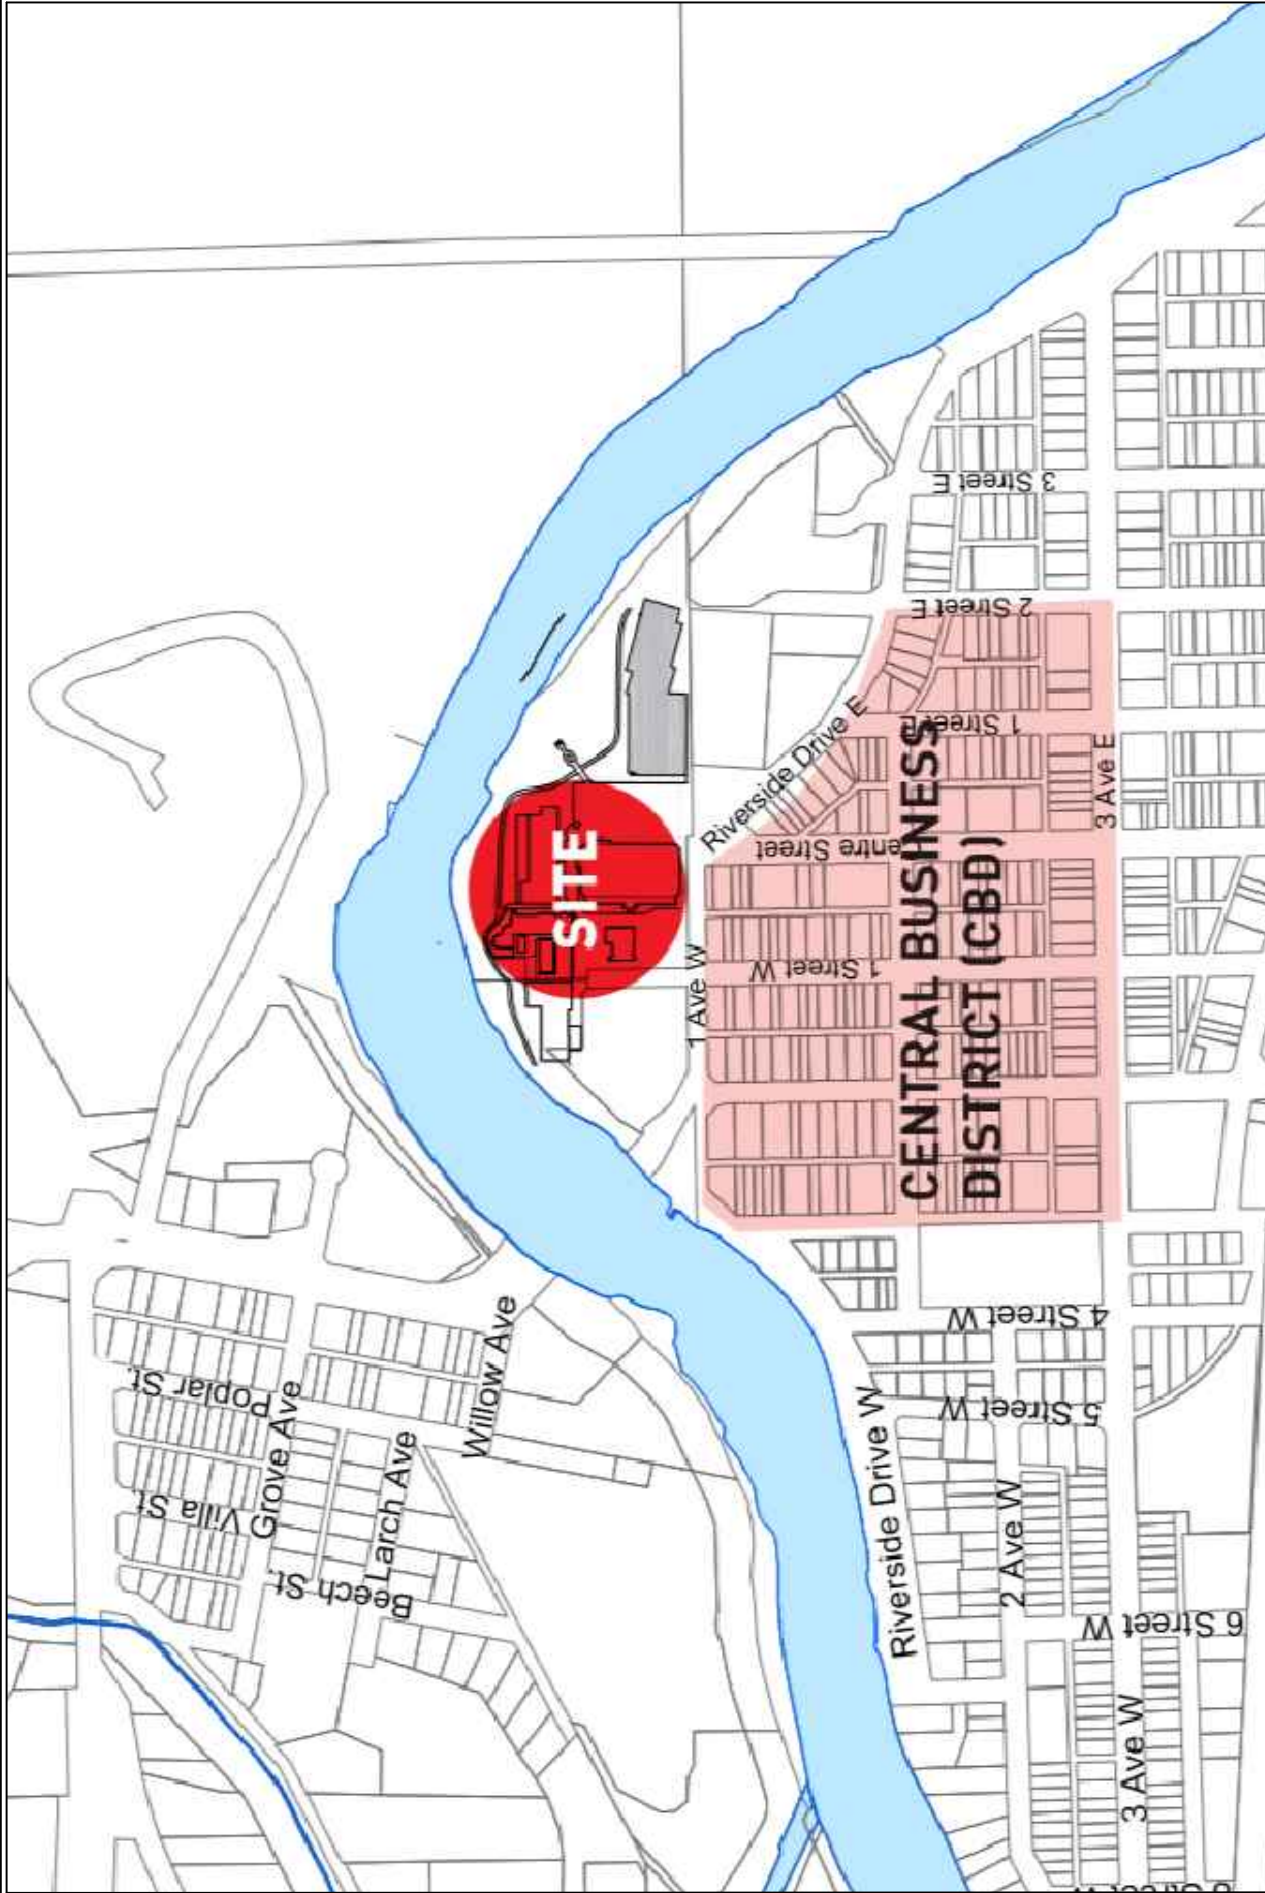


Client: GEC Architecture Ltd.
 Project: Drumheller Curling Club
 Title: Viscinity Map

Job Number: ML-8855
 Drawing Number: 8855.00.G100
 Scale: N.T.S.
 Date: October 11, 2018



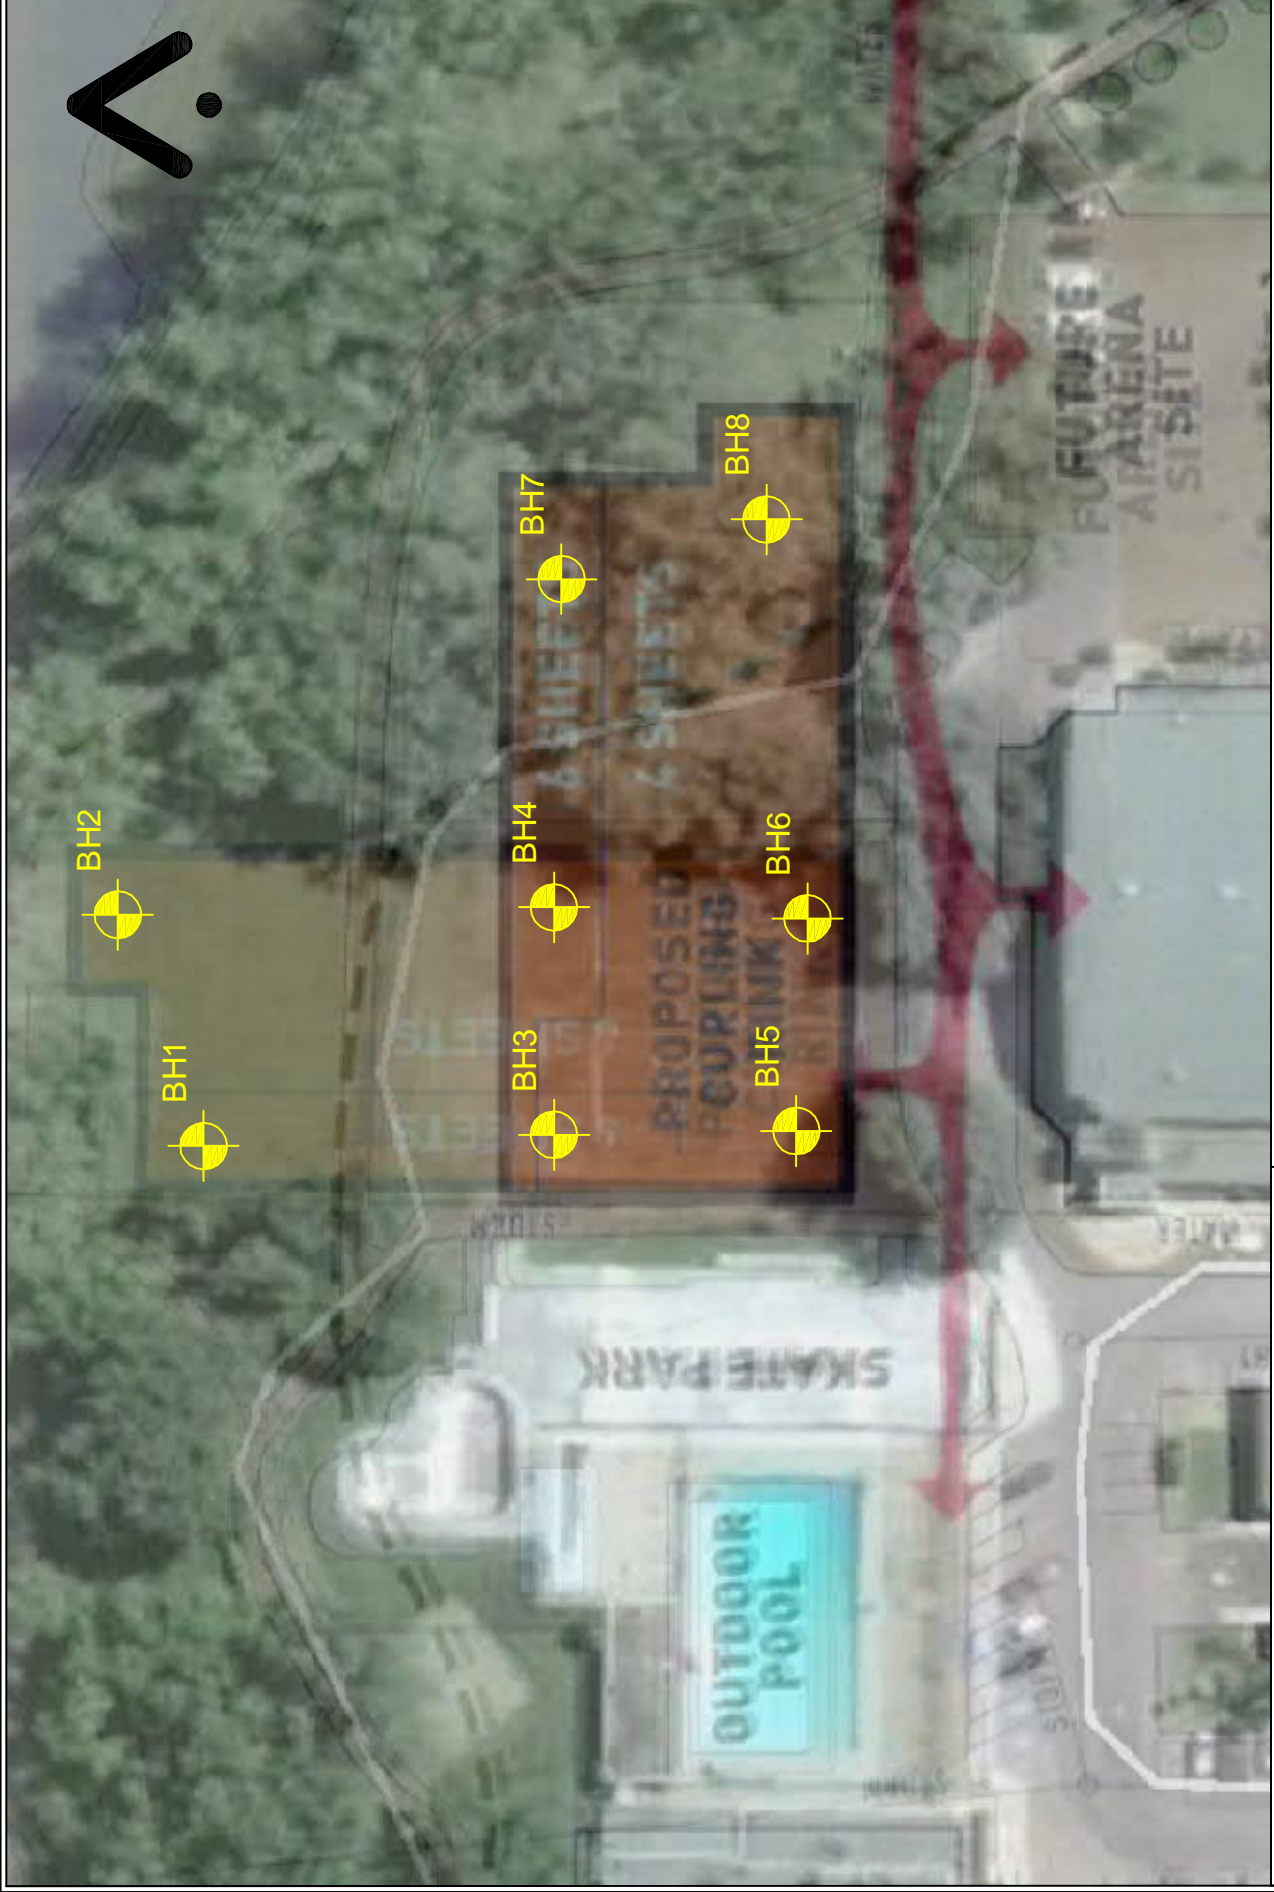

Client:	GEC Architecture Ltd.		
Project:	Drumheller Curling Club		
Title:	Borehole Locations		
	Job Number:	Drawing Number:	Date:
	ML-8855	8855.00.G101	October 11, 2018
		Scale:	N.T.S.
	 McINTOSH • LALANI ENGINEERING LTD.		

Appendix A

Borehole Logs

Project: Drumheller Curling Club		Drilling Information:		Borehole No.:1													
Client: GEC Architecture Ltd.		All Service Drilling Inc		Project No.:ML-8855													
		CME 55 track SS-Auger		Elevation:Existing Grade													
SAMPLE TYPE		SHELBY TUBE		CORE SAMPLE		SPT SAMPLE		GRAB SAMPLE		AUGER SAMPLE		NO RECOVERY					
BACKFILL TYPE		BENTONITE		PEA GRAVEL		SLOUGH		GROUT		DRILL CUTTINGS		SAND					
Depth (m)	SOIL SYMBOL	SOIL DESCRIPTION	SAMPLE TYPE	SAMPLE NO	USCS	BLOWS /150 mm	PLASTIC		M.C.		LIQUID		POCKETPEN (KPa)	OTHER DATA	Well 1" SLOTTED PIEZOMETER	Elevation (m)	
							10	20	30	40	80	160					240
0		TOPSOIL - dark brown organics, trace rubble approx. 450 mm thick.			TPSL												
0.5		Silty SAND - fine grain, loose, damp, trace coal, light to medium brown.		1-1													
1		- trace roots.		1-2		6.8											
2		- trace clay, moist, trace oxides.		1-3	SM	7.8											
3				1-4													
4		Sandy GRAVEL - coarse grain, fine gravel, well sorted, compact, moist, medium brown.		1-5		2-2-3				24.1							
5		- coarse gravel, wet.		1-6													
6				1-7		8-16-12				12.4							
7				1-8													
8		- trace organics, med grey.		1-9	GWS	5-14-20				16.7							
9				1-10													
10				1-11		11-15-13				19.0							
11				1-12													
		END OF HOLE at a depth of 9.1 m. Slough to a depth of 6.1 m. 25 mm PVC standpipe installed to a depth of 9.1 m with 3.0 m slotted. Wet upon completion.															
		Water Levels: Sept 25, 2018: 4.67 m EOH: 8.80 m															

ML STANDARD AUGER 8855 DRUMHELLER CURLING CLUB GPJ M-L STANDARD.GDT 7-9-19



McIntosh Lalani Engineering
Calgary, AB
(403) 291-2345

Logged By: RC
Reviewed By: Asad Shaikh
Groundwater Depth: m

Completion Depth: 30 ft
Drilled on: 2018-09-14
Page 1 of 1

Project: Drumheller Curling Club		Drilling Information:		Borehole No.:2									
Client: GEC Architecture Ltd.		All Service Drilling Inc		Project No.:ML-8855									
		RK-10 SS-Auger		Elevation:Existing Grade									
SAMPLE TYPE		<input checked="" type="checkbox"/> SHELBY TUBE	<input checked="" type="checkbox"/> CORE SAMPLE	<input checked="" type="checkbox"/> SPT SAMPLE	<input type="checkbox"/> GRAB SAMPLE	<input type="checkbox"/> AUGER SAMPLE	<input type="checkbox"/> NO RECOVERY						
BACKFILL TYPE		<input checked="" type="checkbox"/> BENTONITE	<input type="checkbox"/> PEA GRAVEL	<input type="checkbox"/> SLOUGH	<input type="checkbox"/> GROUT	<input checked="" type="checkbox"/> DRILL CUTTINGS	<input type="checkbox"/> SAND						
Depth (m)	SOIL SYMBOL	SOIL DESCRIPTION	SAMPLE TYPE	SAMPLE NO	USCS	BLOWS /150 mm	BLOW COUNT		OTHER DATA	Well '2' SLOTTED PIEZOMETER	Well '2-B' SLOTTED PIEZOMETER	Elevation (m)	
							10	20					30
						PLASTIC	M.C.	LIQUID					
						10	20	30	40				
								POCKETPEN (kPa)					
						80	160	240	320				
0		TOPSOIL - dark brown organics, trace rubble approx. 400 mm thick.		2-1	TPSL								
1		Silty Sand FILL - fine grain, loose, damp, medium brown. - coal approx. 150 mm thick, trace rubble, trace gravel, trace roots.		2-2	FILL	3-3-2	4.7			Organic Content = 2.6%			
2		trace oxides, trace clay.		2-3									
3		Silty SAND - fine grain, loose, wet, trace oxides, trace roots, medium brown.		2-4			14.8						
4		Sandy GRAVEL - coarse grain, well sorted, wet, medium brown/orange. - no recovery in split spoon.		2-5		2-3-4	22.2			[SO ₄] = 0.041%			
5		- no recovery in split spoon.		2-6	SM		7.8						
6		Silty CLAY (Till) - trace sand and gravel, soft, wet, low plastic, trace oxide, trace coal, medium brown.		2-7									
7		Silty SAND - trace gravel, some clay, loose, wet, medium blue/grey.		2-8	GWS	6-9-9	11.9						
8		Silty CLAY (Till) - trace sand and gravel, stiff, moist-wet, low plastic, trace coal, medium blue/grey.		2-9	CL-ML	7-10-9							
9		- medium to high plastic, damp, medium grey. - no recovery in split spoon.		2-10	SM	3-3-6	17.9						
10				2-11									
11				2-12			23.5						
12				2-13									
13				2-14		9-10-15	27.2						
14				2-15			16.5						
15				2-16	CL-ML	3-6-7							
16				2-17		4-5-7	28.2						
17				2-18									
18				2-19		3-6-8	27.7						
19				2-20									
20													
21													
22													
23													

ML STANDARD AUGER 8855 DRUMHELLER CURLING CLUB.GPJ M-L STANDARD_GDT 7-9-19

END OF HOLE at a depth of 15.2 m. Slough to a depth of 11.8 m. 25 mm PVC standpipe installed to a depth of 14.4 m with 1.5 m slotted. Wet upon completion.

WELL B: 25 mm PVC standpipe installed, (nested with 1 in same well) to a depth of 7.6 m with 1.5 m slotted. Wet upon completion.

Water Levels:
Sept 25, 2018: 11.58 m EOH:
12.78 m

Well B:
Sept 25, 2018: 6.12 m EOH:
7.57 m



McIntosh Lalani Engineering
Calgary, AB
(403) 291-2345

Logged By: RC
Reviewed By: Asad Shaikh
Groundwater Depth: m

Completion Depth: 50 ft
Drilled on: 2018-09-13
Page 1 of 1

Project: Drumheller Curling Club		Drilling Information:		Borehole No.:3			
Client: GEC Architecture Ltd.		All Service Drilling Inc		Project No.:ML-8855			
		CME 55 track SS-Auger		Elevation:Existing Grade			
SAMPLE TYPE		<input checked="" type="checkbox"/> SHELBY TUBE	<input type="checkbox"/> CORE SAMPLE	<input type="checkbox"/> SPT SAMPLE	<input type="checkbox"/> GRAB SAMPLE	<input type="checkbox"/> AUGER SAMPLE	<input type="checkbox"/> NO RECOVERY
BACKFILL TYPE		<input checked="" type="checkbox"/> BENTONITE	<input type="checkbox"/> PEA GRAVEL	<input type="checkbox"/> SLOUGH	<input type="checkbox"/> GROUT	<input type="checkbox"/> DRILL CUTTINGS	<input type="checkbox"/> SAND

Depth (m)	SOIL SYMBOL	SOIL DESCRIPTION	SAMPLE TYPE	SAMPLE NO	USCS	BLOWS /150 mm	PLASTICITY INDEX		POCKETPEN (kPa)	OTHER DATA	Well 3' SLOTTED PIEZOMETER	Elevation (m)
							PL	LI				
0		ASPHALT - approx. 50 mm thick.			ASPH							
0-1		Silty Sand FILL - trace gravel, trace clay, loose, damp, trace rubble, dark brown.		3-1	FILL							
1-2		Silty SAND - medium grain, trace clay, loose, damp, light to medium brown. - trace organics in split spoon.		3-2		1-1-3		21.4				
2-3		- trace organics in split spoon.		3-3	SM							
3-4		- compact, moist.		3-4		3-5-11		14.6				
4-5		Sandy GRAVEL - coarse grain, well sorted, compact, damp, medium brown, dark orange.		3-5								
5-6		- trace cobbles, wet.		3-6		15-20-21		10.2				
6-7				3-7	GWS							
7-8		Silty SAND - fine grain, trace clay, loose, wet, medium grey.		3-8		3-8-13		12.9				
8-9				3-9								
9-10				3-10				22.5				
10-11				3-11		1-4-4						
11				3-12	SM			27.8				
		<p>END OF HOLE at a depth of 9.1 m. Slough to a depth of 6.1 m. 25 mm PVC standpipe installed to a depth of 6.1 m with 3.0 m slotted. Wet upon completion.</p> <p>Water Levels: Sept 25, 2018: 4.57 m EOH: 5.92 m</p>										

ML STANDARD AUGER 8855 DRUMHELLER CURLING CLUB.GPJ M-L STANDARD.GDT 7-9-19



McIntosh Lalani Engineering
Calgary, AB
(403) 291-2345

Logged By: RC	Completion Depth: 30 ft
Reviewed By: Asad Shaikh	Drilled on: 2018-09-14
Groundwater Depth: m	Page 1 of 1

Project: Drumheller Curling Club			Drilling Information:			Borehole No.:4					
Client: GEC Architecture Ltd.			All Service Drilling Inc			Project No.:ML-8855					
			CME 55 track SS-Auger			Elevation:Existing Grade					
SAMPLE TYPE		<input checked="" type="checkbox"/> SHELBY TUBE	<input type="checkbox"/> CORE SAMPLE	<input checked="" type="checkbox"/> SPT SAMPLE	<input checked="" type="checkbox"/> GRAB SAMPLE	<input type="checkbox"/> AUGER SAMPLE	<input type="checkbox"/> NO RECOVERY				
BACKFILL TYPE		<input checked="" type="checkbox"/> BENTONITE	<input type="checkbox"/> PEA GRAVEL	<input type="checkbox"/> SLOUGH	<input type="checkbox"/> GROUT	<input checked="" type="checkbox"/> DRILL CUTTINGS	<input type="checkbox"/> SAND				
Depth (m)	SOIL SYMBOL	SOIL DESCRIPTION	SAMPLE TYPE	SAMPLE NO	USCS	BLOWS /150 mm	PLASTICITY INDEX		OTHER DATA	Well 4" SLOTTED PIEZOMETER	Elevation (m)
							PLASTIC	LIQUID			
							10	40			
							80	320			
0		ASPHALT - approx. 50 mm thick.			ASPH						
0		Silty Sand FILL - trace gravel, trace clay, loose, damp, trace rubble, dark brown.	<input checked="" type="checkbox"/>	4-1	FILL						
0.5		Silty SAND - fine grain, loose, damp, trace roots, light brown.	<input checked="" type="checkbox"/>	4-2		2-2-2	12.9				
1.5		- trace clay, moist.	<input checked="" type="checkbox"/>	4-3							
2.0			<input checked="" type="checkbox"/>	4-4			23.9				
3.0			<input checked="" type="checkbox"/>	4-5	SM	3-2-3	21.7				
4.5		Sandy GRAVEL - coarse grain, well sorted, compact, damp, medium brown, dark orange.	<input checked="" type="checkbox"/>	4-6							
5.0		- wet, trace cobbles.	<input checked="" type="checkbox"/>	4-7		11-20-18	9.8				
5.5			<input checked="" type="checkbox"/>	4-8	GWS						
6.5		Silty SAND - fine grain, trace gravel, loose, wet, medium grey/green.	<input checked="" type="checkbox"/>	4-9		24-11	15.4				
7.5			<input checked="" type="checkbox"/>	4-10							
8.0			<input checked="" type="checkbox"/>	4-11	SM	3-4-5	26.3				
9.0		- trace organics.	<input checked="" type="checkbox"/>	4-12			20.5				
9.1		END OF HOLE at a depth of 9.1 m. Slough to a depth of 6.1 m. 25 mm PVC standpipe installed to a depth of 7.0 m with 3.0 m slotted. Wet upon completion.									
		Water Levels: Sept 25, 2018: 5.08 m EOH: 6.92 m									

ML STANDARD AUGER 8855 DRUMHELLER CURLING CLUB.GPJ M-L STANDARD.GDT 7-9-19



McIntosh Lalani Engineering
Calgary, AB
(403) 291-2345

Logged By: RC

Reviewed By: Asad Shaikh

Groundwater Depth: m

Completion Depth: 30 ft

Drilled on: 2018-09-14

Page 1 of 1

Project: Drumheller Curling Club		Drilling Information:		Borehole No.:5								
Client: GEC Architecture Ltd.		All Service Drilling Inc		Project No.:ML-8855								
		CME 55 track SS-Auger		Elevation:Existing Grade								
SAMPLE TYPE		SHELBY TUBE		CORE SAMPLE								
BACKFILL TYPE		BENTONITE		PEA GRAVEL								
		SPT SAMPLE		GRAB SAMPLE								
		AUGER SAMPLE		NO RECOVERY								
		SLOUGH		GROUT								
		DRILL CUTTINGS		SAND								
Depth (m)	SOIL SYMBOL	SOIL DESCRIPTION	SAMPLE TYPE	SAMPLE NO	USCS	BLOWS /150 mm	PLASTIC M.C. LIQUID		POCKETPEN (kPa)	OTHER DATA	Well 'S' SLOTTED PIEZOMETER	Elevation (m)
							10 20 30 40	80 160 240 320				
0		ASPHALT - approx. 50 mm thick.			ASPH							
0-1		Silty Sand FILL - trace gravel, trace clay, loose, damp, trace rubble, dark brown.		5-1	FILL							
1		Silty SAND - fine grain, loose, damp, trace roots, light brown.		5-2		6.5				Organic Content = 2.4%		
1-2				5-3		9.4						
2				5-4	SM	2-2-2						
2-3		- trace clay, moist.		5-5		16.5						
3				5-6								
3-4				5-7		8-15-15				[SO ₄] = 0.082%		
4		Sandy GRAVEL - coarse grain, well sorted, compact, damp, medium brown, dark orange.		5-8	GWS	8.0						
4-5		- wet, trace cobbles, trace organics.		5-9		13.7						
5				5-10	SM	7-7-8						
5-6				5-11		34.2						
6		Silty SAND - fine grain, some clay, loose, wet, medium grey.		5-12	GWS	20-15-15						
6-7		Sandy GRAVEL - coarse grain, well sorted, compact, damp, trace cobbles, medium brown, dark orange.		5-13		6.4						
7		- no recovery in split spoon, no recovery on auger.		5-14		21.3						
7-8		- no recovery on auger.		5-15	BE	6-7-10						
8		Shale BEDROCK - weathered, weak, damp, light grey.		5-16		8.4						
8-9				5-17	BE	24-25-16						
9		Coal BEDROCK - weathered weak, wet, black.		5-18		23.8						
9-10						35.0						
10												
10-11												
11												
11-12												
12												
12-13												
13												
13-14												
14												
14-15												
15												
15		END OF HOLE at a depth of 13.7 m. Slough to a depth of 6.1 m. 25 mm PVC standpipe installed to a depth of 8.2 m with 3.0 m slotted. Wet upon completion.										
		Water Levels: Sept 25, 2018: 5.46 m EOH: 8.25 m										

ML STANDARD AUGER 8855 DRUMHELLER CURLING CLUB.GPJ M-L STANDARD.GDT 7-8-19



McIntosh Lalani Engineering
Calgary, AB
(403) 291-2345

Logged By: RC

Reviewed By: Asad Shaikh

Groundwater Depth: m

Completion Depth: 45 ft

Drilled on: 2018-09-14

Page 1 of 1

Project: Drumheller Curling Club		Drilling Information:		Borehole No.:6			
Client: GEC Architecture Ltd.		All Service Drilling Inc		Project No.:ML-8855			
		CME 55 track SS-Auger		Elevation:Existing Grade			
SAMPLE TYPE		<input checked="" type="checkbox"/> SHELBY TUBE	<input type="checkbox"/> CORE SAMPLE	<input checked="" type="checkbox"/> SPT SAMPLE	<input type="checkbox"/> GRAB SAMPLE	<input type="checkbox"/> AUGER SAMPLE	<input type="checkbox"/> NO RECOVERY
BACKFILL TYPE		<input checked="" type="checkbox"/> BENTONITE	<input type="checkbox"/> PEA GRAVEL	<input type="checkbox"/> SLOUGH	<input type="checkbox"/> GROUT	<input checked="" type="checkbox"/> DRILL CUTTINGS	<input type="checkbox"/> SAND

Depth (m)	SOIL SYMBOL	SOIL DESCRIPTION	SAMPLE TYPE	SAMPLE NO	USCS	BLOWS /150 mm	PLASTICITY INDEX		POCKETPEN (kPa)	OTHER DATA	Well 6" SLOTTED PIEZOMETER	Elevation (m)
							PL	LI				
0		ASPHALT - approx. 50 mm thick.			ASPH FILL							
0-1		Silty Sand FILL - trace gravel, trace clay, loose, damp, trace rubble, dark brown.		6-1	SM							
1-2		Silty SAND - fine grain, loose, damp, trace roots, light brown.		6-2	SM	3-4-3	10.6					
2-3				6-3	SM							
3-4		- trace clay.		6-4	SM	3-4-6	21.5					
4-5		Sandy GRAVEL - coarse grain, well sorted, compact, damp, medium brown, dark orange.		6-5	SM							
5-6		- wet, trace cobbles.		6-6	SM	10-14-16	8.4					
6-7				6-7	GWS		13.3					
7-8				6-8	GWS	7-12-12						
8-9		Silty CLAY - trace gravel, low plastic, firm, wet, medium grey. no recovery in split spoon.		6-9	SM		18.8					
9-10				6-10	SM	5-3-3	30.1					
9.1		END OF HOLE at a depth of 9.1 m. Slough to a depth of 6.1 m. 25 mm PVC standpipe installed to a depth of 6.1 m with 3.0 m slotted. Wet upon completion.										
		Water Levels: Sept 25, 2018: 5.38 m EOH: 6.07 m										

ML STANDARD AUGER 8855 DRUMHELLER CURLING CLUB.GPJ M-L STANDARD.GDT 7-9-19



McIntosh Lalani Engineering
Calgary, AB
(403) 291-2345

Logged By: RC	Completion Depth: 30 ft
Reviewed By: Asad Shaikh	Drilled on: 2018-09-14
Groundwater Depth: m	Page 1 of 1

Project: Drumheller Curling Club		Drilling Information:		Borehole No.:7			
Client: GEC Architecture Ltd.		All Service Drilling Inc		Project No.:ML-8855			
		RK-10 SS-Auger		Elevation:Existing Grade			
SAMPLE TYPE		<input checked="" type="checkbox"/> SHELBY TUBE	<input type="checkbox"/> CORE SAMPLE	<input type="checkbox"/> SPT SAMPLE	<input type="checkbox"/> GRAB SAMPLE	<input type="checkbox"/> AUGER SAMPLE	<input type="checkbox"/> NO RECOVERY
BACKFILL TYPE		<input checked="" type="checkbox"/> BENTONITE	<input type="checkbox"/> PEA GRAVEL	<input type="checkbox"/> SLOUGH	<input type="checkbox"/> GROUT	<input type="checkbox"/> DRILL CUTTINGS	<input type="checkbox"/> SAND

Depth (m)	SOIL SYMBOL	SOIL DESCRIPTION	SAMPLE TYPE	SAMPLE NO	USCS	BLOWS /150 mm	PLASTICITY INDEX		POCKETPEN (kPa)	OTHER DATA	Well 7' SLOTTED PIEZOMETER	Elevation (m)
							PLASTIC	LIQUID				
0		TOPSOIL - dark brown organics, trace rubble approx. 450 mm thick. over clayey silt loam		7-1	TPSL							
1		Silty SAND - trace gravel, loose, damp, trace roots, light brown.		7-2								
2		- trace coal.		7-3		2-3-3						
3				7-4	SM							
4				7-5		3-3-4						
5		Sandy GRAVEL - coarse grain, well sorted, compact, wet, trace cobbles, medium brown, dark orange.		7-6								
6				7-7		5-10-13						
7		Silty CLAY - trace sand and gravel, soft, moist, low plastic, medium brown.		7-8	GWS							
8				7-9	CL-ML	3-4-4						
9		Sandy GRAVEL - some clay, coarse, compact, medium brown.		7-10								
10		Silty CLAY - trace sand and coarse gravel, stiff, moist, low plastic, medium grey.		7-11	GWS	9-8-10						
11		- no recovery in split spoon.		7-12								
12				7-13		5-6-6						
13		- no recovery in split spoon.		7-14	CL-ML	4-6-8						
14		END OF HOLE at a depth of 12.2 m. Slough to a depth of 10.6 m. 25 mm PVC standpipe installed to a depth of 12.2 m with 3.0 m slotted. Wet upon completion.										
		Water Levels: Sept 25, 2018: 9.68 m EOH: 11.82 m										

ML STANDARD AUGER 8855 DRUMHELLER CURLING CLUB.GPJ M-L STANDARD.GDT 7-9-19



McIntosh Lalani Engineering
Calgary, AB
(403) 291-2345

Logged By: RC

Reviewed By: Asad Shaikh

Groundwater Depth: m

Completion Depth: 40 ft

Drilled on: 2018-09-13

Page 1 of 1

Project: Drumheller Curling Club		Drilling Information:		Borehole No.:8										
Client: GEC Architecture Ltd.		All Service Drilling Inc		Project No.:ML-8855										
		CME 55 track SS-Auger		Elevation:Existing Grade										
SAMPLE TYPE		SHELBY TUBE		CORE SAMPLE		SPT SAMPLE		GRAB SAMPLE		AUGER SAMPLE		NO RECOVERY		
BACKFILL TYPE		BENTONITE		PEA GRAVEL		SLOUGH		GROUT		DRILL CUTTINGS		SAND		
Depth (m)	SOIL SYMBOL	SOIL DESCRIPTION	SAMPLE TYPE	SAMPLE NO	USCS	BLOWS /150 mm	PLASTIC M.C. LIQUID		BLOW COUNT		POCKETPEN (kPa)	OTHER DATA	Well 8" SLOTTED PIEZOMETER	Elevation (m)
							10 20 30 40	10 20 30 40	10 20 30 40	80 160 240 320				
0		TOPSOIL - dark brown organics, trace rubble approx. 450 mm thick.			TPSL									
0.5		LOAM - clayey silt loam, trace to some gravel, black brown		8-1	OR									
1.5		Silty Sand FILL - trace gravel, trace clay, loose, damp, dark brown		8-2	FILL	3-3-4	10.2							
2.0		Silty SAND - trace clay, loose, damp, trace roots, medium brown.		8-3	SM									
3.5		Sandy GRAVEL - medium grain, well sorted, compact, moist, medium brown.		8-4		3-3-6	7.8							
4.5				8-5										
5.0				8-6		12-14-18	11.3							
5.5				8-7	GWS									
7.5				-		1-1-2								
7.8		Silty SAND - trace gravel, trace clay, dense, wet, trace coal, medium grey.		8-8	SM		28.2							
8.0		Silty CLAY (Till) - trace sand and gravel, stiff, moist, low plastic, medium grey.		-		7-6-6								
8.5		- no recovery in split spoon.		8-9	CL-M									
9.1		END OF HOLE at a depth of 9.1 m. Slough to a depth of 3.9 m. 25 mm PVC standpipe installed to a depth of 9.1 m with 3.0 m slotted. Wet upon completion.												
		Water Levels: Sept 25, 2018: 5.30 m EOH: 8.94 m												

ML STANDARD AUGER 8855 DRUMHELLER CURLING CLUB GPJ M-L STANDARD.GDT 7-9-19



McIntosh Lalani Engineering
Calgary, AB
(403) 291-2345

Logged By: RC
Reviewed By: Asad Shaikh
Groundwater Depth: m

Completion Depth: 30 ft
Drilled on: 2018-09-14
Page 1 of 1

Appendix B

Design & Construction Guidelines

B.1 BACKFILL MATERIALS AND COMPACTION	I
B.1.1 GENERAL ENGINEERED FILL	I
B.1.2 STRUCTURAL FILL	I
B.1.3 LEAN MIX CONCRETE	II
B.1.4 LANDSCAPE FILL	II
B.1.5 PIPE BEDDING AND DRAINAGE	III
B.2 BORED CAST-IN-PLACE CONCRETE PILES	IV
B.3 CONSTRUCTION EXCAVATIONS	VII
B.4 FLOOR SLABS-ON-GRADE	VII
B.5 PROOF-ROLLING	IX
B.6 SHALLOW FOUNDATIONS	X
B.7 DRIVEN STEEL PILES	XI

B.1 BACKFILL MATERIALS AND COMPACTION

Maximum density, as used in this section, means Standard Proctor Maximum Dry Density (ASTM Test D698) unless otherwise noted. Optimum moisture content is as defined in this text.

Backfill adjacent to exterior footings, foundation walls, grade beams and pile caps and within 300 mm of final grade should comprise low-plastic cohesive general engineered fill as defined above. Such backfill should provide a relatively impervious surface layer to reduce seepage in the sub-soil.

Backfill should not be placed against a foundation structure until the structure has sufficient strength to withstand the earth pressures resulting from placement and compaction. During compaction, careful observation of the foundation wall for deflection should be carried out continuously. Where deflection is apparent, the compactive effort should be reduced accordingly. In order to reduce potential compaction induced stresses, only hand held compaction equipment should be used in the compaction of fill within 500 mm of retaining walls or basement walls.

Backfill materials should not be placed in a frozen state or placed on a frozen subgrade. All lumps of materials should be broken down during placement.

Where the maximum-sized particles in any backfill material exceed 50 percent of the lift thickness or minimum dimension of the cross-section to be backfilled, such particles should be removed and placed at other more suitable locations on site or screened-off prior to delivery to site.

Bonding should be provided between backfill lifts, if the previous lift has become desiccated. For fine-grained materials, the previous lift should be scarified to 75 mm in depth followed by proper moisture conditioning and recompaction.

B.1.1 GENERAL ENGINEERED FILL

Backfill adjacent to and above footings, abutment walls, basement walls, grade beams and pile caps or below highway, street or parking lot pavement sections should comprise general engineered fill. "General engineered fill" materials should comprise clean, well-graded granular soils or inorganic, low-plastic cohesive soils. Such material should be placed in lifts not exceeding an uncompacted thickness of 300 mm, and compacted to not less than 98 percent of maximum density, at a moisture content at or slightly above optimum. The uncompacted lift thickness may be adjusted based on the method of fill placement and the size and type of compaction equipment in use.

B.1.2 STRUCTURAL FILL

Backfill supporting structural loads should comprise structural fill materials. "Structural fill" materials should comprise clean, well-graded inorganic granular soils. Such fill should be placed in compacted lifts

not exceeding 150 mm and compacted to not less than 98 percent of maximum density, at a moisture content at or slightly (0 to 3 percent) above optimum. The following table provides gradation limits for structural fill of various nominal sizes. The gradation limits have been adapted from the City of Calgary Roads Construction 2015 Standard Specifications, Section 303.00.00 Materials. Other gradations may be approved on a project specific basis by a qualified geotechnical engineer.

Sieve Size (mm)	Percent Passing By Weight		
	Nominal Gravel Size		
	80 mm	50 mm	25 mm
80	100		
75	---		
50	---	100	
40	60 - 90	95 - 100	
25	---	---	100
20	40 - 70	50 - 75	95 - 100
10	25 - 60	25 - 52	55 - 80
5	15 - 45	15 - 40	35 - 65
2.5	10 - 35	10 - 33	28 - 52
0.63	5 - 23	5 - 23	13 - 35
0.315	---	---	9 - 26
0.16	3 - 12	2 - 14	6 - 18
0.08	2 - 10	1 - 10	4 - 10
%Fractures (2 faces)	20	30	60

B.1.3 LEAN MIX CONCRETE

"Lean-mix concrete" should be low strength concrete having a minimum 28 days compressive strength of 3.5 MPa.

B.1.4 LANDSCAPE FILL

"Landscape fill" material may comprise soils without regard to engineering quality. Such soils should be placed in compacted lifts not exceeding 300 mm and compacted to a density of not less than 90 percent of maximum density.

B.1.5 PIPE BEDDING AND DRAINAGE

Bedding for pipes and utilities should generally conform to the manufacturer's specification. The type and depth of bedding material relative to the size of pipe are a function of the rigidity of the utility and the embedment depth. For drainage blankets and weeping tile, an open-graded, clean aggregate is required. The following table represents the gradation limits for bedding gravel. The gradation limits have been adapted from the City of Calgary Standard Specifications: Sewer Construction 2012 Section 402.10.00. Class IA material as defined in the table is also suitable for use in drainage applications. Local municipal specifications or manufacturer's specifications may be substituted at the discretion of a qualified engineer.

Sieve Size (mm)	For Pipe 375 mm and Smaller (20 mm Nominal Size) % passing by mass	Sieve Size (mm)	For Pipe Larger than 375 mm (40 mm Nominal Size) % passing by mass
Class IA*			
20	100	40	100
4.75	0 - 10	4.75	0 - 10
2.5	0 - 5	2.5	0 - 5
0.075	0 - 5	0.075	0 - 5
Class IB			
20	100	40	100
4.75	10 - 50	4.75	10 - 50
2.5	0 - 5	2.5	0 - 5
0.075	0 - 5	0.075	0 - 5
Class II			
20	100	40	100
4.75	0 - 100	4.75	0 - 100
0.075	0 - 12	0.075	0 - 12
Class III			
20	100	40	100
4.75	0 - 100	4.75	0 - 100
0.075	12 - 50	0.075	12 - 50

* Class IA material is suitable for granular material below slabs-on-grade for which a subfloor depressurization system is required for soil gas control, as specified in section 9.16.2.1 of the 2014 Alberta Building Code Volume 2.

B.2 BORED CAST-IN-PLACE CONCRETE PILES

Design and construction of piles should comply with relevant Building Code requirements.

Piles should be installed under full-time inspection of geotechnical personnel. Pile design parameters should be reviewed in light of the findings of the initial bored shafts drilled on a site. Further design review may be necessary if conditions observed during site construction do not conform to design assumptions.

Where fill material, lenses or strata of sand, silt or gravel are present within the designed pile depth, these may be incompetent and/or water bearing and may cause sloughing. Casing should be on hand before drilling starts and be used, if necessary, to seal water and/or prevent sloughing of the hole.

If piles are to be under-reamed (belled), the under-reams should be formed entirely in self-supporting soil and entirely within the competent bearing stratum. Where caving occurs at design elevation, it may be necessary to extend the base of the pile bell to a greater depth. Piles may be constructed with bell having outside diameters up to approximately three times the diameters of their shafts. Piles with shaft diameters of less than 760 mm should not be under-reamed due to difficulties associated with ensuring a clean base.

Prior to pouring concrete, bottoms of pile bells or of straight-shaft end-bearing piles should be cleaned of all disturbed material.

Pile excavation should be visually inspected after completion to ensure that disturbed materials and/or water are not present on the base so that recommended allowable bearing and skin friction parameters may apply.

Visual inspection may be accomplished by the inspector descending into the pile shaft [shaft diameter of 760 mm (30 inches) or greater]. A protective cage and other safety equipment required by government regulations should be provided by the contractor to facilitate down hole inspection.

Other procedures to inspect the pile shafts may be used where shaft diameters of less than 760 mm (30 inch) are constructed, such as inspection with a light.

For safety reasons, where hand cleaning and/or "down shaft" inspection by personnel are required, the pile shaft should be cased full-length prior to personnel entering the shaft.

Reinforcing steel should be on hand and should be placed as soon as the bore has been completed and approved.

Longitudinal reinforcing steel is recommended to counteract the possible tensile stresses induced by frost action and should extend to a minimum depth of 3.5 m. A minimum steel of 0.5 percent of the gross shaft area is recommended.

Where a limited quantity of water is present on the pile base, when permitted or directed by a geotechnical engineer, it should be either removed or absorbed by the addition of dry cement, which should then be thoroughly mixed as an in situ slurry by means of the belling tool, using reverse rotation of the tool. Where significant quantities of water are present and it is impracticable to exclude water from the pile bore, concrete should be placed by tremie techniques or concrete pump.

A "dry" pile should be poured by "free fall" of concrete only where impact of the concrete against the reinforcing cage, which can cause segregation of the concrete, will not occur. A hopper should be used to direct concrete down the centre of the pile base and to prevent impact of concrete against reinforcing steel.

Concrete used for dry piles should be self-compacting and should have a slump of between 50 mm and 130 mm. Concrete for each pile should be poured in one continuous operation and should be placed immediately after excavation and inspection of piles, to reduce the opportunity for the ingress of free water or deterioration of the exposed soil or rock.

If piles cannot be formed in dry conditions, then the concrete should be placed by tremie tube or concrete pump. Concrete placed by tremie should have a slump of not less than 150 mm. A ball or float should be used in the tremie tube to separate the initial charge of concrete from the water in the pile hole.

The outlet of the tremie tube should be maintained at all times 1.0 m to 2.0 m below the surface of the concrete. The diameter of the tremie tube should be at least 200 mm. The tube should be water-tight and not be made of aluminum. Smaller diameter pipes may be used with a concrete pump. The surface of the concrete should be allowed to rise above the cut-off level of the pile, so that when the temporary casing is withdrawn and the surface level of the concrete adjusts to the new volume, the top of the uncontaminated concrete is at or above the cut-off level. The concrete should be placed in one continuous, smooth operation without any halts or delays. Placing the lower portion of the pile by tremie tube and placing the upper portion of the pile by free fall should not be permitted, to ensure that defects in the pile shaft at the top of the tremie concrete do not occur.

As the surface of the concrete rises in the pile bore, the water in the pile bore will be displaced upwards and out of the top of the pile casing. It may be necessary to pump off this water to a container to temporary ditch drain to prevent the formation of ice or flooding conditions and possibly damage to existing structures.

When concreting by tremie techniques, allowance should be made for the removal of contaminated or otherwise defective concrete at the tops of the piles.

The casing should be filled with concrete and then the casing should be withdrawn smoothly and continuously.

Sufficient concrete should be placed to allow for additional volume of the casing and reduction in level of the concrete as the casing is withdrawn. Concrete should not be poured on top of previously poured concrete after the casing is withdrawn.

An accurate record of the volume of concrete placed should be maintained as a check that a continuous pile has been formed.

Concrete should not be placed if its temperature is less than 5°C or exceeds 30°C or if it is more than two hours old.

Where tension, horizontal or bending moment loading on the pile is foreseen, steel reinforcing should be extended and tied into the grade beam or pile cap. The steel should be designed to transfer loads to the required depth in the pile and to resist resultant bending moments and shear forces.

Void formers should be placed beneath all grade beams to reduce the risk of damage due to frost effects or soil moisture changes.

Where the drilling operation might affect the concrete in adjacent pile (ie. where pile spacing is less than about three diameters), drilling should not be carried out before the previously poured pile concrete has set for at least 24 hours.

Where a group of four or more piles are used, the allowable working load on the piles may need to be modified to allow for group effects.

Piles should be spaced no closer than 2.5 times the pile shaft diameter, measured centre-to-centre. Strict control of pile location and vertically should be exercised to provide accurate locations and spacing of piles. In general, piles should be constructed within a tolerance of 75 mm plan distance in any direction and within a vertically of 1 in 75 mm.

A detailed record should be kept of pile construction including information such as pile number, shaft/base diameter, date and time bored, date and time concreted, elevation of piling platform, depths (from piling platform level) to pile base and to concrete cut-off level, length of casing used, detailed of reinforcement, brief description of soils encountered in the bore and details of any unusual occurrences during construction.

If a large number of piles are to be installed, it may be possible to optimize the design on the basis of pile load test.

B.3 CONSTRUCTION EXCAVATIONS

Construction should be in accordance with good practice and comply with the requirements of the responsible agencies.

All excavations greater than 1.5 m deep should be sloped or shored for worker protection.

Shallow excavations up to 3 m depth may use temporary side slopes of 1H:1V. A flatter slope of 2H:1V should be used if groundwater is encountered. Localized sloughing can be expected from these slopes.

Deep excavations or trenches may require temporary support if space limitations or economic considerations preclude the use of sloped excavations.

For excavations greater than 3 m depth, temporary support should be designed by a qualified geotechnical engineer. The design and proposed installation and construction procedures should be submitted to McIntosh•Lalani Engineering Ltd. for review.

The construction of a temporary support system should be monitored. Detailed records should be taken of installation methods, materials, in situ conditions and the movement of the system. If anchors are used, they should be load tested. McIntosh•Lalani Engineering Ltd. can provide further information on monitoring and testing procedures, if required.

Attention should be paid to structures or buried service lines close to the excavation. For structures, a general guideline is that if a line projected down at 45° from a horizontal, from the base of foundations of adjacent structures, intersects the extent of the proposed excavation, then these structures may require underpinning or special shoring techniques to avoid damaging earth movements. The need for any underpinning or special shoring techniques and the scope of monitoring required can be determined when details of the service ducts and vaults, foundation configuration of existing buildings and final design excavation levels are known.

No surface surcharges should be placed closer to the edge of the excavation than a distance equal to the depth of the excavation, unless the excavation support system has been designed to accommodate such surcharge.

B.4 FLOOR SLABS-ON-GRADE

All soft, loose or organic material should be removed from beneath slab areas. If any local hard spots such as old basement walls are revealed beneath the slab area, these should be over-excavated and removed to not less than 0.9 m below underside of slab level. The exposed soil should be proof-rolled and the final grade restored by general engineered fill placement. If proof-rolling reveals any soft or loose spots, these

should be excavated and the desired grade restored by general engineered fill placement. Proof-rolling should be carried out in accordance with the recommendations given elsewhere in this Appendix. The subgrade should be compacted to a depth of not less than 0.3 m to density of not less than 95 percent Standard Proctor Maximum Dry Density (ASTM Test Method D698).

If for economic reasons, it is considered desirable to leave low quality material in place beneath a slab-on-grade, special ground treatment procedures may be considered. McIntosh•Lalani Engineering Ltd. could provide additional advice on this aspect, if required.

A leveling course of at least 150 mm in compacted thickness is recommended directly beneath all slabs-on-grade. For slabs in buildings requiring a subfloor depressurization system for soil gas control, the underslab gravels should consist of an open graded clean gravel with limited fine grained inclusions to allow free flow of gasses. The Class IA material (drainage gravel) is a suitable material for this application. Where these gravels are placed on top of fine grained soils, a geotextile filter fabric should be placed between the gravel and subgrade soils. Geotextile filter fabric is also recommended between the gravels and the polymer vapour barrier to protect the polymer from punctures. Where no subfloor depressurization system is required, the levelling course may consist of structural fill. Alternatively, a minimum thickness of 150 mm of pit-run gravel overlain by a minimum thickness of 50 mm of crushed gravel may be used. Very coarse material (larger than 25 mm diameter) should be avoided directly beneath the slabs-on-grade to limit potential stress concentrations within the slab.

General engineered fill, structural fill, pit-run gravel and crushed gravel are defined under the heading "Backfill Materials and Compaction" elsewhere in this Appendix.

The slab should be structurally independent from walls and columns supported on foundations. This is to reduce any structural distress that may occur as a result of differential soil movements. If it is intended to place any internal non-load bearing partition walls directly on a slab-on-grade, such walls should be structurally independent from other elements of the building founded on a conventional foundation system so that some relative vertical movement of the walls can occur freely.

The excavated subgrade beneath slabs-on-grade should be protected at all times from rain, snow, freezing temperatures, excessive drying and the ingress of free water. This applies during and after the construction period.

A minimum slab concrete thickness of 100 mm is recommended. Control joints should be provided in all slabs. Typically for a 125 mm slab thickness, control joints should be placed on a 3 m square grid, should be sawn to a depth of one-quarter the slab thickness and have a width of approximately 3 mm.

Wire mesh reinforcement, 150 mm square grid, should be provided to reduce the possibility of uncontrolled slab cracking. The mesh should be adequately supported and should be located at or above mid-height of the slab with adequate cover.

B.5 PROOF-ROLLING

Proof-rolling is method of detecting soft areas in an "as-excavated" subgrade for fill, pavement, floor or foundations or detecting non-uniformity of compacted embankment. The intent is to detect soft areas or areas of low shear strength not otherwise revealed by means of test holes, density testing or visual examination of the site surface and to check that any fill placed or subgrade meets the necessary design strength requirements.

Proof-rolling should be observed by qualified geotechnical personnel.

Proof-rolling is generally accomplished by the use of a heavy (15-60 tonne) rubber-tired roller having four wheels abreast on independent axles with high contact wheel pressures [inflation pressures ranging from 550 kPa (80 psi) up to 1,030 kPa (150 psi)].

A heavily-loaded truck may be used in lieu of the equipment described in the paragraph above. The truck should be loaded to approximately 10 tonnes (22,000 lbs) per axle and a minimum tire pressure of 550 kPa (80 psi).

Ground speed to be maximum of 8 km/hr (133 m/min) (5 mph) (400 ft/min). Recommended speed is 4 km/hr (65 m/min) (2.5 mph) (200 ft/min).

The recommended procedure is two complete coverages with the Proof-rolling equipment in one direction and a second series of two coverages made at right angles to the first series; one "coverage" means that every point of the proof-rolled surface has been subjected to the tire pressure of a loaded wheel. Less rigorous procedures may be acceptable under certain conditions subject to the approval of an engineer.

Any soft areas rutted or displaced materials detected should be either recompacted with additional fill or the existing material removed and replaced with general engineered fill or properly moisture conditioned as necessary.

The surface of the grade under the action of the proof-rolled should be observed, noting visible deflection and rebound of the surface or shear failure in the surface of granular soils as ridging between wheel tracks.

If any part of an area indicates significantly more distress than other parts, the cause should be investigated, by, for example, shallow auger holes.

In the case of granular subgrades, distress will generally consist of either compression due to insufficient compaction or shearing under the tires. In the first case, proof-rolling should be continued until no further compression occurs. In the second case, the tire pressure should be reduced to a point where the subgrade can carry the load without significant deflection and subsequently, gradually increased to its specified pressure as the subgrade increases in shear strength under this compaction.

B.6 SHALLOW FOUNDATIONS

Design and construction of shallow foundations should comply with relevant Building Code requirements.

The term “shallow foundations” includes strip and spread footings, mat slab and raft foundations.

Minimum footing dimensions in plan should be 0.45 m for strip footings and 0.9 m for square footings.

No loose, disturbed or sloughed material should be allowed to remain in open foundation excavations. Hand cleaning should be undertaken to prepare an acceptable bearing surface. Recomaction of disturbed or loosened bearing surface may be required.

Foundation excavation and bearing surfaces should be protected from rain, snow, freezing temperatures, drying and the ingress of free water, during and after footing construction.

Footing excavations should be carried down into the designated bearing stratum.

After the bearing surface is approved, a mud slab should be poured to protect the soil and provide a working surface for construction, should immediate foundation construction not be intended.

All constructed foundations should be placed on unfrozen soils, which should be at all times protected from frost penetration.

All foundation excavations and bearing surface should be observed by a qualified geotechnical engineer to confirm that the recommendations contained in this report have been followed and that soil conditions are consistent with those assumed in the design.

Where over-excavation has been carried out through a weak or unsuitable stratum in order to reach a suitable bearing stratum; or where a foundation pad is to be placed above stripped natural ground surface, lean-mix concrete or structural fill may be used to reinstate the grade. These materials are defined under the separate heading “Backfill Materials and Compaction.”

B.7 DRIVEN STEEL PILES

Full time observation of pile driving should be carried out by qualified geotechnical personnel.

Piles should initially be designed for minimum section and embedment on the basis of static design loads and shaft resistance.

Final design of driven steel piles could be carried out using a wave equation analysis. Design by this method would enable an optimum match of hammer type and weight to pile type and soil conditions and allow a check to be made on driving stresses.

Nominal Pile Size	Approximate Driving Energy	Final Set Blows Per 25 mm (1") For Last 25 mm (1")
250 mm (10")	37,000 J (27,500 ft.lbs)	20
	55,000 J (40,000 ft.lbs)	15
360 mm (14")	55,000 J (40,000 ft.lbs)	20

Steel piles should conform to the requirements of the applicable Building Code. When steel pipe piles are filled with concrete, it should conform to the requirements of the applicable Building Code, but should be of sufficient slump (150 mm or greater) to prevent voids forming and its consistency should be such as to prevent segregation.

Driving records should be kept for each pile. Information to be recorded should include pile dimensions, hammer type, rated energy, ram weight, cap block weight and type, anvil weight, number of blows for each 0.3 m of penetration and final set.

The elevation of the tops of driven piles should be measured immediately after driving. If uplift occurs in any piles during the driving of adjacent piles, the displaced piles should be re-driven to at least their previous final elevation and final set.

Piles should be spaced no closer than 2.5 times the pile diameter, measured centre-to-centre. Where piles are driven in groups, they should be driven from the centre outwards. In general, all piles in a group should be driven to approximately the same tip elevation.

If a group of four or more piles is required, group effects may reduce the working load of the pile group below calculated from the number of piles multiplied by the working load for an individual pile. If required, McIntosh•Lalani Engineering Ltd. can provide further design parameters for this case at the final design stage.

Strict control of pile location and orientation should be exercised to obtain accurate pile installation. Pre-boring of the surficial soils may be necessary to ensure proper location of the pile tip.

When piles are to be driven into very hard or frozen strata or boulders, special tips or pre-boring may be required.

For piles which will displace a significant amount of soil during driving, such as closed-end pipe piles, care should be taken that the driving will not cause strains of such magnitude as to cause damage to nearby structures.

Pile driving may result in significant vibrations which may be unacceptable for adjacent structures. In areas where this is a concern, continuous monitoring of vibrations induced in adjacent structures by a seismograph is recommended in order to assess the potential for damage and the need for modification of procedures.

If a large number of piles are to be installed, it may be possible to optimize the design on the basis of pile load tests.

February 21, 2019

M•L 8855

GEC Architecture

Suite 300, 2207 4 Street SW

Calgary, AB T2S 1X1

Attention: Mr. Robert (Bob) Stirling (bob.stirling@gecarchitecture.com)

**Subject: Laboratory Testing Results
Drumheller Curling Club
Calgary, Alberta**

Laboratory testing of select soil samples recovered from the Drumheller Curling Club site has been completed. Natural moisture contents are presented on the attached updated borehole logs, as well as, organic contents and soluble sulphate contents.

1.0 CONCRETE

Testing for soluble sulphates indicates a negligible soluble sulphate concentration of up to 0.082 percent. Therefore, the use of Type GU (Normal Portland) cement concrete in accordance with CSA A23.1, Table 2 for F-2 exposure is suitable for all concrete in contact with the soil which these samples represent. The F-2 exposure class requires minimum 25 MPa strength at 28 days, a maximum water to cementing materials ratio of 0.55 and 4-7 percent entrained air by volume based on 14-20 mm aggregate.

It is recommended that all imported soils to be utilized on site be tested for soluble sulphate concentrations.

2.0 SOIL ERODIBILITY

M•L has conducted laboratory testing and calculated soil erodibility factors (K-values) for the surficial soils within the subject site for use in an Erosion and Sedimentation Control (ESC) plan. The K-values were calculated in accordance with the RUSLEFAC guidelines¹ using two (2) pairs of hydrometer and organic content test results obtained on borehole Sample 2-2 and Sample 5-2. The samples were obtained from the surficial silty sand soils at an approximate depth of 1.07 m.

The particle size distribution of the soils was obtained using the hydrometer method. The hydrometer results are attached. The USDA classification scheme was used for differentiating silts and sand when

¹ Wall, G.J., D.R. Coote, E.A. Pringle and I.J. Shelton (editors). 2002. RUSLEFAC — Revised Universal Soil Loss Equation for Application in Canada: A Handbook for Estimating Soil Loss from Water Erosion in Canada. Research Branch, Agriculture and Agri-Food Canada. Ottawa. Contribution No. AAFC/AAC2244E. 117 pp.

determining the soil structure and permeability classes from the Erodibility Worksheet. Sample 2-2 and Sample 5-2 were classified as a 'Sandy Loam' (USDA) due to its elevated sand content, coupled with a balanced clay and silt content. The percentage of very fine sands (0.05 - 0.10 mm) was added to percent silt for application to the nomograph in Drawing 8855.00.B01.

The soil erodibility K-values for the sample were determined graphically (refer to Drawing 8855.00.B01) and is listed below:

Sample No.	Soil Class (USDA)	Percentage Composition, normalized to passing 2 mm sieve				Structure Class	Perm. Class	Organics (%)	K-value
		Clay	Silt	Very Fine Sand	Other Sand				
2-2	Sandy Loam	10.2	22.4	20.0	47.4	2	2	2.6	0.028
5-2	Sandy Loam	11.0	21.0	21.9	46.1	2	2	2.4	0.029

The graphically determined K-values are considered to represent the most erodible soil types on site likely to be exposed during rough grading. Furthermore, these soils are considered suitable as engineered fill soils for rough grading. Thus, an average K-value of 0.029 that represents the typical result from our experience in the area can be considered suitable for application in the ESC plan for the project site.

3.0 CLOSURE

We trust the information presented meets with your present requirements. Should you have questions please contact our office.

Respectfully submitted,

McIntosh•Lalani Engineering Ltd.




Brian Tingley, E.I.T
Junior Project Engineer

/bt




Asad Shaikh, P.Eng.
Geotechnical Project Engineer

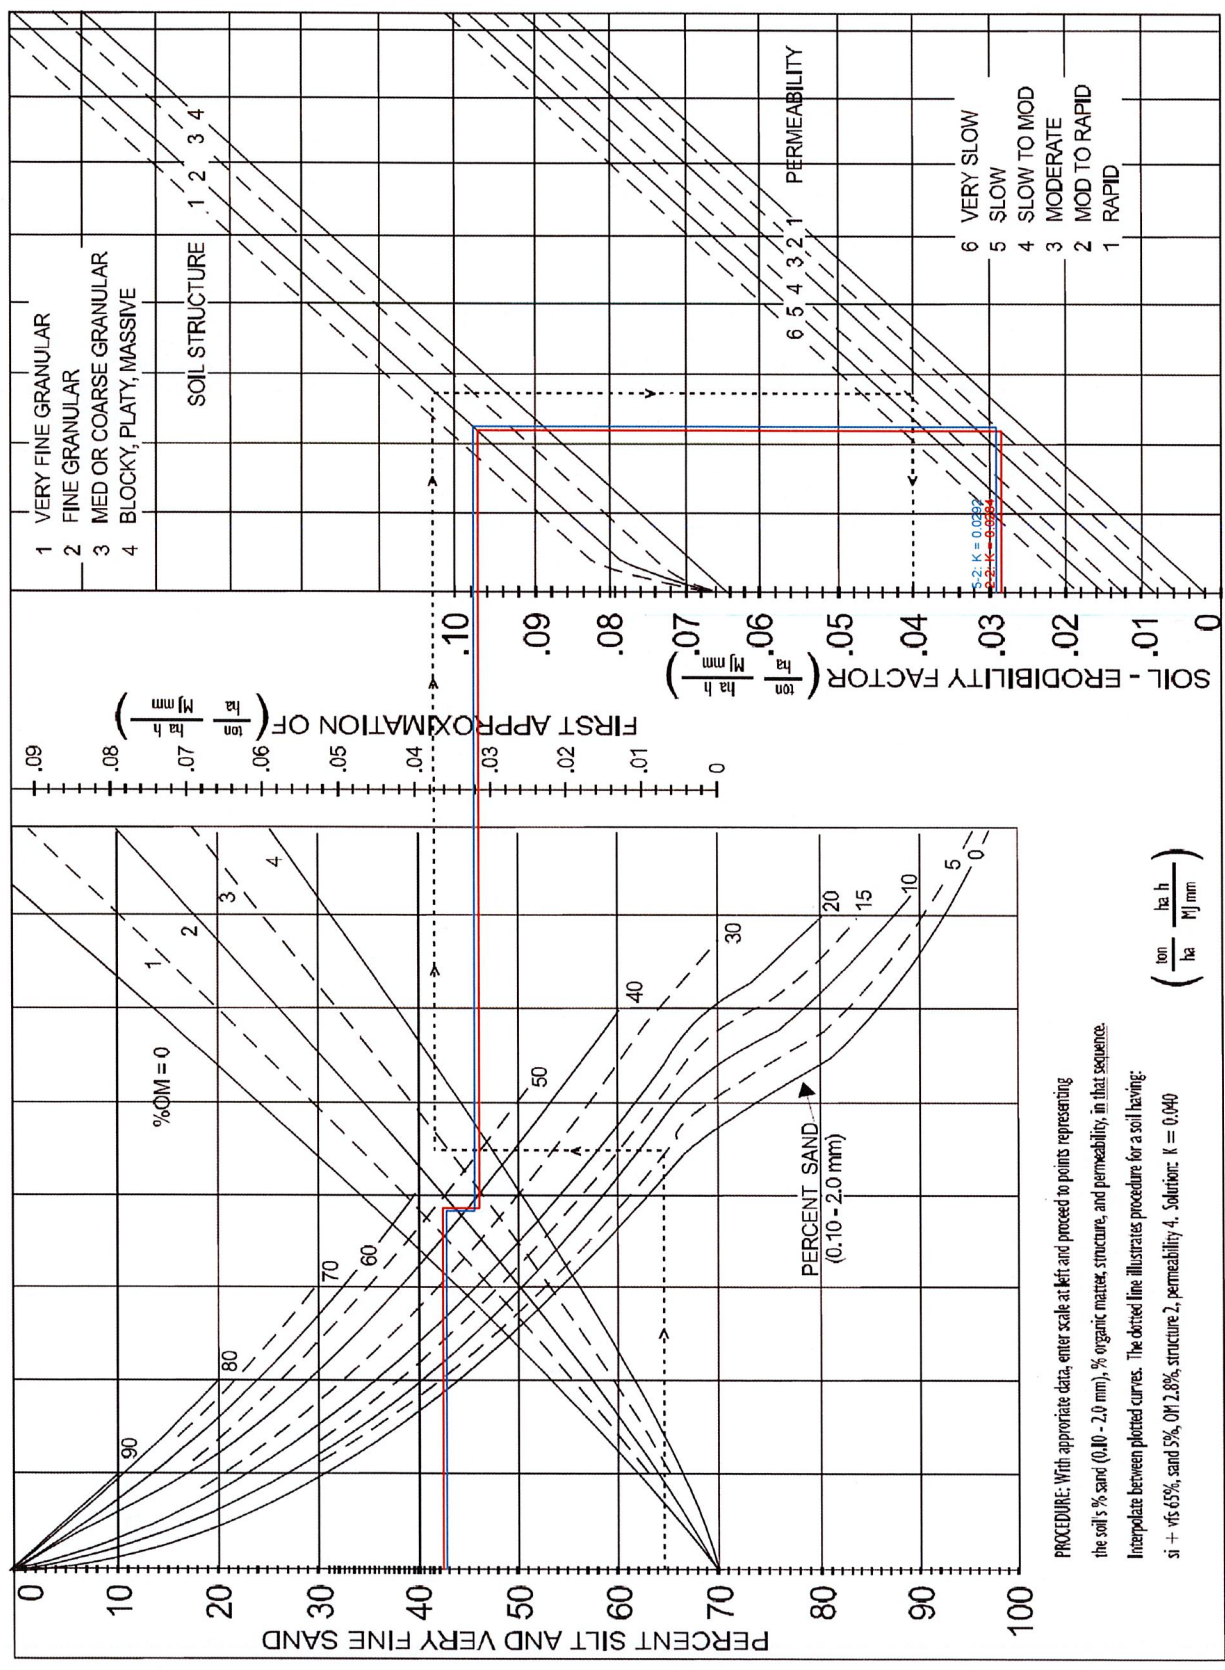


PROCEDURE: With appropriate data, enter scale at left and proceed to points representing the soil's % sand (0.10 - 2.0 mm), % organic matter, structure, and permeability, in that sequence. Interpolate between plotted curves. The dotted line illustrates procedure for a soil having: si + vts 65%, sand 5%, OM 2.8%, structure 2, permeability 4. Solution: $k = 0.040$

GEC Architecture		McINTOSH • LALANI ENGINEERING LTD.	
Drumheller Curling Club		Job Number: ML-8855	Drawing Number: 8855.00.B01
Soil Erodibility Nomograph		Scale: N.T.S.	Date: January 9, 2018

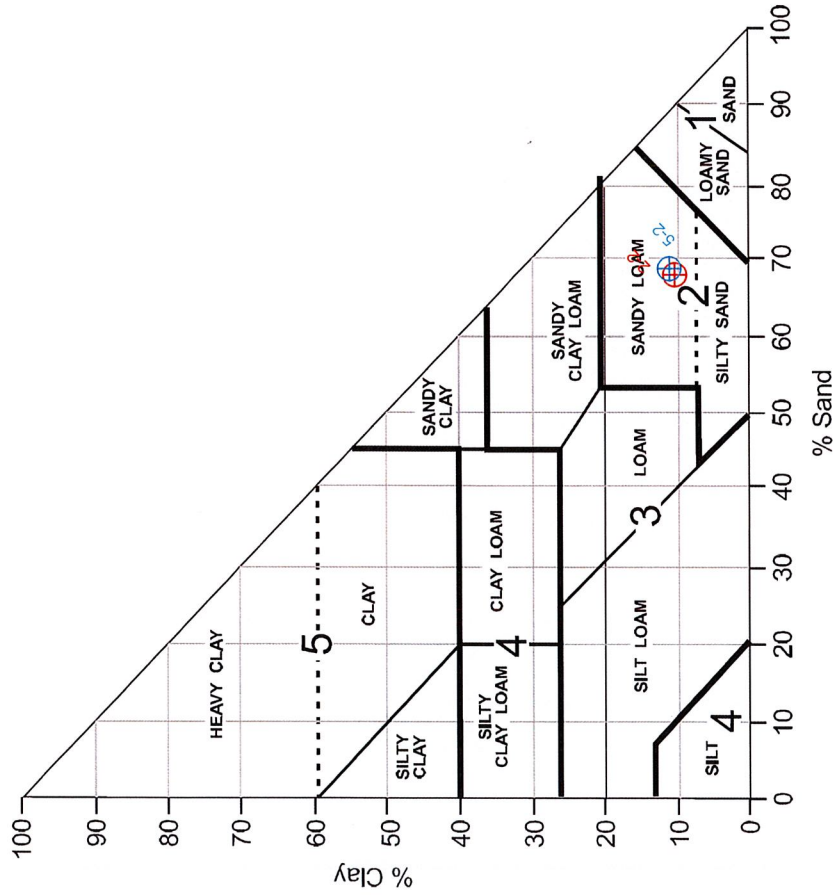

a) Soil Texture Classification

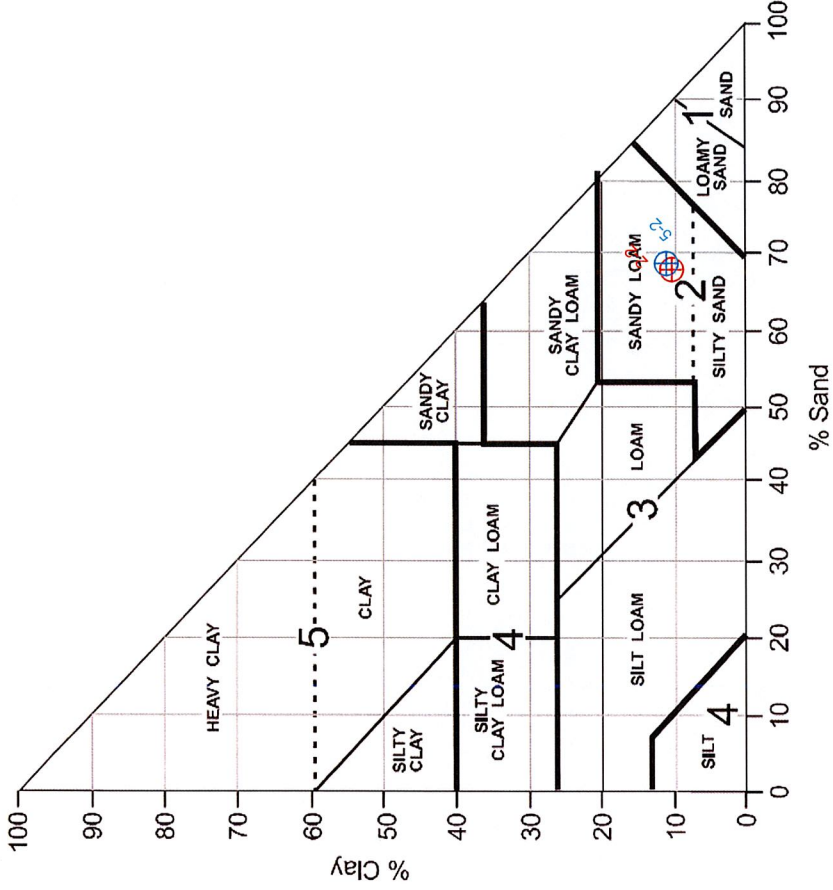

b) Soil Permeability Classification

Client: GEC Architecture

Project: Drumheller Curling Club

Title: Soil Texture & Permeability Classes



McINTOSH • LALANI ENGINEERING LTD.

Job Number

ML-8855

Drawing Number

8855.00.B02

Scale:

N.T.S.

Date:

January 9, 2018




ERODIBILITY WORKSHEET

CLIENT GEC Architecture Ltd.

PROJECT NAME Drumheller Curling Club

PROJECT NUMBER ML-8855

PROJECT LOCATION _____

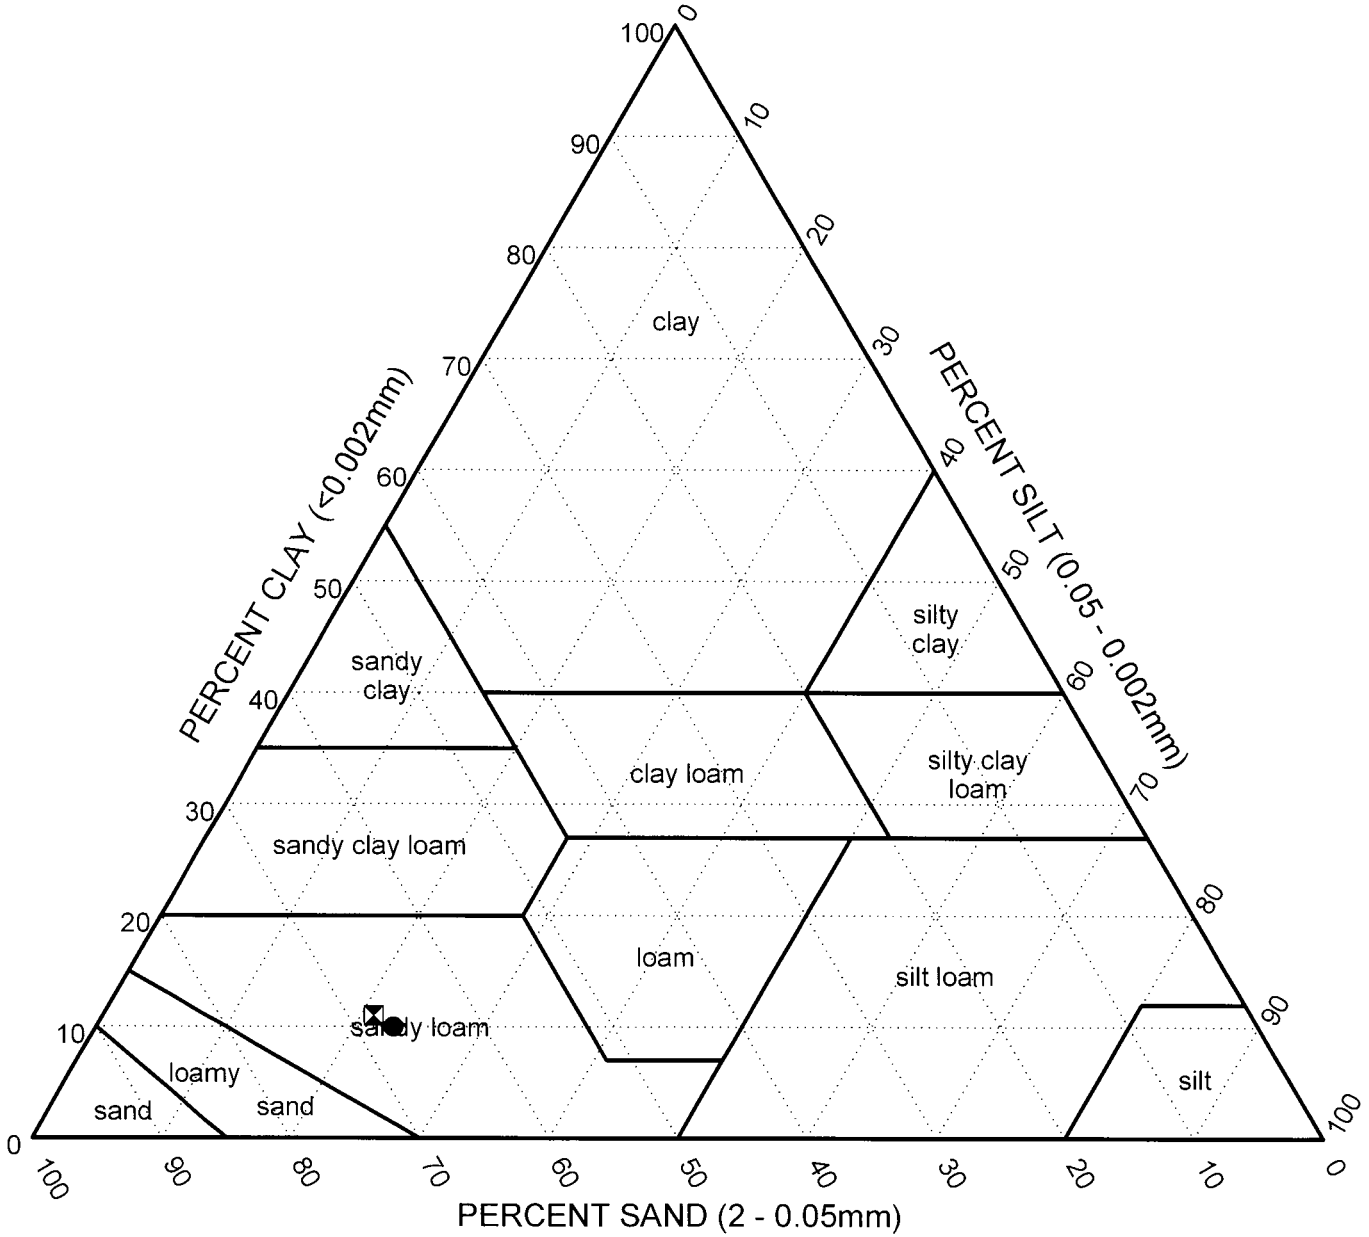

Borehole	Depth (ft)		USDA Classification	Textural Class	Permeability Class	Org. Cont. (%)	Silt (%)	Clay (%)	VFS (%)	Other Sand (%)	Gravel (%)
● 2	3.5	2-2	SANDY LOAM	2	2	2.6	22.4	10.2	20.0	47.4	0.3
⊠ 5	3.5	5-2	SANDY LOAM	2	2	2.4	21.0	11.0	21.9	46.1	0.7

If the percentage of the total sample retained above the 2 mm sieve is greater than 20%, subtract 1 from the permeability class shown above.

Fractions normalized to 100% passing the 2mm (#10) sieve



McIntosh Lalani Engineering


USDA GRAIN SIZE DISTRIBUTION

CLIENT GEC Architecture Ltd.

PROJECT NAME Drumheller Curling Club

PROJECT NUMBER ML-8855

PROJECT LOCATION _____

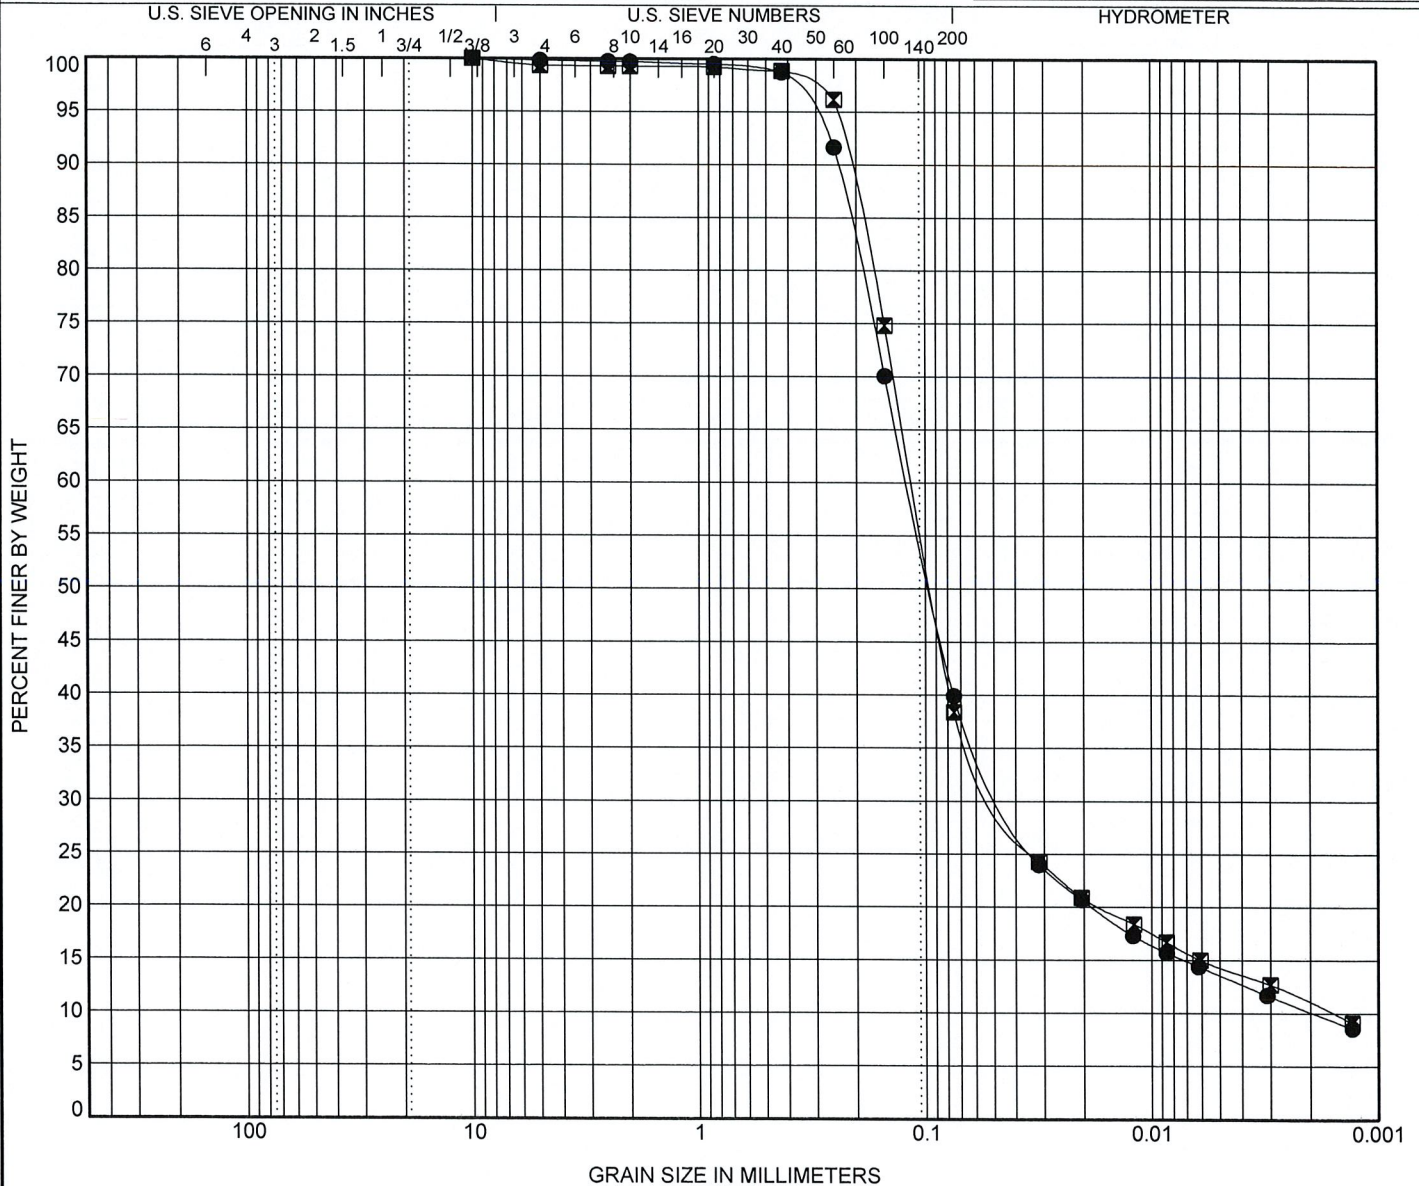

COBBLES	GRAVEL		OTHER SAND	VERY FINE SAND, SILT OR CLAY
	coarse	fine		

Specimen Identification	%Gravel	%OTHER SAND	%VFS	%Silt	%Clay
● BH-2 1.1 (m)	0.3	47.3	20.0	22.3	10.1
■ BH-5 1.1 (m)	0.7	45.8	21.7	20.8	11.0

Reviewed By: 

Data presented hereon is for the sole use of the stipulated client. ML is not responsible nor can be held liable for suse made of this report by any other party, with or without the knowledge of ML.

The testing services reported herein have been performed by an ML technician to recognized industry standards, unless otherwise noted. No other warranty is made. These data do not include or represent any interpretation or opinion of specification compliance or material suitability. Should engineering interpretation be required, ML will provide it upon written request.

USDA GRAIN SIZE DISTRIBUTION 8855 DRUMHELLER CURLING CLUB.GPJ GINT CANADA LAB.GDT 21/2/19

Project: Drumheller Curling Club			Drilling Information:			Borehole No.:1						
Client: GEC Architecture Ltd.			All Service Drilling Inc			Project No.:ML-8855						
			CME 55 track SS-Auger			Elevation:						
SAMPLE TYPE		■ SHELBY TUBE	▨ CORE SAMPLE	⊗ SPT SAMPLE	☐ GRAB SAMPLE	▩ AUGER SAMPLE	▨ NO RECOVERY					
BACKFILL TYPE		■ BENTONITE	▨ PEA GRAVEL	▨ SLOUGH	☐ GROUT	▨ DRILL CUTTINGS	▨ SAND					
Depth (m)	SOIL SYMBOL	SOIL DESCRIPTION	SAMPLE TYPE	SAMPLE NO	USCS	BLOWS /150 mm	PLASTICITY INDEX		POCKETPEN (kPa)	OTHER DATA	Well 1" SLOTTED PIEZOMETER	Elevation (m)
							PLASTIC	LIQUID				
0		TOPSOIL - dark brown organics, trace rubble approx. 450 mm thick.		1-1	TPSL							
0.5		Silty SAND - fine grain, loose, damp, trace coal, light to medium brown.		1-2		6.8						
1.5		- trace roots.		1-3	SM	7.8						
2.5		- trace clay, moist, trace oxides.		1-4								
3.5				1-5		2-2-3		24.1				
4.0		Sandy GRAVEL - coarse grain, fine gravel, well sorted, compact, moist, medium brown.		1-6								
5.0		- coarse gravel, wet.		1-7		8-16-12		12.4				
6.0				1-8								
7.0				1-9	GWS	5-14-20		16.7				
8.0		- trace organics, med grey.		1-10								
8.5				1-11		11-15-13		19.0				
9.1		END OF HOLE at a depth of 9.1 m. Slough to a depth of 6.1 m. 25 mm PVC standpipe installed to a depth of 9.1 m with 3.0 m slotted. Wet upon completion.		1-12								
9.1		Water Levels: Sept 25, 2018: 4.67 m EOH: 8.80 m										

ML STANDARD AUGER 8855 DRUMHELLER CURLING CLUB GPJ M-L STANDARD GDT 21/2/19



McIntosh Lalani Engineering
Calgary, AB
(403) 291-2345

Logged By: RC	Completion Depth: 30 ft
Reviewed By: Asad Shaikh	Drilled on: 9/14/2018
Groundwater Depth: m	Page 1 of 1

Project: Drumheller Curling Club			Drilling Information:			Borehole No.:2							
Client: GEC Architecture Ltd.			All Service Drilling Inc			Project No.:ML-8855							
			RK-10 SS-Auger			Elevation:							
SAMPLE TYPE		■ SHELBY TUBE	■ CORE SAMPLE	⊗ SPT SAMPLE	📏 GRAB SAMPLE	■ AUGER SAMPLE	▨ NO RECOVERY						
BACKFILL TYPE		■ BENTONITE	□ PEA GRAVEL	▨ SLOUGH	■ GROUT	▨ DRILL CUTTINGS	□ SAND						
Depth (m)	SOIL SYMBOL	SOIL DESCRIPTION	SAMPLE TYPE	SAMPLE NO	USCS	BLOWS /150 mm	PLASTICITY INDEX		POCKETPEN (kPa)	OTHER DATA	Well '2' SLOTTED PIEZOMETER	Well '2-B' SLOTTED PIEZOMETER	Elevation (m)
							PLASTIC	M.C. LIQUID					
							10 20 30 40		80 160 240 320				
0		TOPSOIL - dark brown organics, trace rubble approx. 400 mm thick.	■	2-1	TPSL								
1		Silty Sand FILL - fine grain, loose, damp, medium brown.	⊗	2-2									
2		- coal approx. 150 mm thick, trace rubble, trace gravel, trace roots.	⊗	2-3	FILL	3-3-2							
3		trace oxides, trace clay.	⊗	2-4									
4		Silty SAND - fine grain, loose, wet, trace oxides, trace roots, medium brown.	■	2-5	SM	2-3-4							
5			■	2-6									
6		Sandy GRAVEL - coarse grain, well sorted, wet, medium brown/orange.	⊗	2-7		6-9-9							
7		- no recovery in split spoon.	⊗	2-8	GWS	7-10-9							
8		- no recovery in split spoon.	■	2-9	CL-ML								
9		Silty SAND - trace gravel, some clay, loose, wet, medium blue/grey.	⊗	2-10	SM	3-3-6							
10			⊗	2-11									
11		Silty SAND - trace sand and gravel, soft, wet, low plastic, trace oxide, trace coal, medium brown.	⊗	2-12									
12			⊗	2-13									
13		Silty SAND - trace sand and gravel, stiff, moist-wet, low plastic, trace coal, medium blue/grey.	⊗	2-14		9-10-15							
14			⊗	2-15									
15		- medium to high plastic, damp, medium grey.	⊗	2-16	CL-ML	3-6-7							
16		- no recovery in split spoon.	⊗	2-17		4-5-7							
17			⊗	2-18									
18			⊗	2-19		3-6-8							
19			⊗	2-20									
20		END OF HOLE at a depth of 15.2 m. Slough to a depth of 11.8 m. 25 mm PVC standpipe installed to a depth of 14.4 m with 1.5 m slotted. Wet upon completion.											
21		WELL B: 25 mm PVC standpipe installed, (nested with 1 in same well) to a depth of 7.6 m with 1.5 m slotted. Wet upon completion.											
22		Water Levels: Sept 25, 2018: 11.58 m EOH: 12.78 m											
23		Well B: Sept 25, 2018: 6.12 m EOH: 7.57 m											

ML STANDARD AUGER 8855 DRUMHELLER CURLING CLUB.GPJ M-L STANDARD.GDT 21/2/19



McIntosh Lalani Engineering
Calgary, AB
(403) 291-2345

Logged By: RC
Reviewed By: Asad Shaikh
Groundwater Depth: m

Completion Depth: 50 ft
Drilled on: 9/13/2018
Page 1 of 1

Project: Drumheller Curling Club			Drilling Information:			Borehole No.:3										
Client: GEC Architecture Ltd.			All Service Drilling Inc			Project No.:ML-8855										
			CME 55 track SS-Auger			Elevation:										
SAMPLE TYPE			■ SHELBY TUBE	▣ CORE SAMPLE	⊗ SPT SAMPLE	☞ GRAB SAMPLE	▩ AUGER SAMPLE	▨ NO RECOVERY								
BACKFILL TYPE			■ BENTONITE	▣ PEA GRAVEL	▨ SLOUGH	☞ GROUT	▨ DRILL CUTTINGS	▨ SAND								
Depth (m)	SOIL SYMBOL	SOIL DESCRIPTION	SAMPLE TYPE	SAMPLE NO	USCS	BLOWS /150 mm	PLASTIC		M.C.	LIQUID	BLOW COUNT		POCKETPEN (kPa)	OTHER DATA	Well 3" SLOTTED PIEZOMETER	Elevation (m)
							10	20			30	40				
0		ASPHALT - approx. 50 mm thick.			ASPH											
0-1		Silty Sand FILL - trace gravel, trace clay, loose, damp, trace rubble, dark brown.		3-1	FILL											
1-2		Silty SAND - medium grain, trace clay, loose, damp, light to medium brown. - trace organics in split spoon.		3-2	SM	1-1-3			21.4							
2-3		- compact, moist.		3-3	SM											
3-4				3-4	SM	3-5-11			14.6							
4-5		Sandy GRAVEL - coarse grain, well sorted, compact, damp, medium brown, dark orange.		3-5	SM											
5-6		- trace cobbles, wet.		3-6	SM	15-20-21			10.2							
6-7				3-7	GWS											
7-8				3-8	SM	3-8-13			12.9							
8-9		Silty SAND - fine grain, trace clay, loose, wet, medium grey.		3-9	SM											
9-10				3-10	SM	1-4-4			22.5							
10-11				3-11	SM											
11				3-12	SM				27.8							
		END OF HOLE at a depth of 9.1 m. Slough to a depth of 6.1 m. 25 mm PVC standpipe installed to a depth of 6.1 m with 3.0 m slotted. Wet upon completion.														
		Water Levels: Sept 25, 2018: 4.57 m EOH: 5.92 m														

ML STANDARD AUGER 8855 DRUMHELLER CURLING CLUB.GPJ ML STANDARD.GDT 21/2/19



McIntosh Lalani Engineering
Calgary, AB
(403) 291-2345

Logged By: RC
Reviewed By: Asad Shaikh
Groundwater Depth: m

Completion Depth: 30 ft
Drilled on: 9/14/2018
Page 1 of 1

Project: Drumheller Curling Club			Drilling Information:			Borehole No.:4						
Client: GEC Architecture Ltd.			All Service Drilling Inc			Project No.:ML-8855						
			CME 55 track SS-Auger			Elevation:						
SAMPLE TYPE		■ SHELBY TUBE	▣ CORE SAMPLE	⊗ SPT SAMPLE	✎ GRAB SAMPLE	▩ AUGER SAMPLE	▨ NO RECOVERY					
BACKFILL TYPE		■ BENTONITE	▣ PEA GRAVEL	▨ SLOUGH	✎ GROUT	▩ DRILL CUTTINGS	▨ SAND					
Depth (m)	SOIL SYMBOL	SOIL DESCRIPTION	SAMPLE TYPE	SAMPLE NO	USCS	BLOWS /150 mm	PLASTICITY INDEX		POCKETPEN (kPa)	OTHER DATA	Well 4" SLOTTED PIEZOMETER	Elevation (m)
							PLASTIC	M.C. LIQUID				
0		ASPHALT - approx. 50 mm thick.			ASPH							
0-1		Silty Sand FILL - trace gravel, trace clay, loose, damp, trace rubble, dark brown.	▣	4-1	FILL							
1-2		Silty SAND - fine grain, loose, damp, trace roots, light brown.	▣	4-2			12.9					
2-3		- trace clay, moist.	⊗	4-3		2-2-2						
3-4			▣	4-4				23.9				
4-5			⊗	4-5	SM	3-2-3		21.7				
5-6		Sandy GRAVEL - coarse grain, well sorted, compact, damp, medium brown, dark orange.	⊗	4-6								
6-7		- wet, trace cobbles.	⊗	4-7		11-20-18		9.8				
7-8			⊗	4-8								
8-9			⊗	4-9	GWS	2-4-11		15.4				
9-10		Silty SAND - fine grain, trace gravel, loose, wet, medium grey/green.	▣	4-10								
10-11		- trace organics.	⊗	4-11	SM	3-4-5		26.3				
11		END OF HOLE at a depth of 9.1 m. Slough to a depth of 6.1 m. 25 mm PVC standpipe installed to a depth of 7.0 m with 3.0 m slotted. Wet upon completion. Water Levels: Sept 25, 2018: 5.08 m EOH: 6.92 m	▣	4-12				20.5				

ML STANDARD AUGER 8855 DRUMHELLER CURLING CLUB.GPJ M-L STANDARD.GDT 2/12/19



McIntosh Lalani Engineering
Calgary, AB
(403) 291-2345

Logged By: RC

Reviewed By: Asad Shaikh

Groundwater Depth: m

Completion Depth: 30 ft

Drilled on: 9/14/2018

Page 1 of 1

Project: Drumheller Curling Club			Drilling Information:			Borehole No.:5					
Client: GEC Architecture Ltd.			All Service Drilling Inc			Project No.:ML-8855					
			CME 55 track SS-Auger			Elevation:					
SAMPLE TYPE		■ SHELBY TUBE	▣ CORE SAMPLE	⊗ SPT SAMPLE	Ⓜ GRAB SAMPLE	▩ AUGER SAMPLE	▨ NO RECOVERY				
BACKFILL TYPE		■ BENTONITE	▣ PEA GRAVEL	▨ SLOUGH	Ⓜ GROUT	▨ DRILL CUTTINGS	⊗ SAND				
Depth (m)	SOIL SYMBOL	SOIL DESCRIPTION	SAMPLE TYPE	SAMPLE NO	USCS	BLOWS /150 mm	PLASTIC M.C. LIQUID		OTHER DATA	Well 15' SLOTTED PIEZOMETER	Elevation (m)
							10 20 30 40	80 160 240 320			
0		ASPHALT - approx. 50 mm thick.	■	5-1	ASPH						
0.5		Silty Sand FILL - trace gravel, trace clay, loose, damp, trace rubble, dark brown.	■	5-2	FILL	6.5					
1		Silty SAND - fine grain, loose, damp, trace roots, light brown.	⊗	5-3		9.4					
2		- trace clay, moist.	■	5-4	SM						
3			⊗	5-5		15.5					
4		Sandy GRAVEL - coarse grain, well sorted, compact, damp, medium brown, dark orange.	⊗	5-6							
5		- wet, trace cobbles, trace organics.	⊗	5-7		8.0					
6			■	5-8	GWS						
7			⊗	5-9		13.7					
8		Silty SAND - fine grain, some clay, loose, wet, medium grey.	■	5-10	SM			34.2			
8.5		Sandy GRAVEL - coarse grain, well sorted, compact, damp, trace cobbles, medium brown, dark orange.	⊗	5-11		21.3					
9		- no recovery in split spoon, no recovery on auger.	⊗	5-12	GWS	20-15-15					
10		- no recovery on auger.	⊗	5-13		6-7-10	8.4				
11			■	5-14							
12		Shale BEDROCK - weathered, weak, damp, light grey.	⊗	5-15	BE			23.8			
13		Coal BEDROCK - weathered weak, wet, black.	⊗	5-16	BE	24-25-16					
14			⊗	5-17	BE			35.0			
15			⊗	5-18	BE	14-20-27					
		END OF HOLE at a depth of 13.7 m. Slough to a depth of 6.1 m. 25 mm PVC standpipe installed to a depth of 8.2 m with 3.0 m slotted. Wet upon completion.									
		Water Levels: Sept 25, 2018: 5.46 m EOH: 8.25 m									
						BLOW COUNT		POCKETPEN (kPa)			

ML STANDARD AUGER 8855 DRUMHELLER CURLING CLUB.GPJ ML STANDARD.GDT 21/12/19



McIntosh Lalani Engineering
Calgary, AB
(403) 291-2345

Logged By: RC
Reviewed By: Asad Shaikh
Groundwater Depth: m

Completion Depth: 45 ft
Drilled on: 9/14/2018
Page 1 of 1

Project: Drumheller Curling Club		Drilling Information:		Borehole No.:6								
Client: GEC Architecture Ltd.		All Service Drilling Inc		Project No.:ML-8855								
		CME 55 track SS-Auger		Elevation:								
SAMPLE TYPE		■ SHELBY TUBE	■ CORE SAMPLE	⊗ SPT SAMPLE	☞ GRAB SAMPLE	▨ AUGER SAMPLE	▨ NO RECOVERY					
BACKFILL TYPE		■ BENTONITE	□ PEA GRAVEL	▨ SLOUGH	☞ GROUT	▨ DRILL CUTTINGS	□ SAND					
Depth (m)	SOIL SYMBOL	SOIL DESCRIPTION	SAMPLE TYPE	SAMPLE NO	USCS	BLOWS /150 mm	PLASTICITY INDEX		POCKETPEN (kPa)	OTHER DATA	Well '6' SLOTTED PIEZOMETER	Elevation (m)
							PLASTIC	M.C. LIQUID				
0		ASPHALT - approx. 50 mm thick.			ASPH FILL							
0-1		Silty Sand FILL - trace gravel, trace clay, loose, damp, trace rubble, dark brown.	■	6-1								
1-2		Silty SAND - fine grain, loose, damp, trace roots, light brown.	■	6-2	SM	3-4-3	10.6					
2-3		- trace clay.	⊗	6-3								
3-4		- trace clay.	⊗	6-4		3-4-6	21.5					
4-5		Sandy GRAVEL - coarse grain, well sorted, compact, damp, medium brown, dark orange.	■	6-5								
5-6		- wet, trace cobbles.	⊗	6-6		10-14-16	8.4					
6-7			■	6-7	GWS		13.3					
7-8		Silty CLAY - trace gravel, low plastic, firm, wet, medium grey.	⊗	6-8		7-12-12						
8-9		no recovery in split spoon.	⊗	6-9			18.8					
9-10			■	6-10	SM	5-3-3						
10-11		END OF HOLE at a depth of 9.1 m. Slough to a depth of 6.1 m. 25 mm PVC standpipe installed to a depth of 6.1 m with 3.0 m slotted. Wet upon completion.										
		Water Levels: Sept 25, 2018: 5.38 m EOH: 6.07 m										

ML STANDARD AUGER 8855 DRUMHELLER CURLING CLUB.GPJ M.L. STANDARD.GDT 21/2/19



McIntosh Lalani Engineering
Calgary, AB
(403) 291-2345

Logged By: RC	Completion Depth: 30 ft
Reviewed By: Asad Shaikh	Drilled on: 9/14/2018
Groundwater Depth: m	Page 1 of 1

Project: Drumheller Curling Club		Drilling Information:		Borehole No.:7								
Client: GEC Architecture Ltd.		All Service Drilling Inc		Project No.:ML-8855								
		RK-10 SS-Auger		Elevation:								
SAMPLE TYPE		■ SHELBY TUBE	▣ CORE SAMPLE	⊗ SPT SAMPLE	✎ GRAB SAMPLE	▩ AUGER SAMPLE	▨ NO RECOVERY					
BACKFILL TYPE		■ BENTONITE	▣ PEA GRAVEL	▨ SLOUGH	▩ GROUT	▨ DRILL CUTTINGS	▣ SAND					
Depth (m)	SOIL SYMBOL	SOIL DESCRIPTION	SAMPLE TYPE	SAMPLE NO	USCS	BLOWS /150 mm	PLASTICITY INDEX		POCKETPEN (kPa)	OTHER DATA	Well 7' SLOTTED PIEZOMETER	Elevation (m)
							PLASTIC	M.C. LIQUID				
							10 20 30 40	10 20 30 40	80 160 240 320			
0		TOPSOIL - dark brown organics, trace rubble approx. 450 mm thick. over clayey silt loam	▣	7-1	TPSL							
1		Silty SAND - trace gravel, loose, damp, trace roots, light brown.	▣	7-2		7.8						
2		- trace coal.	⊗	7-3		2-3-3						
3			▣	7-4	SM	19.5						
4			⊗	7-5		3-3-4						
5		Sandy GRAVEL - coarse grain, well sorted, compact, wet, trace cobbles, medium brown, dark orange.	⊗	7-6		10.0						
6			⊗	7-7		5-10-13						
7		Silty CLAY - trace sand and gravel, soft, moist, low plastic, medium brown.	⊗	7-8	GWS	13.7						
8			⊗	7-9	CL-ML	21.3						
9		Sandy GRAVEL - some clay, coarse, compact, medium brown.	▣	7-10		3-4-4						
10		Silty CLAY - trace sand and coarse gravel, stiff, moist, low plastic, medium grey.	⊗	7-11	GWS	17.5						
11		- no recovery in split spoon.	⊗	7-12		9-8-10						
12			▣	7-13	CL-ML	16.0						
13		- no recovery in split spoon.	⊗	7-14		4-6-8						
14			▣	7-14		19.0						
		END OF HOLE at a depth of 12.2 m. Slough to a depth of 10.6 m. 25 mm PVC standpipe installed to a depth of 12.2 m with 3.0 m slotted. Wet upon completion.										
		Water Levels: Sept 25, 2018: 9.68 m EOH: 11.82 m										
		[SO ₄] = 0.041%										


ML STANDARD AUGER 8855 DRUMHELLER CURLING CLUB.GPJ ML STANDARD.GDT 21/2/19



McIntosh Lalani Engineering
Calgary, AB
(403) 291-2345

Logged By: RC	Completion Depth: 40 ft
Reviewed By: Asad Shaikh	Drilled on: 9/13/2018
Groundwater Depth: m	Page 1 of 1

Project: Drumheller Curling Club		Drilling Information:		Borehole No.:8		
Client: GEC Architecture Ltd.		All Service Drilling Inc		Project No.:ML-8855		
		CME 55 track SS-Auger		Elevation:		
SAMPLE TYPE	■ SHELBY TUBE	▨ CORE SAMPLE	⊗ SPT SAMPLE	☞ GRAB SAMPLE	▩ AUGER SAMPLE	▨ NO RECOVERY
BACKFILL TYPE	■ BENTONITE	▨ PEA GRAVEL	▨ SLOUGH	☞ GROUT	▨ DRILL CUTTINGS	▨ SAND

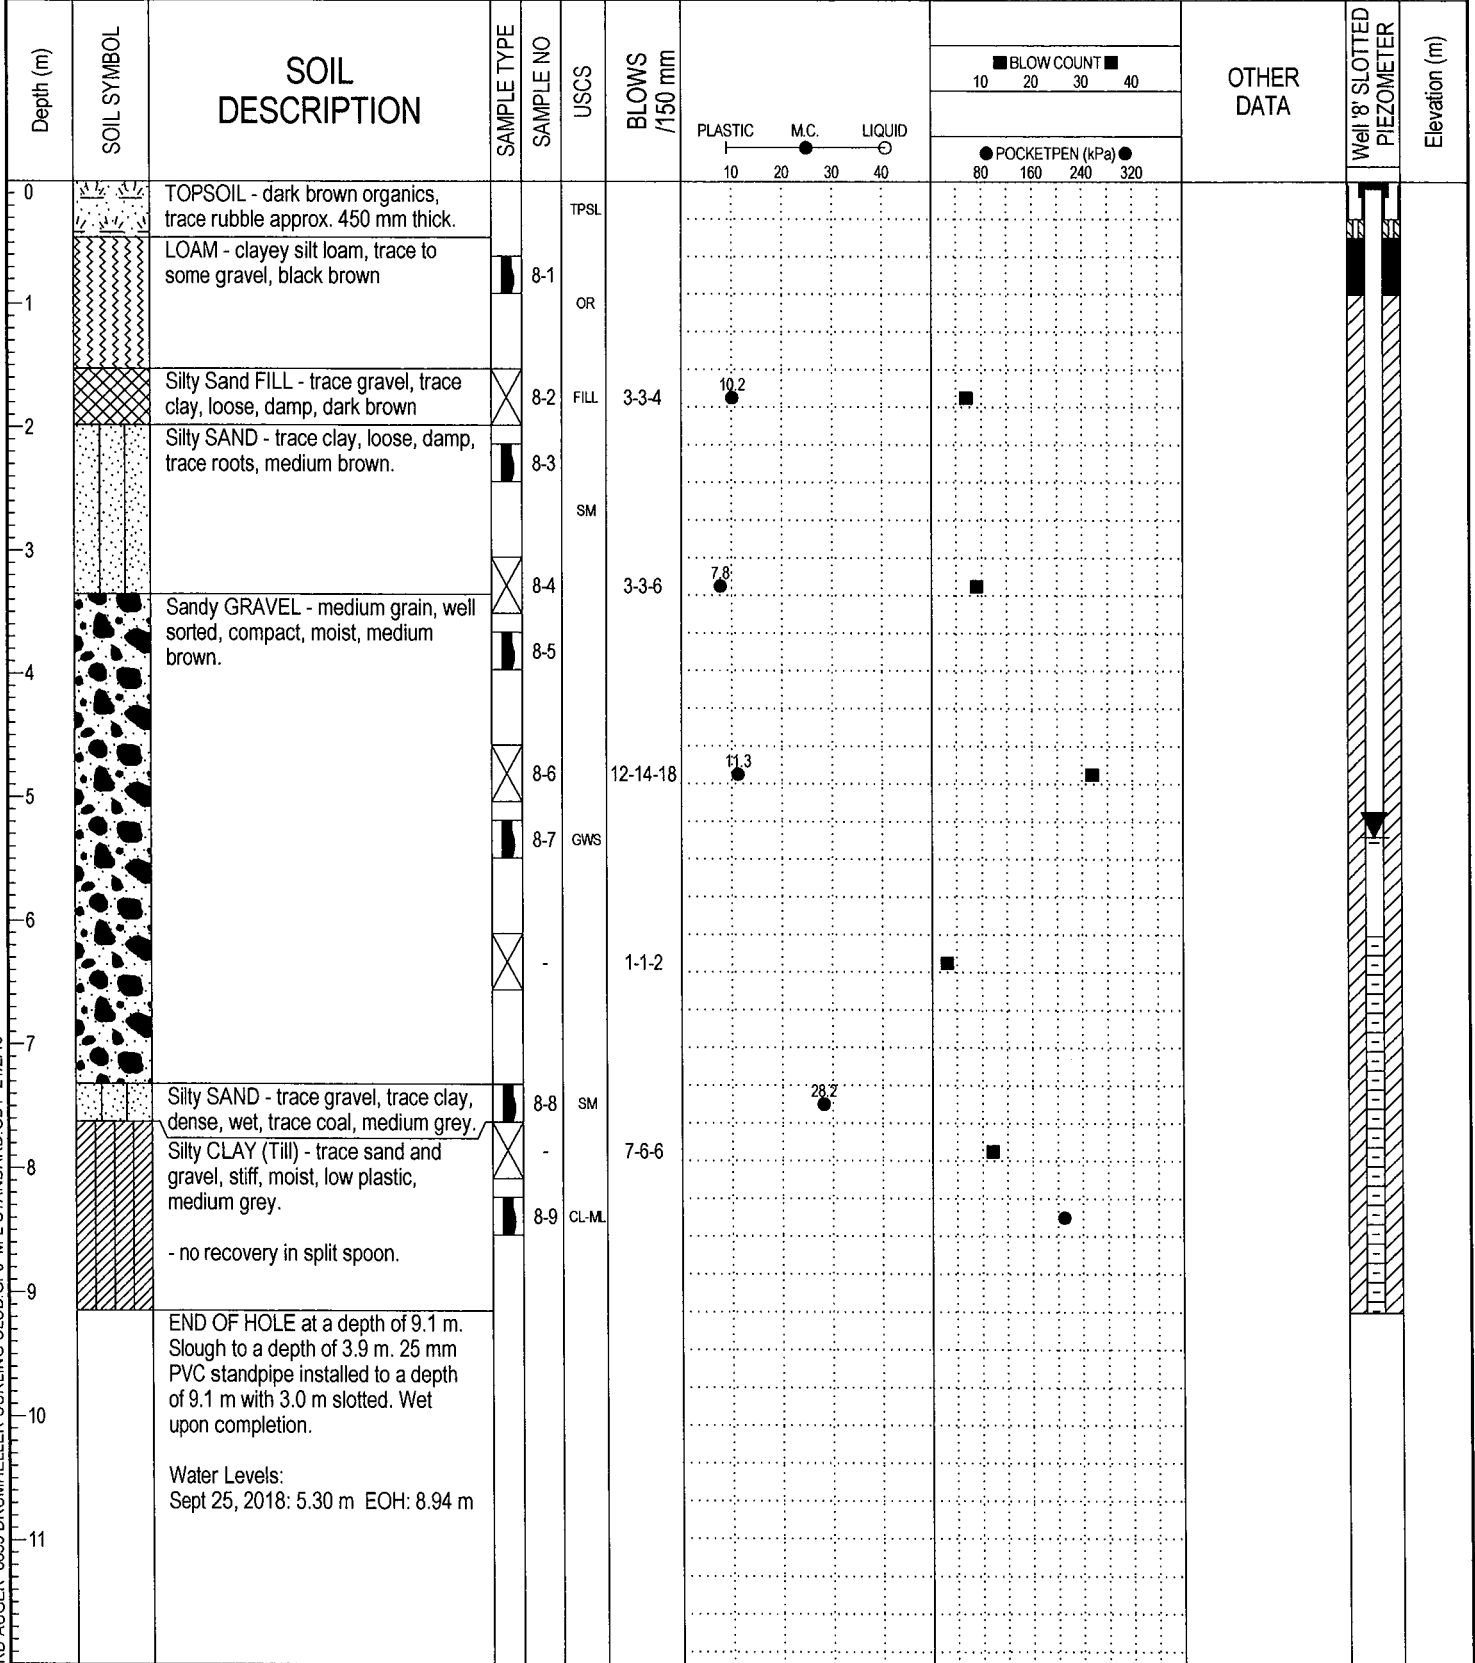

ML STANDARD AUGER 8855 DRUMHELLER CURLING CLUB.GPJ M-L STANDARD.GDT 21/2/19

	McIntosh Lalani Engineering Calgary, AB (403) 291-2345	Logged By: RC	Completion Depth: 30 ft
		Reviewed By: Asad Shaikh	Drilled on: 9/14/2018
		Groundwater Depth: m	Page 1 of 1